



BRILUMEN DATA SHEET

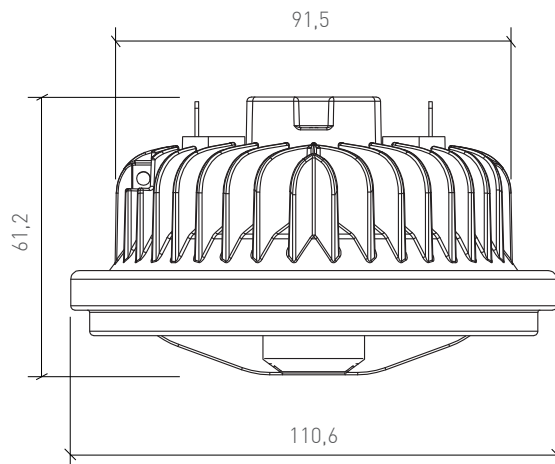


WATTAGE POTÊNCIA	CURRENT CORRENTE	CLASS III CLASSE III	IP20	CRI > 90	24°/38°		

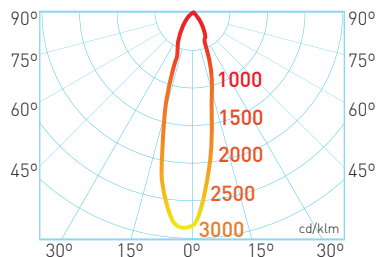

AR111 30W 3000K CRI90 24°

1m	Ø0,44m	6.542 lx
2m	Ø0,87m	1.636 lx
3m	Ø1,3m	727 lx
4m	Ø1,73m	409 lx
5m	Ø2,17m	262 lx
6m	Ø2,6m	182 lx

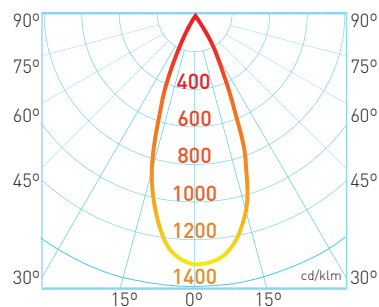

AR111 30W 3000K CRI90 38°

1m	Ø0,73m	3.147 lx
2m	Ø1,44m	787 lx
3m	Ø2,15m	350 lx
4m	Ø2,90m	197 lx
5m	Ø3,60m	126 lx
6m	Ø4,30m	87,3 lx

ORDER OPTIONS OPÇÕES DE ENCOMENDA

PRODUCT CODE	POWER	CRI	BEAM ANGLE	CCT	LED LUMENS	LUMINAIRE LUMENS
347.90.24.30	30W	>90	24°	3000K	2343 lm	1757 lm
347.90.24.40		>90	24°	4000K	2717 lm	2038 lm
347.90.38.30		>90	38°	3000K	2343 lm	1757 lm
347.90.38.40		>90	38°	4000K	2717 lm	2038 lm