

brilumen®
www.brilumen.com

Lighting emotions!

TINKER BELL

CEILING RECESSED

INDOOR LIGHTING
ILUMINAÇÃO DE INTERIOR

TINKER BELL

CEILING RECESSED





When the night hides the light, light up the stars with the new Tinker Bell and provide a beautiful light to your room, making it stunning. Thanks to its small size, with this mini spot it's possible to create numerous designs on the ceiling or wall, and with a colour rendering index higher than 85. Due to its textured white finish and high IP rating, this versatile product can be installed in numerous locations, working as ambient light and complementing the remaining light fittings, or even as a presence light in halls, lifts, etc.


NOTE: This product works at 350mA constant current, requiring an external drive to connect the luminaires to 230 Volts.

Quando a noite esconde a luz, acenda as estrelas com o novo Tinker Bell e proporcione uma luz bonita ao seu espaço, tornando-o deslumbrante. Graças às suas dimensões reduzidas, com este mini spot é possível criar inúmeros designs no teto ou parede e com um índice de reprodução cromática superior a 85. Devido ao seu acabamento em branco texturado e IP elevado, este produto versátil pode ser instalado em inúmeros locais, funcionando como luz ambiente e complementando as restantes luminárias, ou até como luz de presença em corredores, elevadores, etc.

NOTA: Esta luminária funciona a corrente constante de 350mA, necessitando de drivers externos para efetuar a ligação a 230 Volts.

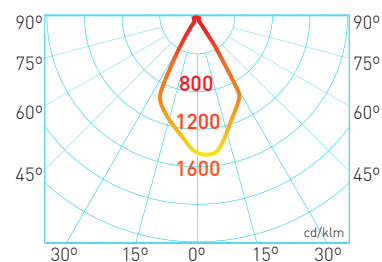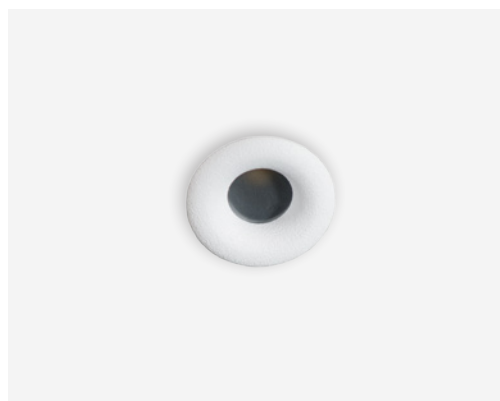

1m	Ø1,05m	32,8 lx
2m	Ø2,11m	8,2 lx
3m	Ø3,16m	3,65 lx
4m	Ø4,22m	2,05 lx
5m	Ø5,27m	1,31 lx
6m	Ø6,33m	0,91 lx





ORDER OPTIONS OPÇÕES DE ENCOMENDA

PRODUCT CODE	POWER	BEAM ANGLE	CRI	CCT	LED LUMENS	LUMINAIRE LUMENS
340.85.50.30.TW	1 W	50°	>85	3000K	120 lm	40 lm
340.85.50.40.TW	1 W	50°	>85	4000K	125 lm	45 lm

ACCESSORIES OPTIONS OPÇÕES DE ACESSÓRIOS

PRODUCT CODE	DESCRIPTION
8015-0222	Driver for TinkerBell 1-3 pieces, 350mA Driver para TinkerBell 1-3 unidades, 350mA
8015-0224	Driver for TinkerBell 4-5 pieces, 350mA Driver para TinkerBell 4-5 unidades, 350mA
8030-0004	Distributor with 6 outputs Distribuidor com 6 saídas
8030-0008	Distributor shunt Shunt para distribuidor
4080-1030	Waterproof box 81x83x55mm: 1 cable gland input of 4,8mm and 5 outputs Caixa estanque 81x83x55mm: 1 buçim de entrada de 4,8mm e 5 saídas
4080-1031	Output cable gland for waterproof box Bucim de saída p/ caixa estanque
4080-1033	Cover for waterproof box Tampa p/ caixa estanque

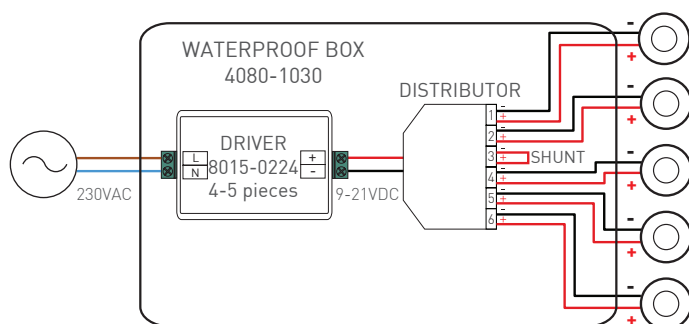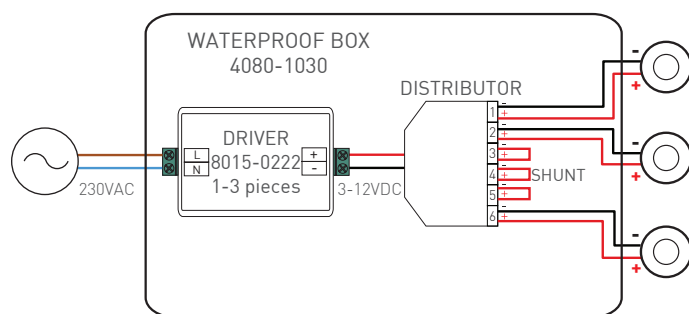



brilumen®

(+351) 220 920 550 - info@brilumen.com - www.brilumen.com