
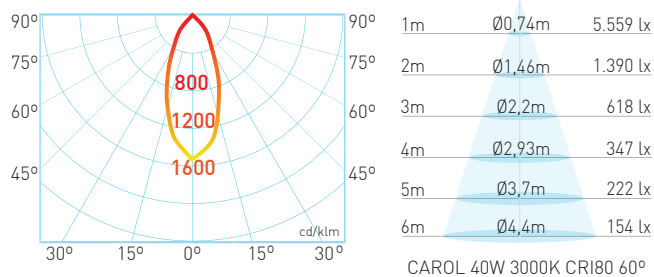
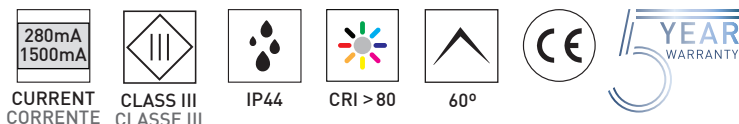


BRILUMEN DATA SHEET

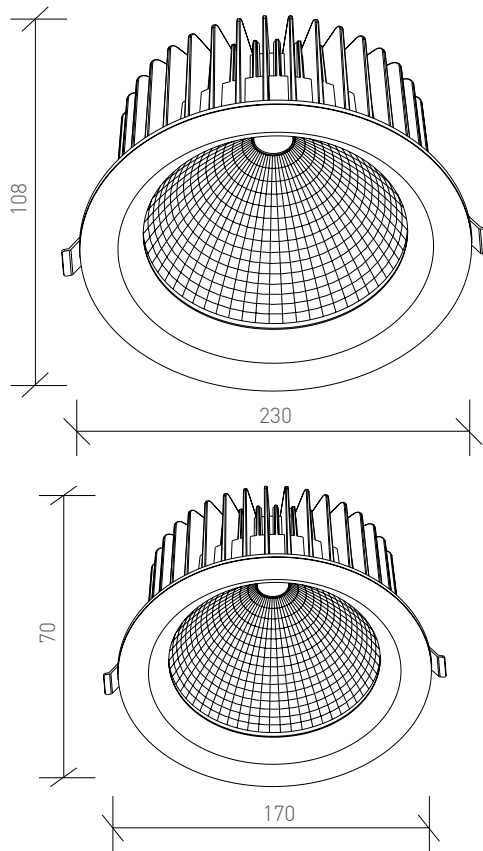

ORDER OPTIONS OPÇÕES DE ENCOMENDA

PRODUCT CODE	POWER	CRI	BEAM ANGLE	CURRENT	HOLE FURO	LED LUMENS	LUMINAIRE LUMENS
370.80.60.CT.TW	15 W	>80	60°	280mA	145 mm	1645 lm	1500 lm
371.80.60.CT.TW	20 W	>80	60°	280mA	145 mm	2090 lm	1900 lm
372.80.60.CT.TW	30 W	>80	60°	450mA	205 mm	3335 lm	3030 lm
373.80.60.CT.TW	40 W	>80	60°	600mA	205 mm	4235 lm	3850 lm
374.80.60.CT.TW	60 W	>80	60°	1500mA	205 mm	6050 lm	5500 lm

.CT

COLOUR TEMPERATURE OPTIONS
OPÇÕES DE TEMPERATURA DA COR

Please change .CT by one of the following options.
Por favor altere .CT por uma das seguintes opções.

1° suffix: .30 3000K .40 4000K