



## BRILUMEN DATA SHEET

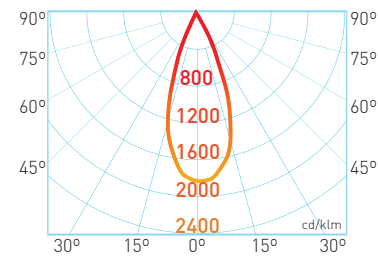

Distance (m)	Beam Diameter (Ø)	Illuminance (lx)
1m	Ø0,7m	1.446 lx
2m	Ø1,4m	362 lx
3m	Ø2,2m	161 lx
4m	Ø2,9m	90,4 lx
5m	Ø3,6m	57,9 lx
6m	Ø4,3m	40,1 lx

SINGLE CRYSTAL 36°

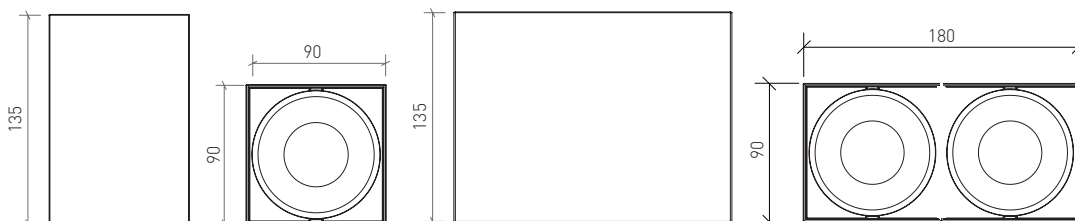

Distance (m)	Beam Diameter (Ø)	Illuminance (lx)
1m	Ø0,7m	2.892 lx
2m	Ø1,4m	724 lx
3m	Ø2,2m	322 lx
4m	Ø2,9m	180,8 lx
5m	Ø3,6m	115,8 lx
6m	Ø4,3m	80,2 lx

DOUBLE CRYSTAL 36°



## ORDER OPTIONS OPÇÕES DE ENCOMENDA

ON REQUEST: Dimmable options  
 SOB PEDIDO: Opções dimáveis

PRODUCT NAME	PRODUCT CODE	POWER	BEAM ANGLE	CRI	CCT	LED LUMENS	LUMINAIRE LUMENS
CRYSTAL	333.90.36.30.FI	10W	36°	>90	3000K	870 lm	750 lm
	333.90.36.40.FI	10W	36°	>90	4000K	911 lm	786 lm
	333.90.60.30.FI	10W	60°	>90	3000K	870 lm	790 lm
	333.90.60.40.FI	10W	60°	>90	4000K	911 lm	825 lm
DOUBLE CRYSTAL CRYSTAL DUPLO	334.90.36.30.FI	20W	36°	>90	3000K	1706 lm	1472 lm
	334.90.36.40.FI	20W	36°	>90	4000K	1822 lm	1572 lm
	334.90.60.30.FI	20W	60°	>90	3000K	1706 lm	1546 lm
	334.90.60.40.FI	20W	60°	>90	4000K	1822 lm	1650 lm

### .FI

FINISHING OPTIONS  
OPÇÕES DE ACABAMENTO

Please change .FI by one of the following options.  
Por favor altere .FI por uma das seguintes opções.

1° suffix: RAL9003 RAL9017