



BRILUMEN DATA SHEET

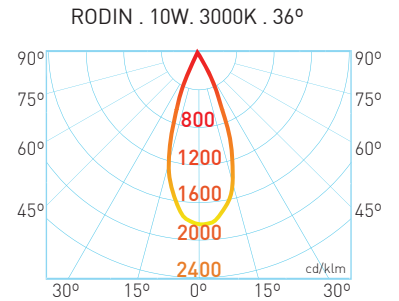

1m	Ø0,7m	1.522 lx
2m	Ø1,4m	381 lx
3m	Ø2,2m	169 lx
4m	Ø2,9m	95,2 lx
5m	Ø3,6m	60,9 lx
6m	Ø4,3m	42,2 lx

10W WATTAGE POTÊNCIA	500mA CURRENT CORRENTE	CLASS III CLASSE III	IP54	CRI > 90	36°/60°	83mm	30°	TYPE		
-----------------------------------	-------------------------------------	--------------------------------	-------------	--------------------	----------------	-------------	------------	-------------	--	--

			ON REQUEST: Dimmable options SOB PEDIDO: Opções dimáveis
--	--	--	---

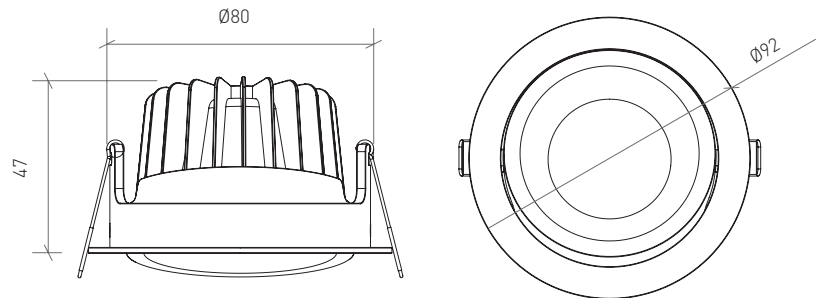

ORDER OPTIONS OPÇÕES DE ENCOMENDA

PRODUCT CODE	POWER	BEAM ANGLE	CRI	CCT	LED LUMENS	LUMINAIRE LUMENS
325.90.36.30.FI	10W	36°	>90	3000K	870lm	750lm
325.90.36.40.FI	10W	36°	>90	4000K	911lm	786lm
325.90.60.30.FI	10W	60°	>90	3000K	870lm	790lm
325.90.60.40.FI	10W	60°	>90	4000K	911lm	825lm

.FI

FINISHING OPTIONS
OPÇÕES DE ACABAMENTO

Please change .FI by one of the following options.
Por favor altere .FI por uma das seguintes opções.

1° suffix : TW RAL9003 TB RAL9017