



britumen[®]

www.britumen.com

Lighting emotions!

ELLINGTON

FLOOD LIGHT

OUTDOOR LIGHTING
ILUMINAÇÃO DE EXTERIOR

ELLINGTON

FLOOD LIGHT




The growing need to find a powerful and versatile luminaire that can serve as a floodlight or as an industrial light fitting, led Brilumen to present an efficient solution that meets these two requirements, the Ellington product range. These floodlights can light up buildings facades, as they have an IP65, ingress protection rating suitable for outdoor areas, and can be installed on the floor or the wall.


At the same time, the Ellington has got 60° and 90° beam angles, 50W, 100W, 150W, 200W or 300W and can be suspended with the right kit, technical features that allow you to convert this type of floodlight into a light fitting suitable for lighting industrial areas, assembly lines, warehouses, etc. Few luminaires on the market enable this versatility combined with the high power and a higher light efficiency.

A crescente necessidade de encontrar uma luminária industrial potente e versátil que possa servir tanto de projetor como de campânula industrial, levou a Brilumen a apresentar uma solução eficiente que obedeça a estes dois requisitos, a gama de produtos Ellington. Estes projetores podem iluminar fachadas de edifícios, pois possuem um IP65, índice de proteção adequado para zonas de exterior, e podem ser instalados no pavimento ou na parede.

Ao mesmo tempo, os Ellington têm ângulos de feixe de 60° ou 90°, potências de 50W, 100W, 150W, 200W ou 300W e podem ser suspensos com o kit adequado, características técnicas que permitem converter este tipo de projetor numa campânula adequada para iluminar áreas industriais, linhas de montagem, armazéns, etc. Poucas luminárias no mercado permitem esta versatilidade aliada a uma potência elevada e a uma eficiência luminosa considerável.


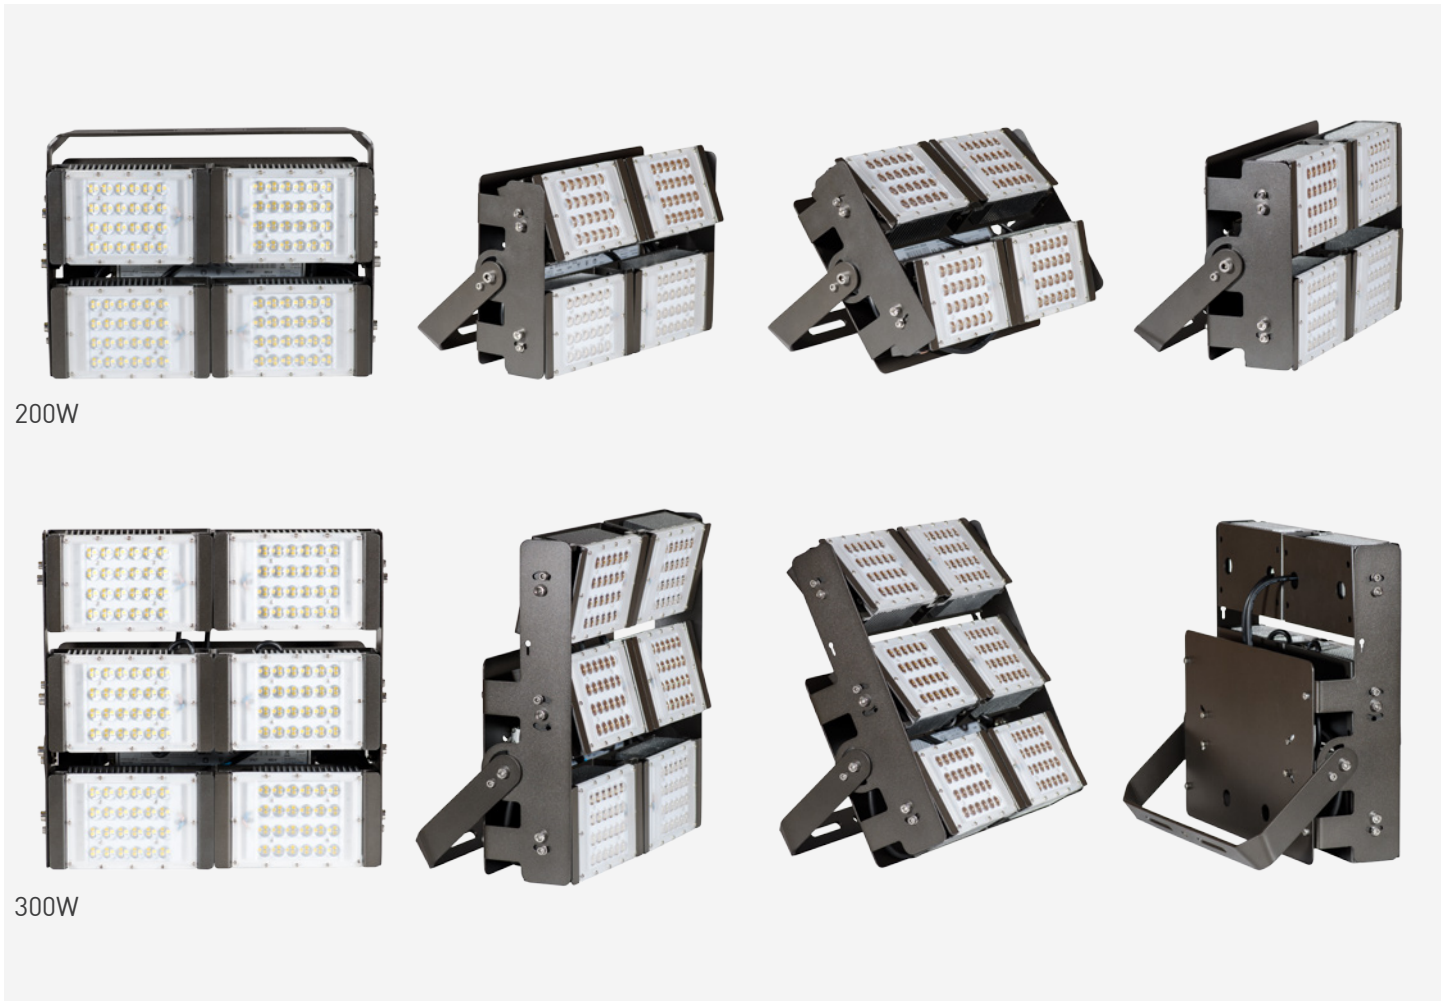


-  **CE**
-  **230V**
VOLTAGE
TENSÃO
-  **CLASS I**
CLASSE I
-  **IP65**
-  **60°/90°**
-  **15°**
-  **CRI >80**
-  **ON
OFF**
TYPE
-  **MADE IN
PORTUGAL**
-  **5
YEAR
WARRANTY**
-  **DI**
0-10V
- ON REQUEST: Dimmable options**
SOB PEDIDO: Opções dimáveis

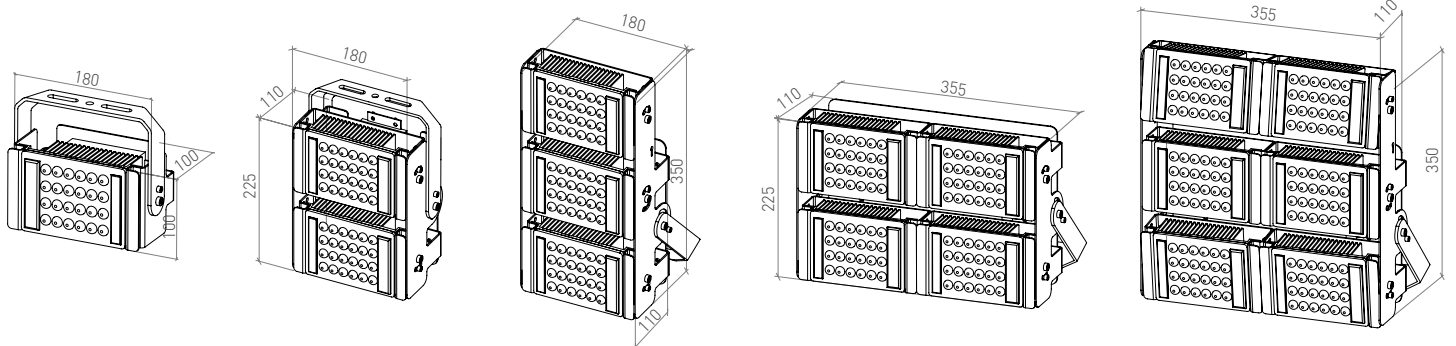

ELLINGTON

FLOOD LIGHT

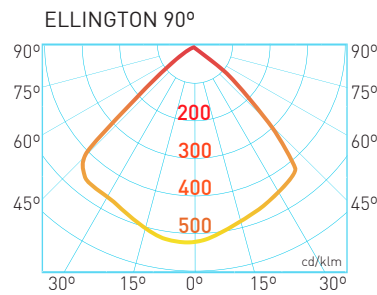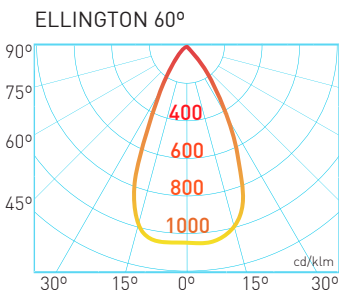

ELLINGTON_50W_60°_6500K

1m	Ø0,96m	6.984 lx
2m	Ø1,93m	1.746 lx
3m	Ø2,90m	776 lx
4m	Ø3,85m	436 lx
5m	Ø4,82m	279 lx
6m	Ø5,78m	194 lx

ELLINGTON_50W_90°_6500K

1m	Ø2,05m	3.475 lx
2m	Ø4,15m	869 lx
3m	Ø6,20m	386 lx
4m	Ø8,20m	217 lx
5m	Ø10,30m	139 lx
6m	Ø12,35m	96,4 lx

ELLINGTON_300W_60°_6500K

1m	Ø0,96m	41.902 lx
2m	Ø1,93m	10.476 lx
3m	Ø2,90m	4.656 lx
4m	Ø3,85m	2.619 lx
5m	Ø4,82m	1.676 lx
6m	Ø5,78m	1.163 lx

ELLINGTON_300W_90°_6500K

1m	Ø2,05m	20.849 lx
2m	Ø4,15m	5.212 lx
3m	Ø6,20m	2.317 lx
4m	Ø8,20m	1.303 lx
5m	Ø10,30m	834 lx
6m	Ø12,35m	579 lx

ORDER OPTIONS

OPÇÕES DE ENCOMENDA

ORDER CODE	POWER	CRI	BEAM ANGLE	CCT	LED LUMENS	LUMINAIRE LUMENS
4011-396.60.CT	50W	>80	60°	4200K 6500K	6600lm	6270lm
4011-396.90.CT	50W	>80	90°		6600lm	6270lm
4011-397.60.CT	100W	>80	60°		13.200lm	12.540lm
4011-397.90.CT	100W	>80	90°		13.200lm	12.540lm
4011-398.60.CT	150W	>80	60°		19.800lm	18.810lm
4011-398.90.CT	150W	>80	90°		19.800lm	18.810lm
4011-399.60.CT	200W	>80	60°		26.400lm	25.080lm
4011-399.90.CT	200W	>80	90°		26.400lm	25.080lm
4011-400.60.CT	300W	>80	60°		39.600lm	37.620lm
4011-400.90.CT	300W	>80	90°		39.600lm	37.620lm

.CT

COLOUR TEMPERATURE OPTIONS
OPÇÕES DE TEMPERATURA DA COR

Please change .CT by one of the following options.
Por favor altere .CT por uma das seguintes opções.

.42 4200K

.65 6500K

