


BRILUMEN DATA SHEET


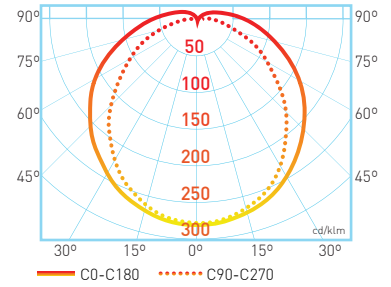


1m	Ø3,3m	1.372 lx
2m	Ø7,2m	343 lx
3m	Ø10,6m	152 lx
4m	Ø14,1m	85,7 lx
5m	Ø17m	54,9 lx
6m	Ø19,8m	38,1 lx

SIFTOS 36W 1200mm 4000K CRI80 PMMA

1m	Ø3,3m	1.715 lx
2m	Ø7,2m	429 lx
3m	Ø10,6m	191 lx
4m	Ø14,1m	107 lx
5m	Ø17m	68,6 lx
6m	Ø19,8m	47,6 lx

SIFTOS 45W 1500mm 4000K CRI80 PMMA



SIFTOS MO IP65 LED (diffuser PMMA Opal - difusor PMMA opalino)



ORDER CODE	POWER	CRI	BEAM ANGLE	LENGTH	CCT	LED LUMENS	LUMINAIRE LUMENS	LUMINAIRE EFFICACY	LIFETIME L70B50
743.80.120.12.MO.40	36 W	>80	120°	1200mm	4000K	4900lm	4557lm	120lm/W	→ 50.000 H
744.80.120.15.MO.40	45 W	>80	120°	1500mm		6130lm	5701lm	121lm/W	→ 50.000 H

SIFTOS PC IP67/IK10 LED (diffuser opal polycarbonate - difusor polycarbonato opalino)

ORDER CODE	POWER	CRI	BEAM ANGLE	LENGTH	CCT	LED LUMENS	LUMINAIRE LUMENS	LUMINAIRE EFFICACY	LIFETIME L70B50
745.80.120.12.PC.40	36 W	>80	120°	1200mm	4000K	4900lm	4312lm	115lm/W	→ 50.000 H
746.80.120.15.PC.40	45 W	>80	120°	1500mm		6130lm	5394lm	115lm/W	→ 50.000 H