



OLYMPIA & HELIUS

RINGS OF EMOTIONS

brilumen®

brilumen®
OLYMPIA



A CONTINUOUS CIRCULAR
LINE OF LIGHT.

*UMA LINHA DE LUZ CIRCULAR CONTÍNUA. / UNE LIGNE DE LUMIÈRE CIRCULAIRE CONTINUE.




----- OVERVIEW -----

					
Type of Application		Suspended	Surface Mounted	Suspended	Surface Mounted
					
000	Article Number	180	181	190	191
XX	Control Type	NF. - ON/OFF		NF. - ON/OFF	
		DA. - DALI		DA. - DALI	
		CS. - CASAMBI		CS. - CASAMBI	
Ø	Dimensions	.06 - 75 x 60 x Ø620 mm .09 - 75 x 60 x Ø920 mm .12 - 75 x 60 x Ø1220 mm .15 - 75 x 60 x Ø1520 mm		.04 - 75 x 60 x Ø400 mm .06 - 75 x 60 x Ø600 mm .09 - 75 x 60 x Ø900 mm .11 - 75 x 60 x Ø1100 mm	
BA	Beam Angle	09 - OPAL 90°		09 - OPAL 90°	
		P8 - PRISMATIC 80°		P8 - PRISMATIC 80°	
CT	Colour Temperature	30. - 3000K		30. - 3000K	
		40. - 4000K		40. - 4000K	
FI	Finishing Options	■ .TB - Textured Black □ .TW - Textured White ■ .TS - Textured Silver ■ ■ ■ Other RAL colours available on request*		■ .TB - Textured Black □ .TW - Textured White ■ .TS - Textured Silver ■ ■ ■ Other RAL colours available on request*	

*Outras cores RAL disponíveis sob pedido / Autres RAL couleurs disponibles sur demande

----- ORDER CODE CONFIGURATION -----


CONFIGURAÇÃO DO CÓDIGO DE PEDIDO / CONFIGURATION DU CODE DE COMMANDE

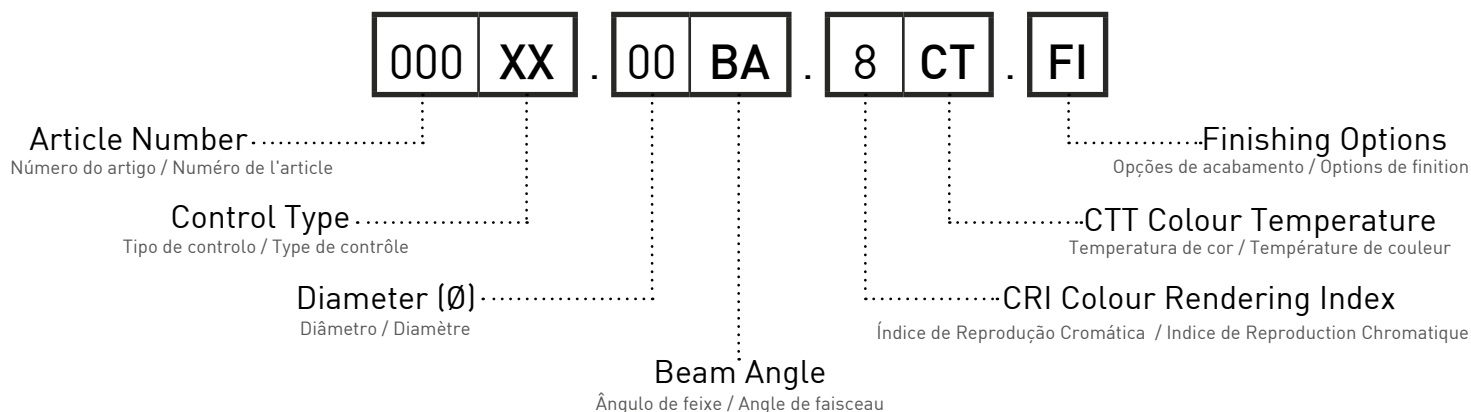

Code example for Suspended Olympia Ø620 OPAL, 3000K, ON/OFF in Textured Black: 180NF.6209.830.TB

Exemplo de código para Olympia suspenso Ø620 OPAL, 3000K, ON/OFF em preto texturizado: 180NF.6209.830.TB


Exemple de code pour Olympia suspendu Ø620 OPAL, 3000K, ON/OFF en noir texturé: 180NF.6209.830.TB

Ceiling Cup						
Type of Application	Ceiling Cup Recessed		Ceiling Cup Surface		Ceiling Cup Surface + Fastening	
Article Code	5004-023. CB.FI		5004-024. CB.FI		5004-025. CB.FI	
Control Type	ON/OFF	Dimming Control	ON/OFF	Dimming Control	ON/OFF	Dimming Control
CB Connection Type	3C	5C	3C	5C	3C	5C
FI Finishing Options	☒ .TB - Textured Black ☐ .TW - Textured White ☐ .TS - Textured Silver Other RAL colours available on request*		☒ .TB - Textured Black ☐ .TW - Textured White ☐ .TS - Textured Silver Other RAL colours available on request*		☒ .TB - Textured Black ☐ .TW - Textured White ☐ .TS - Textured Silver Other RAL colours available on request*	

*Outras cores RAL disponíveis sob pedido / Autres RAL couleurs disponibles sur demande

-----CEILING CUP CODE CONFIGURATION-----

CONFIGURAÇÃO DO CÓDIGO DA CAIXA DE ALIMENTAÇÃO / CONFIGURATION DU CODE DE LE PATÈRE DE SUSPENSION

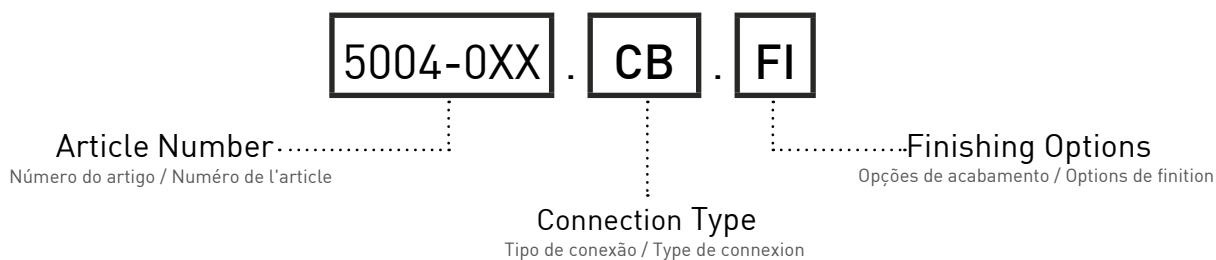

Code example for Suspended Olympia Ø620 OPAL, 3000K, ON/OFF in Textured Black with Ceiling Cup Recessed ON/OFF in Textured Black: 180NF.6209.830.TB + 5004-022.3C.TB
Exemplo de código para Olympia suspenso Ø620 OPAL, 3000K, ON/OFF em preto texturizado com Caixa de Alimentação em preto texturizado: 180NF.6209.830.TB + 5004-022.3C.TB
Exemple de code pour Olympia suspendu Ø620 OPAL, 3000K, ON/OFF en noir texturé avec patère de suspension texturée noire: 180NF.6209.830.TB + 5004-022.3C.TB











SHOWN IN REAL SIZE

MOSTRADO EM TAMANHO REAL / MONTRÉ EN TAILLE RÉELLE

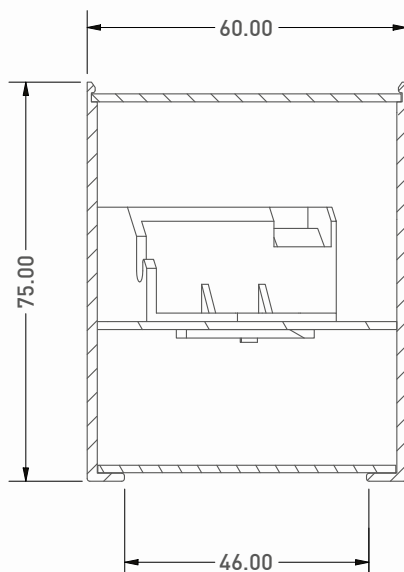


- **Internal driver**
Driver interno
Driver interne
- **High powered LED PCB's**
PCBs de LED de alta potência
PCBs LED haute puissance
- **Seamless lines with no screws**
Linhas sem emendas e sem parafusos
Lignes sans soudure et sans vis

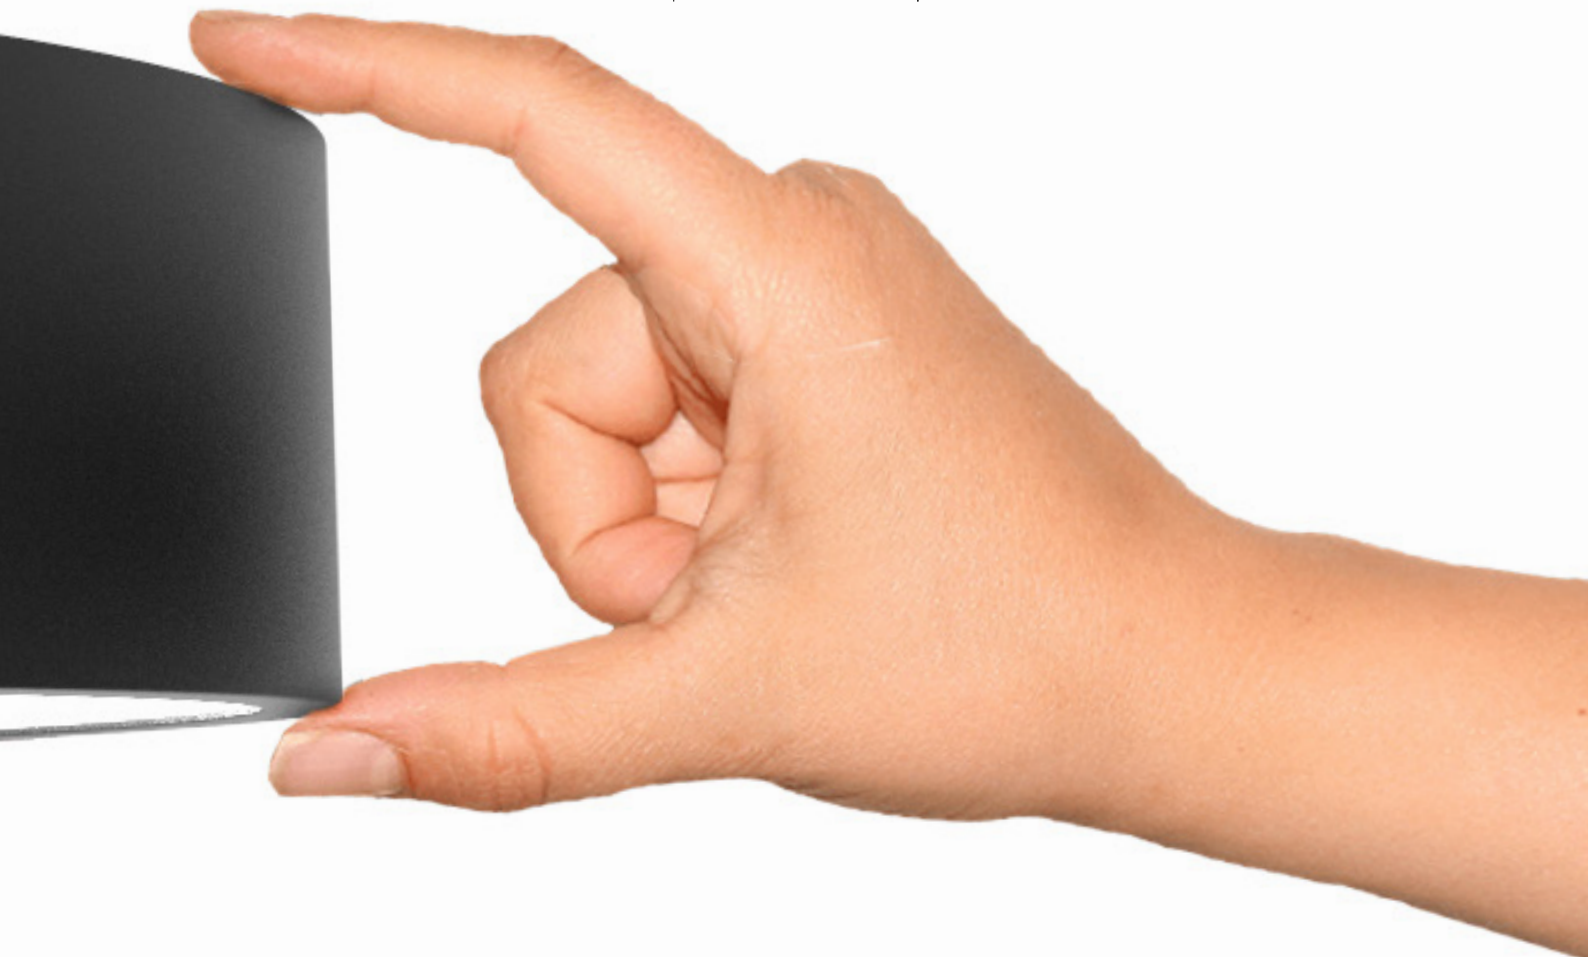

OLYMPIA


THE SERIES

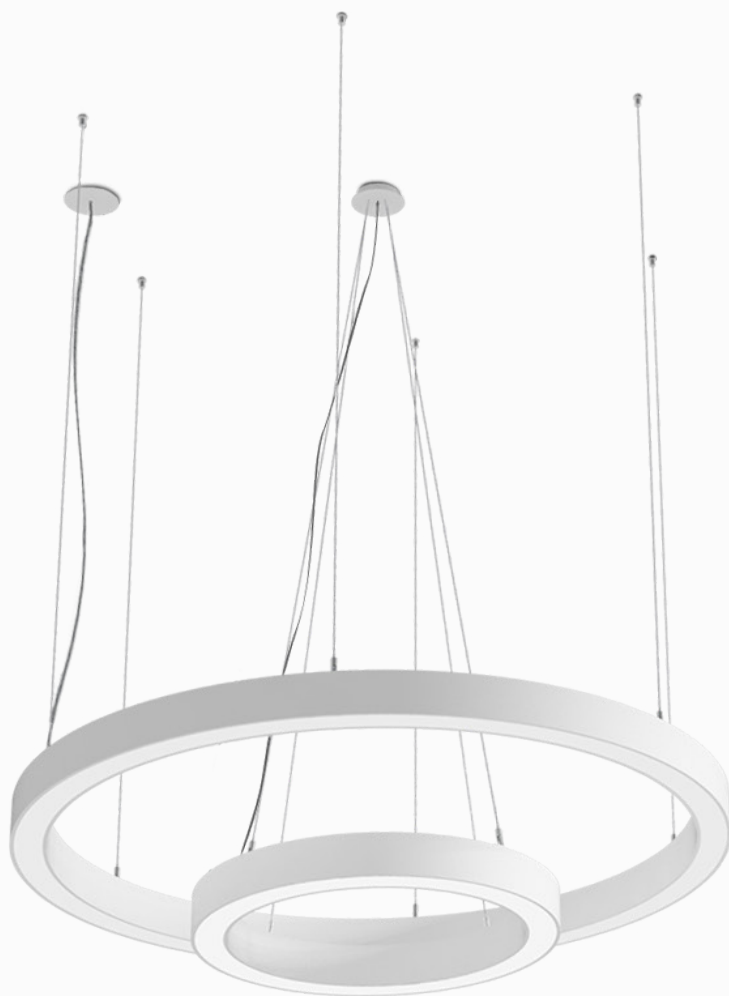


TYPE OF APPLICATION*




Surface Mounted
Montagem Saliente
Montage Surface



Suspended
Recessed Ceiling Cup
Suspensa - Caixa de Aliment. Encastrável
Suspendu - Boîtier d'Alimentation encastré




Suspended
Surface Ceiling Cup
Suspensa - Caixa de Aliment. Saliente
Suspendu - Boîtier d'Alimentation Saillie



Suspended
Surface Ceiling Cup + Fastening
Suspensa - Caixa de Aliment. + Fixação
Suspendu - Boîtier d'Alimentation Saillie
Regroupant les Câbles de Suspension

* TIPO DE APLICAÇÃO / TYPE D'APPLICATION

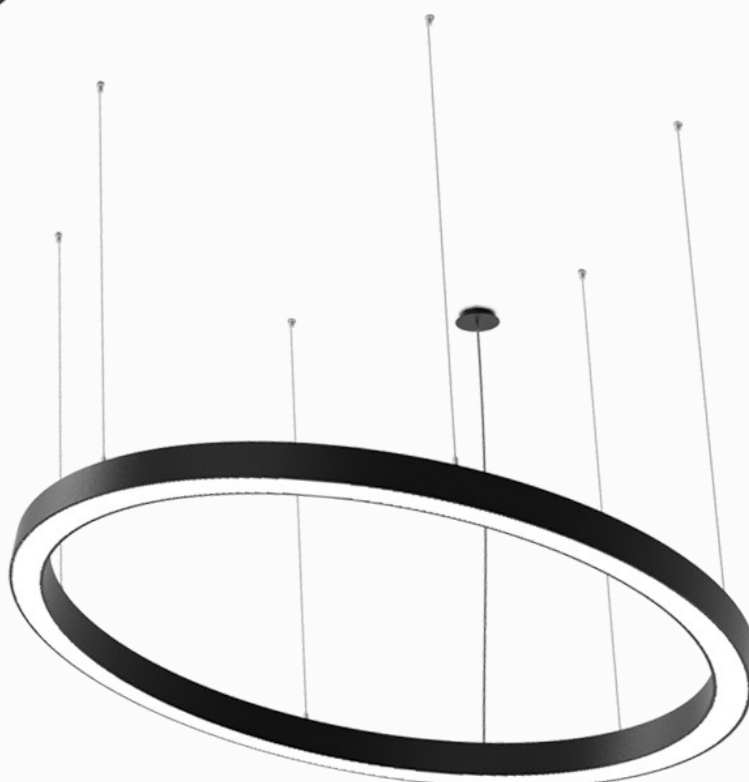


AVAILABLE
SIZES*




Ø 620 mm



Ø 920 mm




Ø 1220 mm





Ø 1520 mm

* TAMANHOS DISPONÍVEIS / TAILLES DISPONIBLES

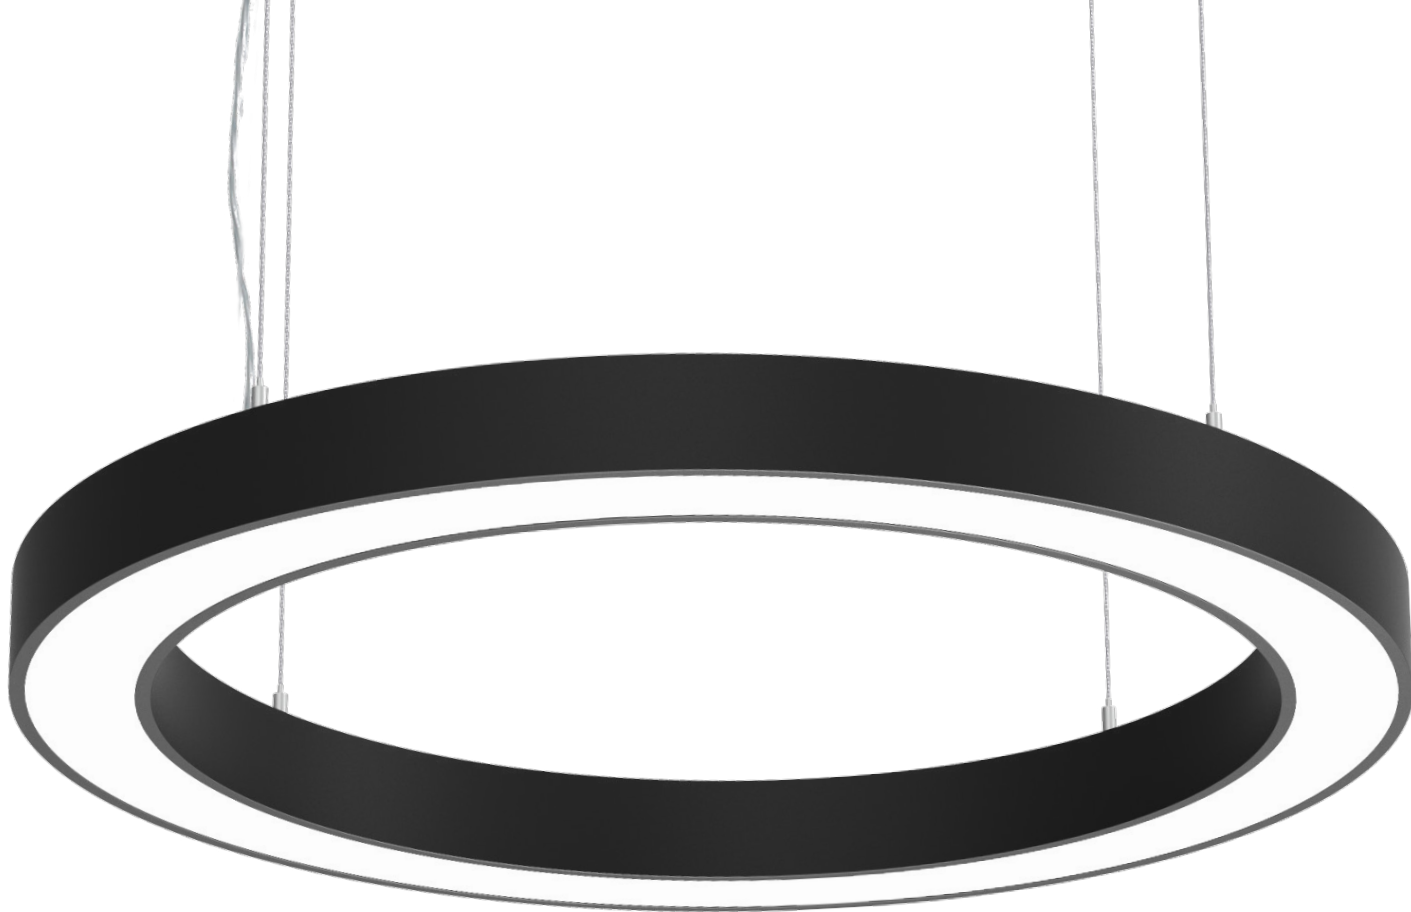

Olympia

Suspended

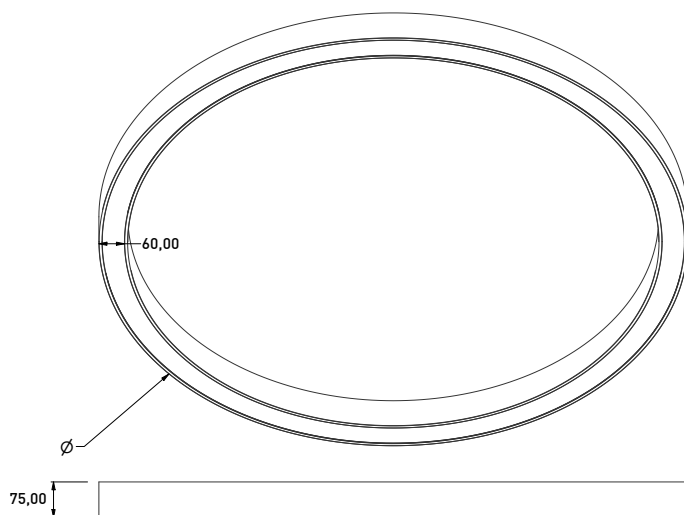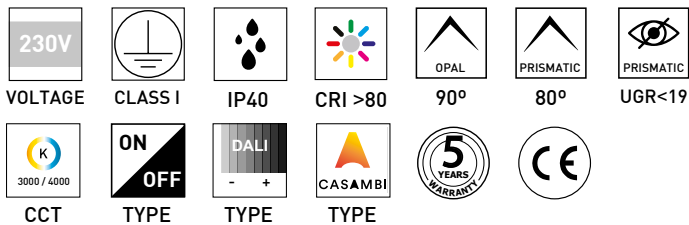

ORDERING OPTIONS

OPÇÕES DE ENCOMENDA / OPTIONS DE COMMANDE

ON REQUEST: Dimmable options

SOB PEDIDO: Opções dimáveis

SUR DEMANDE: Options gradables




POWER	DIAMETER (Ø)	LED LUMENS	LUMINAIRE LUMENS	ORDER CODE
41,0 W	Ø620 mm	7800 Lm	6552 Lm	180XX.06BA.8CT.TB
61,6 W	Ø920 mm	11700 Lm	9723 Lm	180XX.09BA.8CT.TB
82,1 W	Ø1220 mm	15600 Lm	12948 Lm	180XX.12BA.8CT.TB
109,4 W	Ø1520 mm	20800 Lm	17326 Lm	180XX.15BA.8CT.TB

THE LUMENS DISPLAYED ARE THE MAXIMUM VALUE THAT THE LUMINAIRE CAN ACHIEVE AT 4000K WITH A OPAL DIFFUSER.



OS LÚMENS EXIBIDOS SÃO O VALOR MÁXIMO QUE A LUMINÁRIA PODE ATINGIR A 4000K COM UM DIFUSOR OPAL.

LES LUMENS AFFICHÉS SONT LA VALEUR MAXIMALE QUE LE LUMINAIRE PEUT ATTEINDRE À 4000K AVEC UN DIFFUSEUR OPAL.

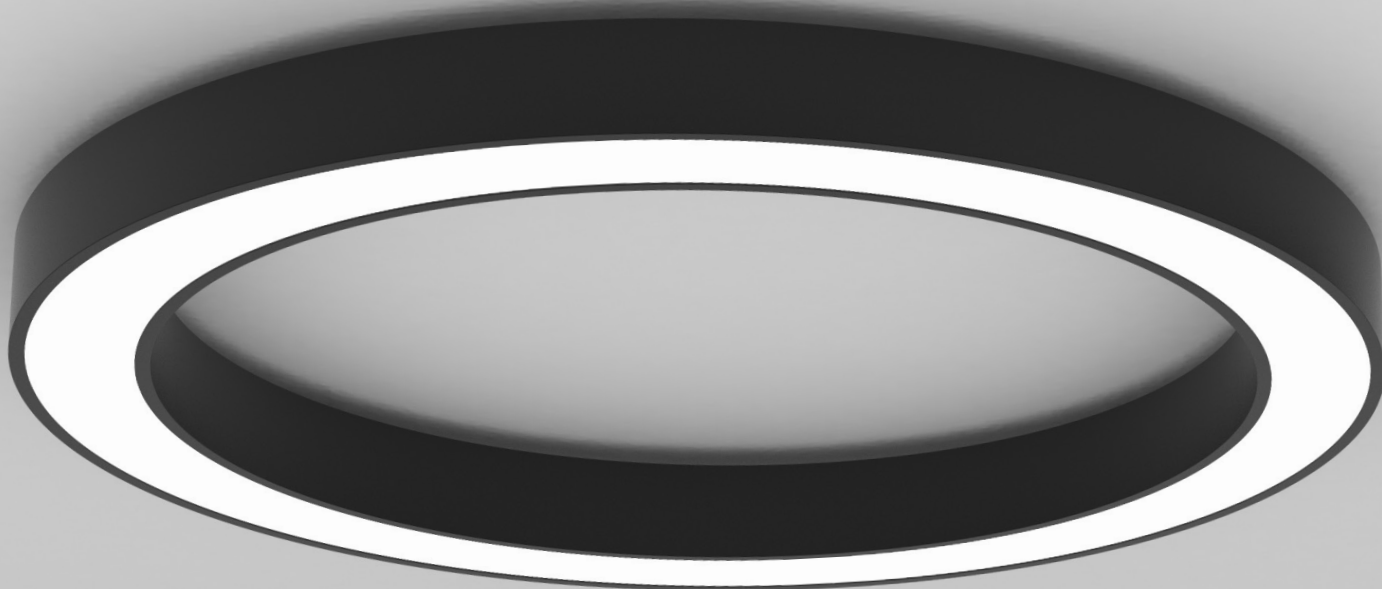

Olympia

Surface

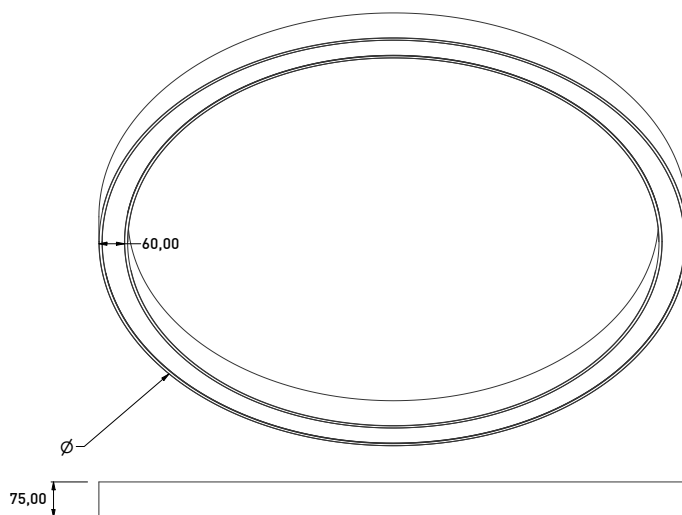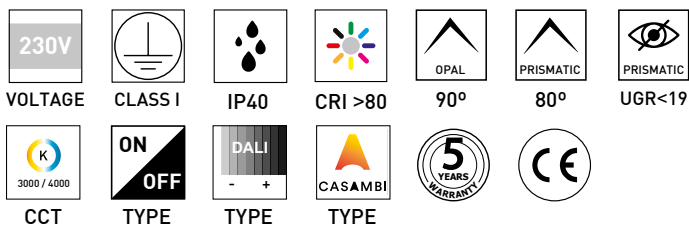

ORDERING OPTIONS

OPÇÕES DE ENCOMENDA / OPTIONS DE COMMANDE

ON REQUEST: Dimmable options

SOB PEDIDO: Opções dimáveis
SUR DEMANDE: Options gradables




POWER	DIAMETER (Ø)	LED LUMENS	LUMINAIRE LUMENS	ORDER CODE
41,0 W	Ø620 mm	7800 Lm	6552 Lm	181XX.06BA.8CT.TB
61,6 W	Ø920 mm	11700 Lm	9723 Lm	181XX.09BA.8CT.TB
82,1 W	Ø1220 mm	15600 Lm	12948 Lm	181XX.12BA.8CT.TB
109,4 W	Ø1520 mm	20800 Lm	17326 Lm	181XX.15BA.8CT.TB

THE LUMENS DISPLAYED ARE THE MAXIMUM VALUE THAT THE LUMINAIRE CAN ACHIEVE AT 4000K WITH A OPAL DIFFUSER.



OS LÚMENS EXIBIDOS SÃO O VALOR MÁXIMO QUE A LUMINÁRIA PODE ATINGIR A 4000K COM UM DIFUSOR OPAL.

LES LUMENS AFFICHÉS SONT LA VALEUR MAXIMALE QUE LE LUMINAIRE PEUT ATTEINDRE À 4000K AVEC UN DIFFUSEUR OPAL.

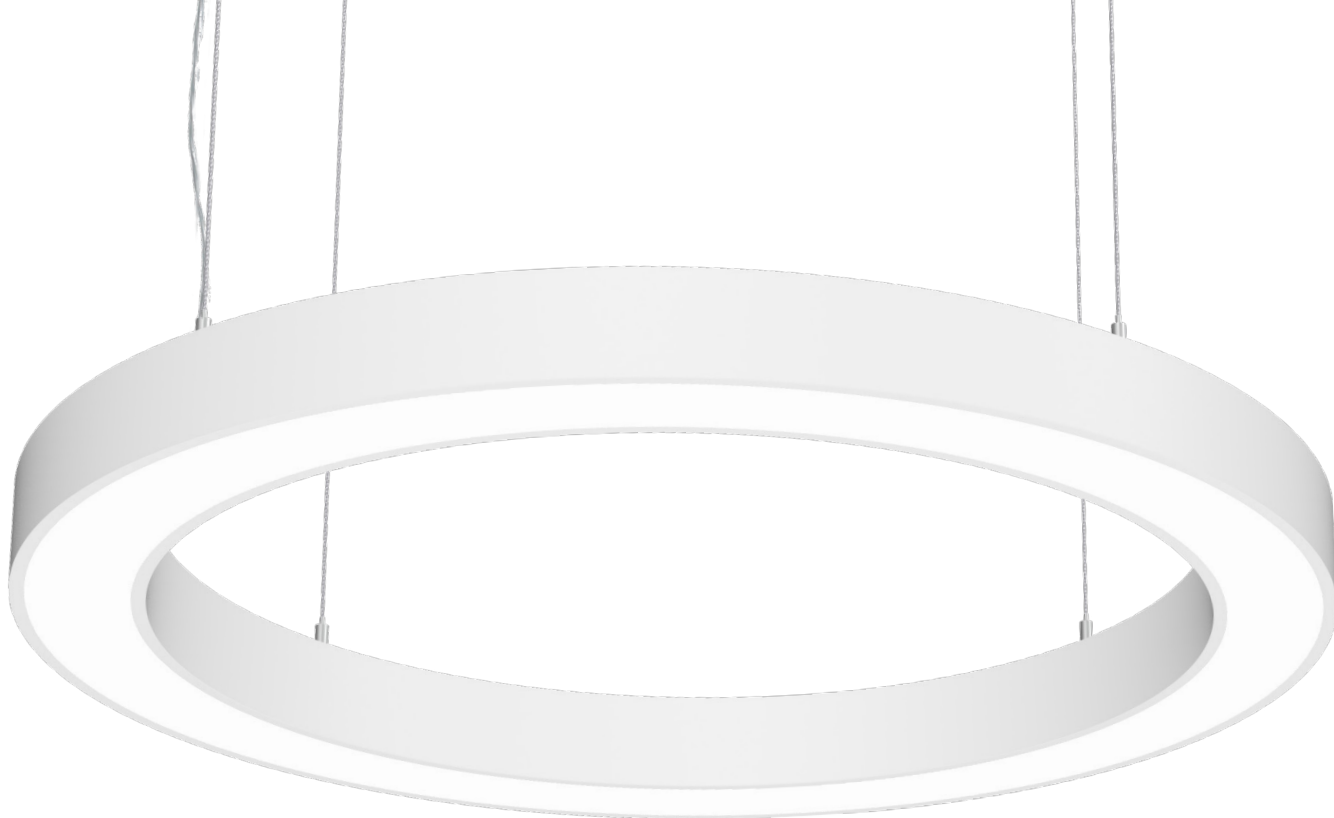

Olympia

Suspended

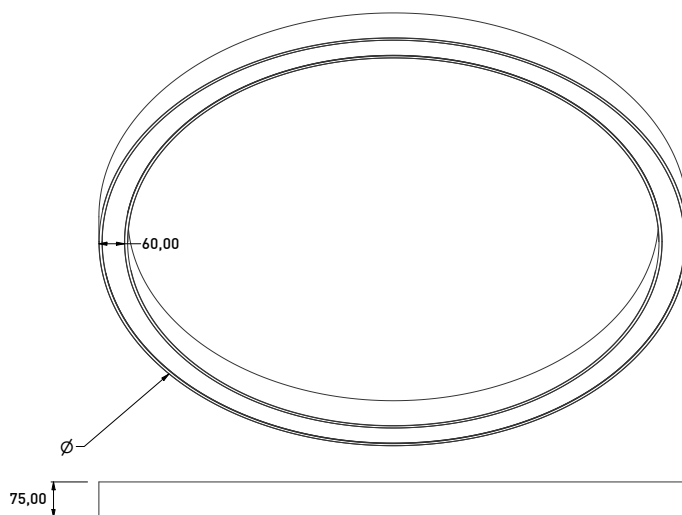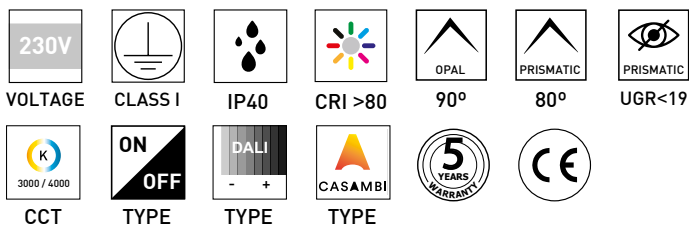

ORDERING OPTIONS

OPÇÕES DE ENCOMENDA / OPTIONS DE COMMANDE

ON REQUEST: Dimmable options

SOB PEDIDO: Opções dimáveis

SUR DEMANDE: Options gradables



POWER	DIAMETER (Ø)	LED LUMENS	LUMINAIRE LUMENS	ORDER CODE
41,0 W	Ø620 mm	7800 Lm	7278 Lm	180XX.06BA.8CT.TW
61,6 W	Ø920 mm	11700 Lm	10730 Lm	180XX.09BA.8CT.TW
82,1 W	Ø1220 mm	15600 Lm	14333 Lm	180XX.12BA.8CT.TW
109,4 W	Ø1520 mm	20800 Lm	19345 Lm	180XX.15BA.8CT.TW

THE LUMENS DISPLAYED ARE THE MAXIMUM VALUE THAT THE LUMINAIRE CAN ACHIEVE AT 4000K WITH A PRISMATIC DIFFUSER.



OS LÚMENS EXIBIDOS SÃO O VALOR MÁXIMO QUE A LUMINÁRIA PODE ATINGIR A 4000K COM UM DIFUSOR PRISMATIC.

LES LUMENS AFFICHÉS SONT LA VALEUR MAXIMALE QUE LE LUMINAIRE PEUT ATTEINDRE À 4000K AVEC UN DIFFUSEUR PRISMATIC.



Olympia

Surface

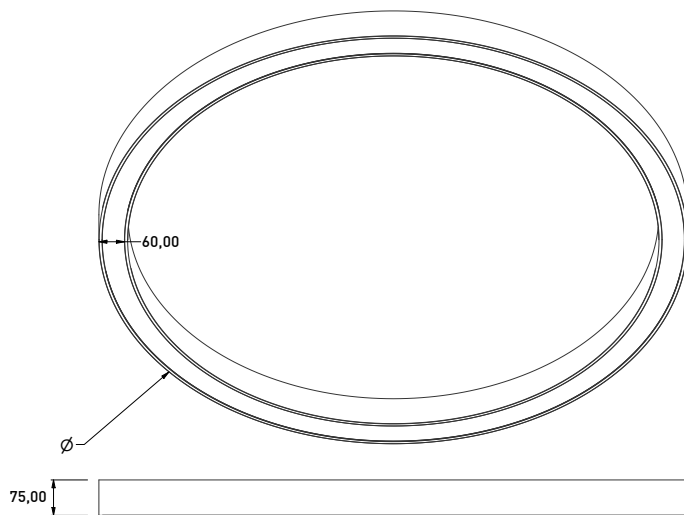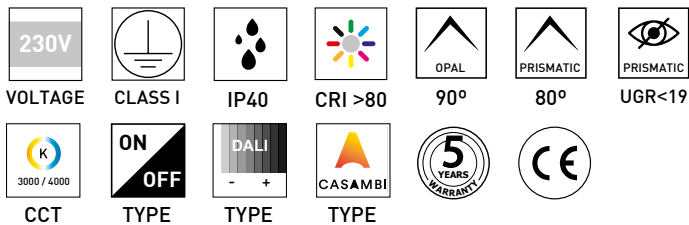

ORDERING OPTIONS

OPÇÕES DE ENCOMENDA / OPTIONS DE COMMANDE

ON REQUEST: Dimmable options

SOB PEDIDO: Opções dimáveis
SUR DEMANDE: Options gradables



POWER	DIAMETER (Ø)	LED LUMENS	LUMINAIRE LUMENS	ORDER CODE
41,0 W	Ø620 mm	7800 Lm	7278 Lm	181XX.06BA.8CT.TW
61,6 W	Ø920 mm	11700 Lm	10730 Lm	181XX.09BA.8CT.TW
82,1 W	Ø1220 mm	15600 Lm	14333 Lm	181XX.12BA.8CT.TW
109,4 W	Ø1520 mm	20800 Lm	19345 Lm	181XX.15BA.8CT.TW

THE LUMENS DISPLAYED ARE THE MAXIMUM VALUE THAT THE LUMINAIRE CAN ACHIEVE AT 4000K WITH A PRISMATIC DIFFUSER.

OS LÚMENS EXIBIDOS SÃO O VALOR MÁXIMO QUE A LUMINÁRIA PODE ATINGIR A 4000K COM UM DIFUSOR PRISMATIC.


LES LUMENS AFFICHÉS SONT LA VALEUR MAXIMALE QUE LE LUMINAIRE PEUT ATTEINDRE À 4000K AVEC UN DIFFUSEUR PRISMATIC.





HELIUS


THE SERIES

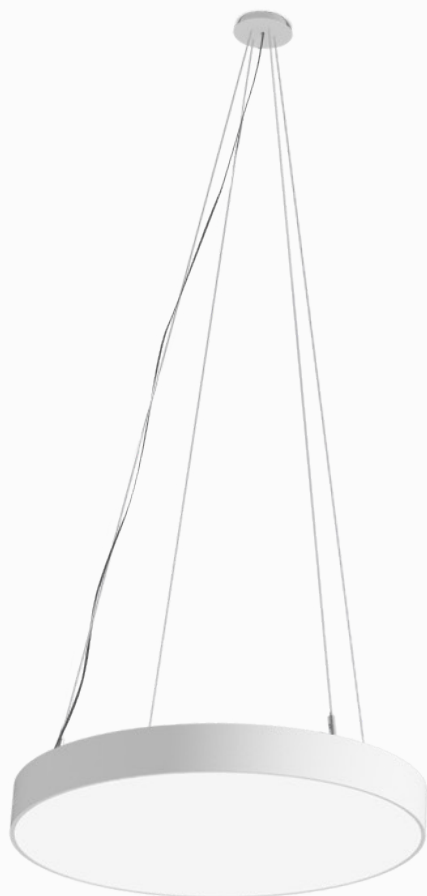


TYPE OF APPLICATION*




Surface Mounted
Montagem Saliente
Montage Surface



Suspended
Recessed Ceiling Cup
Suspensa - Caixa de Aliment. Encastrável
Suspendu - Boîtier d'Alimentation encastré




Suspended
Surface Ceiling Cup
Suspensa - Caixa de Aliment. Saliente
Suspendu - Boîtier d'Alimentation Saillie



Suspended
Surface Ceiling Cup + Fastening
Suspensa - Caixa de Aliment. + Fixação
Suspendu - Boîtier d'Alimentation Saillie
Regroupant les Câbles de Suspension

* TIPO DE APLICAÇÃO / TYPE D'APPLICATION

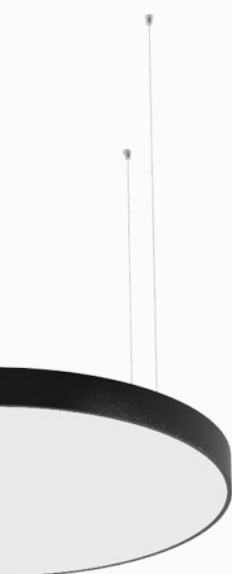

AVAILABLE
SIZES*




Ø 400 mm



Ø 600 mm



Ø 900 mm





Ø 1100 mm

* TAMANHOS DISPONÍVEIS / TAILLES DISPONIBLES



Helius

Suspended

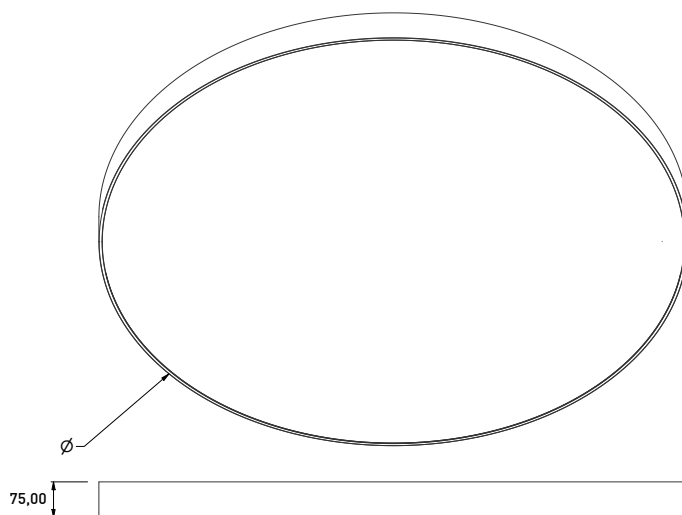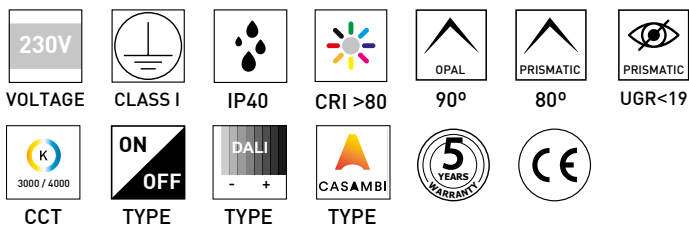

ORDERING OPTIONS

OPÇÕES DE ENCOMENDA / OPTIONS DE COMMANDE

ON REQUEST: Dimmable options

SOB PEDIDO: Opções dimáveis
SUR DEMANDE: Options gradables




POWER	DIAMETER (Ø)	LED LUMENS	LUMINAIRE LUMENS	ORDER CODE
17W	Ø400 mm	3200 lm	2717 lm	190XX.04BA.8CT.TB
28W	Ø600 mm	5400 lm	4601 lm	190XX.06BA.8CT.TB
56W	Ø900 mm	10880 lm	9128 lm	190XX.09BA.8CT.TB
102W	Ø1100 mm	19600 lm	16503 lm	190XX.11BA.8CT.TB

THE LUMENS DISPLAYED ARE THE MAXIMUM VALUE THAT THE LUMINAIRE CAN ACHIEVE AT 4000K WITH A OPAL DIFFUSER.



OS LÚMENS EXIBIDOS SÃO O VALOR MÁXIMO QUE A LUMINÁRIA PODE ATINGIR A 4000K COM UM DIFUSOR OPAL.

LES LUMENS AFFICHÉS SONT LA VALEUR MAXIMALE QUE LE LUMINAIRE PEUT ATTEINDRE À 4000K AVEC UN DIFFUSEUR OPAL.

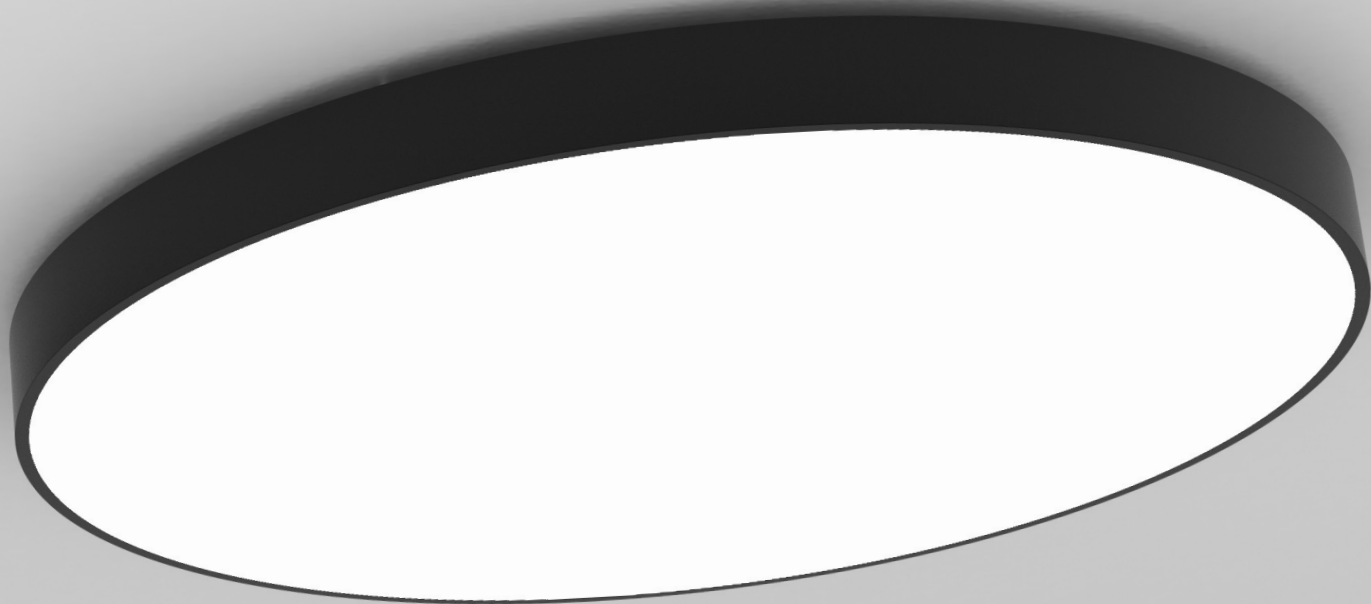

Helius

Surface

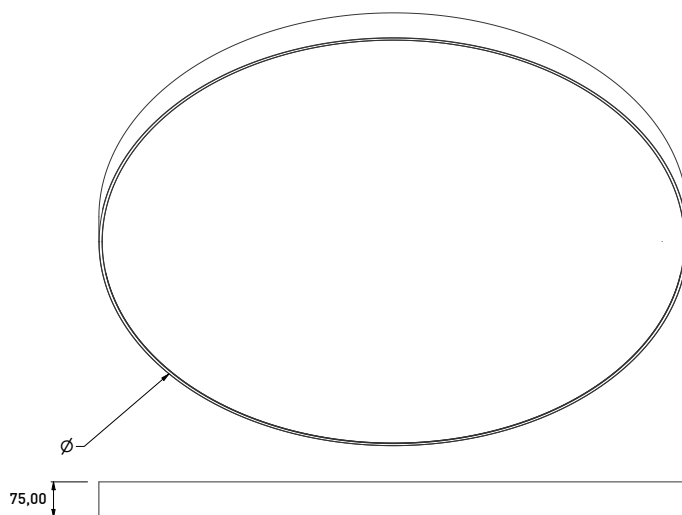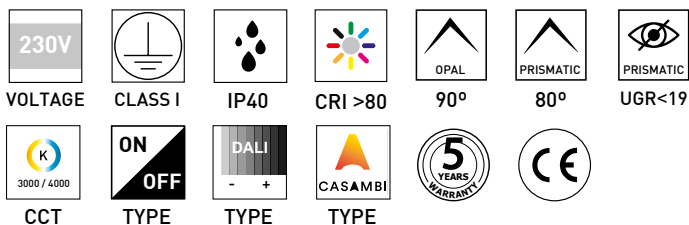

ORDERING OPTIONS

OPÇÕES DE ENCOMENDA / OPTIONS DE COMMANDE

ON REQUEST: Dimmable options

SOB PEDIDO: Opções dimáveis

SUR DEMANDE: Options gradables



POWER	DIAMETER (Ø)	LED LUMENS	LUMINAIRE LUMENS	ORDER CODE
17W	Ø400 mm	3200 lm	2717 lm	191XX.04BA.8CT.TB
28W	Ø600 mm	5400 lm	4601 lm	191XX.06BA.8CT.TB
56W	Ø900 mm	10880 lm	9128 lm	191XX.09BA.8CT.TB
102W	Ø1100 mm	19600 lm	16503 lm	191XX.11BA.8CT.TB

THE LUMENS DISPLAYED ARE THE MAXIMUM VALUE THAT THE LUMINAIRE CAN ACHIEVE AT 4000K WITH A OPAL DIFFUSER.



OS LÚMENS EXIBIDOS SÃO O VALOR MÁXIMO QUE A LUMINÁRIA PODE ATINGIR A 4000K COM UM DIFUSOR OPAL.

LES LUMENS AFFICHÉS SONT LA VALEUR MAXIMALE QUE LE LUMINAIRE PEUT ATTEINDRE À 4000K AVEC UN DIFFUSEUR OPAL.



Helius

Suspended

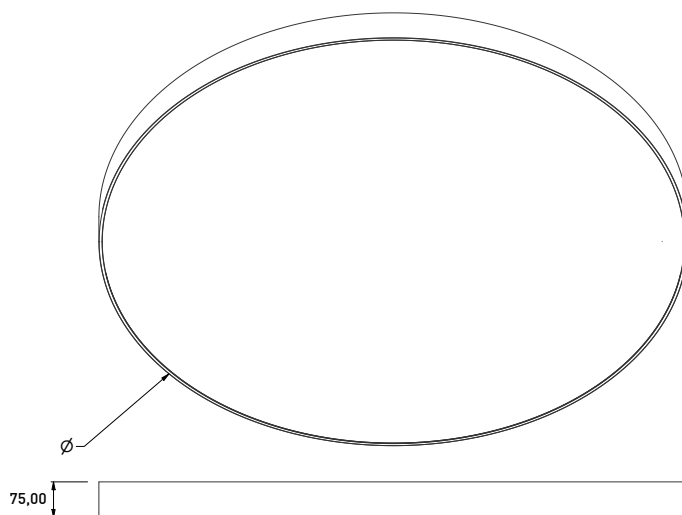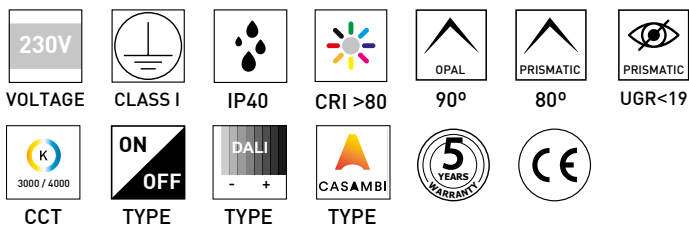

ORDERING OPTIONS

OPÇÕES DE ENCOMENDA / OPTIONS DE COMMANDE

ON REQUEST: Dimmable options

SOB PEDIDO: Opções dimáveis
SUR DEMANDE: Options gradables




POWER	DIAMETER (Ø)	LED LUMENS	LUMINAIRE LUMENS	ORDER CODE
17W	Ø400 mm	3200 lm	2749 lm	190XX.04BA.8CT.TW
28W	Ø600 mm	5400 lm	4632 lm	190XX.06BA.8CT.TW
56W	Ø900 mm	10880 lm	9284 lm	190XX.09BA.8CT.TW
102W	Ø1100 mm	19600 lm	16664 lm	190XX.11BA.8CT.TW

THE LUMENS DISPLAYED ARE THE MAXIMUM VALUE THAT THE LUMINAIRE CAN ACHIEVE AT 4000K WITH A PRISMATIC DIFFUSER.



OS LÚMENS EXIBIDOS SÃO O VALOR MÁXIMO QUE A LUMINÁRIA PODE ATINGIR A 4000K COM UM DIFUSOR PRISMATIC.

LES LUMENS AFFICHÉS SONT LA VALEUR MAXIMALE QUE LE LUMINAIRE PEUT ATTEINDRE À 4000K AVEC UN DIFFUSEUR PRISMATIC.

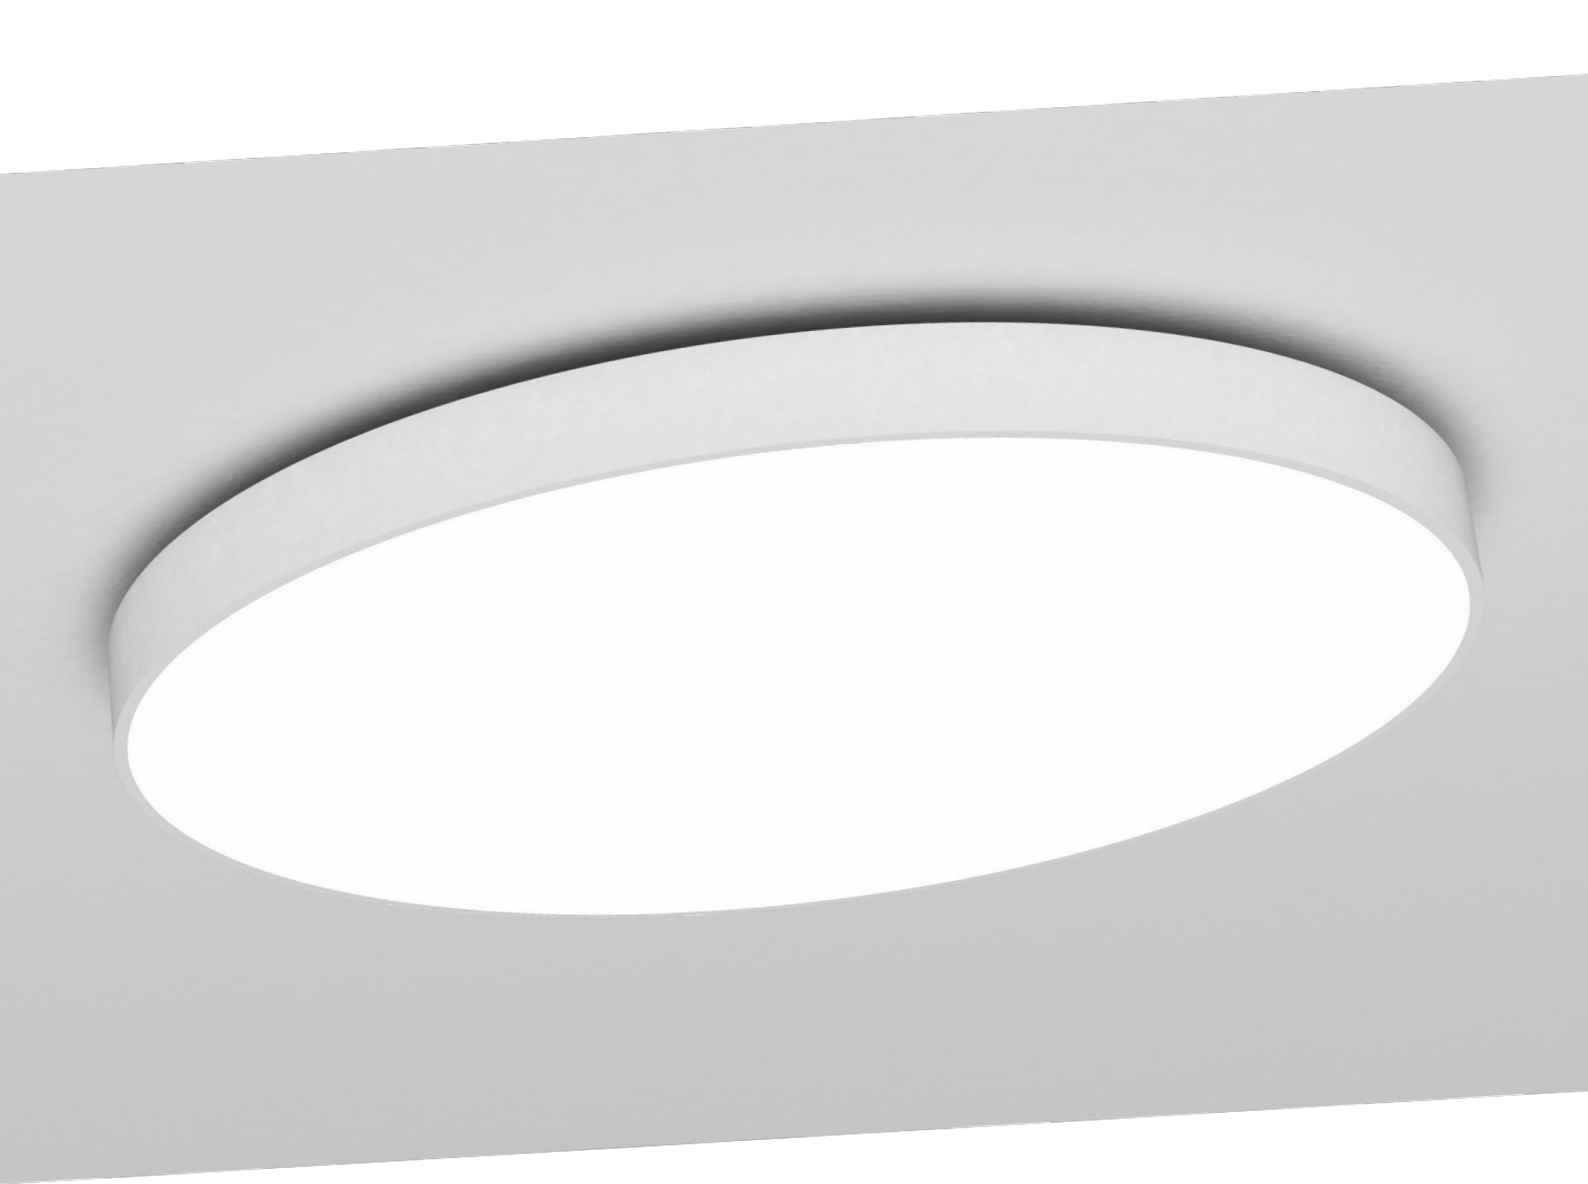

Helius

Surface

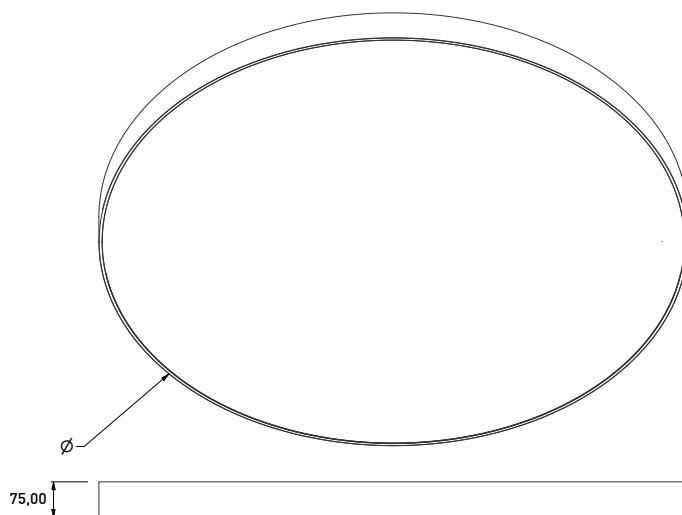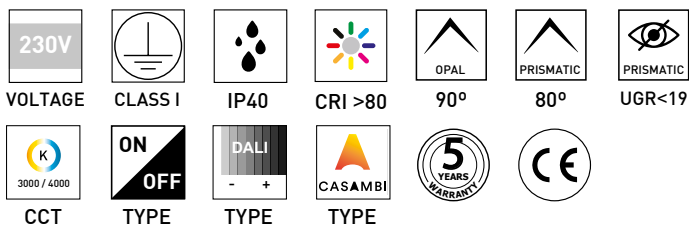

ORDERING OPTIONS

OPÇÕES DE ENCOMENDA / OPTIONS DE COMMANDE

ON REQUEST: Dimmable options

SOB PEDIDO: Opções dimáveis

SUR DEMANDE: Options gradables



POWER	DIAMETER (Ø)	LED LUMENS	LUMINAIRE LUMENS	ORDER CODE
17W	Ø400 mm	3200 lm	2749 lm	191XX.04BA.8CT.TW
28W	Ø600 mm	5400 lm	4632 lm	191XX.06BA.8CT.TW
56W	Ø900 mm	10880 lm	9284 lm	191XX.09BA.8CT.TW
102W	Ø1100 mm	19600 lm	16664 lm	191XX.11BA.8CT.TW

THE LUMENS DISPLAYED ARE THE MAXIMUM VALUE THAT THE LUMINAIRE CAN ACHIEVE AT 4000K WITH A PRISMATIC DIFFUSER.

OS LÚMENS EXIBIDOS SÃO O VALOR MÁXIMO QUE A LUMINÁRIA PODE ATINGIR A 4000K COM UM DIFUSOR PRISMATIC.

LES LUMENS AFFICHÉS SONT LA VALEUR MAXIMALE QUE LE LUMINAIRE PEUT ATTEINDRE À 4000K AVEC UN DIFFUSEUR PRISMATIC.





OLYMPIA & HELIUS

A full range of lighting solutions.
For more information visit us at

www.brilumen.com



brilumen®

OLYMPIA & HELIUS

LED LIGHT DESIGN

V.8.1 2020
OLYMPIA & HELIUS
RINGS OF EMOTIONS

Rua de Oliveira e Sá, nº200
ZI, Maia, Setor 1
4475-263 Maia
PORTUGAL