



## BRILUMEN DATA SHEET

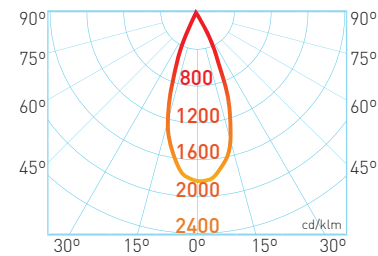

1m	Ø0,7m	1.446 lx
2m	Ø1,4m	362 lx
3m	Ø2,2m	161 lx
4m	Ø2,9m	90,4 lx
5m	Ø3,6m	57,9 lx
6m	Ø4,3m	40,1 lx

SINGLE CRYSTAL 36°

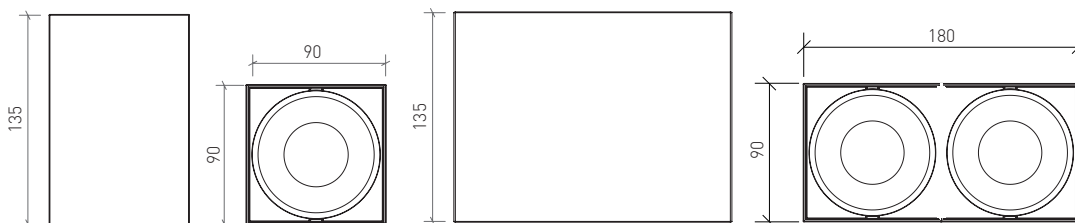

1m	Ø0,7m	2.892 lx
2m	Ø1,4m	724 lx
3m	Ø2,2m	322 lx
4m	Ø2,9m	180,8 lx
5m	Ø3,6m	115,8 lx
6m	Ø4,3m	80,2 lx

DOUBLE CRYSTAL 36°



## ORDER OPTIONS OPÇÕES DE ENCOMENDA

ON REQUEST: Dimmable options  
SOB PEDIDO: Opções dimáveis

PRODUCT NAME	PRODUCT CODE	POWER	BEAM ANGLE	CRI	CCT	LED LUMENS	LUMINAIRE LUMENS
CRYSTAL	333.90.36.30.FI	10W	36°	>90	3000K	870 lm	750 lm
	333.90.36.40.FI	10W	36°	>90	4000K	911 lm	786 lm
	333.90.60.30.FI	10W	60°	>90	3000K	870 lm	790 lm
	333.90.60.40.FI	10W	60°	>90	4000K	911 lm	825 lm
DOUBLE CRYSTAL CRYSTAL DUPLO	334.90.36.30.FI	20W	36°	>90	3000K	1706 lm	1472 lm
	334.90.36.40.FI	20W	36°	>90	4000K	1822 lm	1572 lm
	334.90.60.30.FI	20W	60°	>90	3000K	1706 lm	1546 lm
	334.90.60.40.FI	20W	60°	>90	4000K	1822 lm	1650 lm

### .FI

FINISHING OPTIONS  
OPÇÕES DE ACABAMENTO

Please change .FI by one of the following options.  
Por favor altere .FI por uma das seguintes opções.

1° suffix: RAL9003 RAL9017