


BRILUMEN DATA SHEET




CURRENT 500mA / 350mA
 CLASS III / CLASSE III
 IP54
 CRI >90
 36°/60°
 90*90 mm
 TYPE ON/OFF
 CE
 5 YEAR WARRANTY

ERIDANE
10W. 3000K . 36°

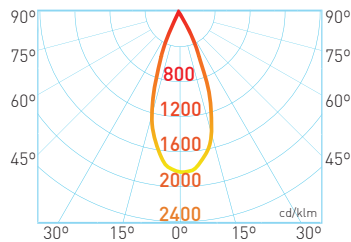


1m	Ø0,7m	1.404 lx
2m	Ø1,4m	351 lx
3m	Ø2,2m	156 lx
4m	Ø2,9m	87,8 lx
5m	Ø3,6m	56,2 lx
6m	Ø4,3m	38,9 lx

ERIDANE
13W. 3000K . 36°

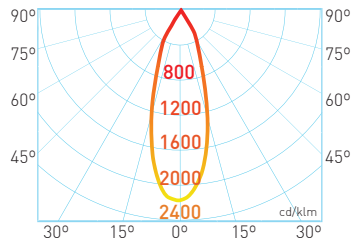

1m	Ø0,6m	2.636 lx
2m	Ø1,15m	659 lx
3m	Ø1,78m	293 lx
4m	Ø2,37m	165 lx
5m	Ø2,96m	105 lx
6m	Ø3,55m	73,2 lx

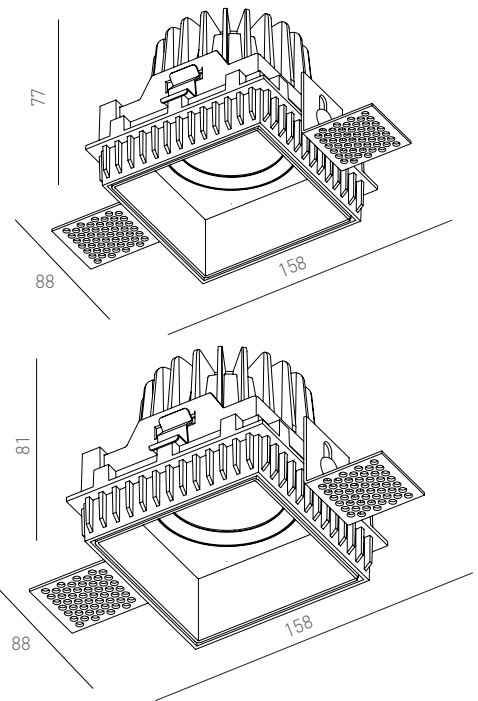

ORDER OPTIONS OPÇÕES DE ENCOMENDA

ON REQUEST: Dimmable options
 SOB PEDIDO: Opções dimáveis

PRODUCT CODE	POWER	BEAM ANGLE	CRI	CCT	LED LUMENS	LUMINAIRE LUMENS
326.90.36.30.TW	10W	36°	>90	3000K	870 lm	700 lm
326.90.36.40.TW	10W	36°	>90	4000K	911 lm	725 lm
326.90.60.30.TW	10W	60°	>90	3000K	870 lm	740 lm
326.90.60.40.TW	10W	60°	>90	4000K	911 lm	761 lm
339.90.36.30.TW	13W	36°	>90	3000K	1363 lm	1132 lm
339.90.36.40.TW	13W	36°	>90	4000K	1407 lm	1169 lm