

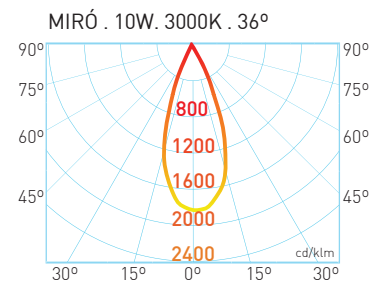
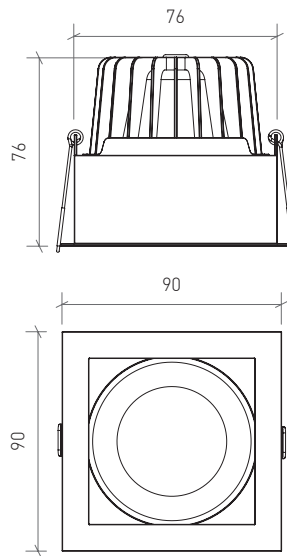


BRILUMEN DATA SHEET

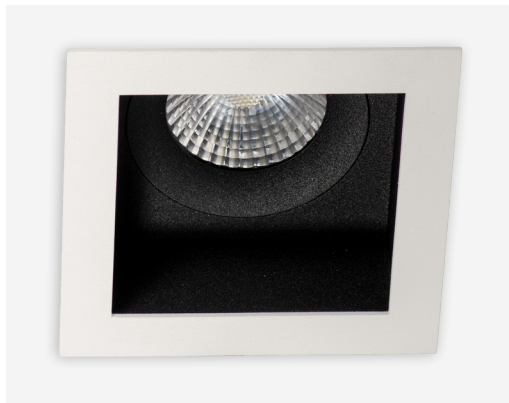

Distance (m)	Beam Diameter (Ø)	Illuminance (lx)
1	Ø0,7m	1.404 lx
2	Ø1,4m	351 lx
3	Ø2,2m	156 lx
4	Ø2,9m	87,8 lx
5	Ø3,6m	56,2 lx
6	Ø4,3m	38,9 lx

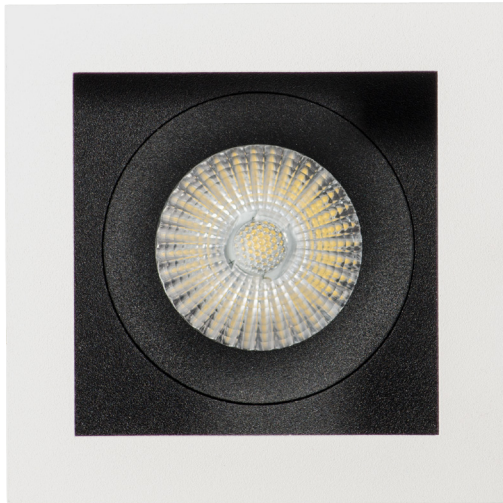

WATTAGE
POTÊNCIA



CURRENT
CORRENTE



CLASS III
CLASSE III



IP44



CRI > 90



36°/60°



82*82 mm



TYPE



ORDER OPTIONS OPÇÕES DE ENCOMENDA



ON REQUEST: Dimmable options
SOB PEDIDO: Opções dimáveis

PRODUCT CODE	POWER	BEAM ANGLE	CRI	CCT	LED LUMENS	LUMINAIRE LUMENS
328.90.36.30.FI	10W	36°	>90	3000K	870lm	700lm
328.90.36.40.FI	10W	36°	>90	4000K	911lm	725lm
328.90.60.30.FI	10W	60°	>90	3000K	870lm	740lm
328.90.60.40.FI	10W	60°	>90	4000K	911lm	761lm

.FI

FINISHING OPTIONS
OPÇÕES DE ACABAMENTO

Please change .FI by one of the following options.
Por favor altere .FI por uma das seguintes opções.

1° suffix: **TW** RAL9003

TB RAL9017

TWB Textured white exterior / Textured black interior
Exterior em branco texturado / Interior em preto texturado