

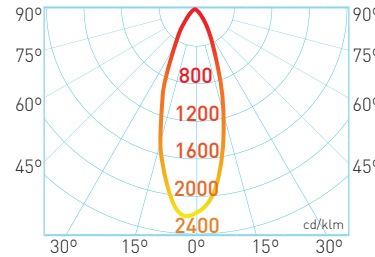
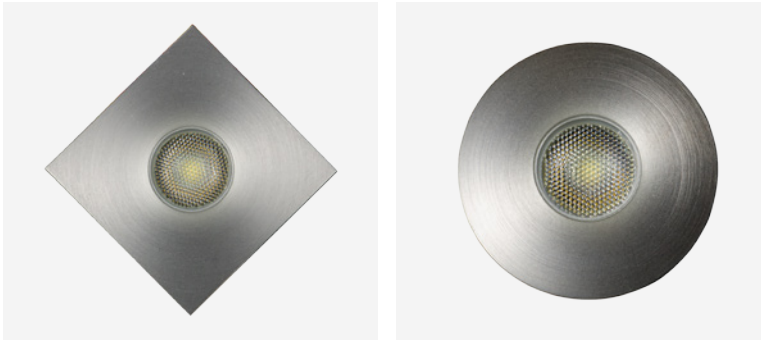


## BRILUMEN DATA SHEET

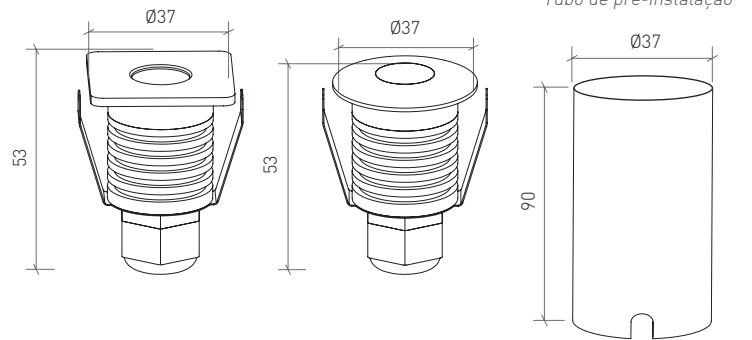

1m	Ø0,60m	339 lx
2m	Ø1,20m	84,8 lx
3m	Ø1,81m	37,7 lx
4m	Ø2,42m	21,2 lx
5m	Ø3,02m	13,6 lx
6m	Ø3,63m	9,41 lx

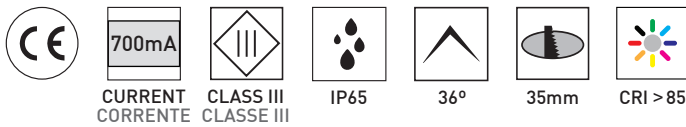

Pre-installation tube  
Tubo de pré-instalação

## ORDER OPTIONS OPÇÕES DE ENCOMENDA

PRODUCT CODE	TYPE	POWER	CRI	BEAM ANGLE	CCT	LED LUMENS	LUMINAIRE LUMENS
603.85.36.30.BS	ROUND	2W	>85	36°	3000K	180lm	158lm
603.85.36.40.BS		2W	>85	36°	4000K	198lm	174lm
602.85.36.30.BS	SQUARE	2W	>85	36°	3000K	180lm	158lm
602.85.36.40.BS		2W	>85	36°	4000K	198lm	174lm

## ACCESSORIES OPTIONS OPÇÕES DE ACESSÓRIOS

PRODUCT CODE	POWER
SFSLT3-700ISC	Driver for Orion 1 piece, 700mA, IP65 Driver para Orion 1 unidade, 700mA, IP65
8015-0221	Driver for Orion 2-5 pieces, 700mA Driver para Orion 2-5 unidades, 700mA
4080-1030	Waterproof box 81x83x55mm: 1 cable gland input of 4,8mm and 5 outputs Caixa estanque 81x83x55mm: 1 bucim de entrada de 4,8mm e 5 saídas
4080-1031	Output cable gland for waterproof box Bucim de saída p/ caixa estanque
4080-1033	Cover for waterproof box Tampa p/ caixa estanque

