


BRILUMEN DATA SHEET



| | | | | | | | | | | | |
|---------------------|---------------------|-------------------------|------|----------|-----|-----|------|-------|------|--|--|
| | | | | | | | | | | | |
| WATTAGE POTÊNCIA | CURRENT CORRENTE | CLASS III CLASSE III | IP40 | CRI > 90 | 36° | 90° | 355° | Ø92mm | TYPE | | |

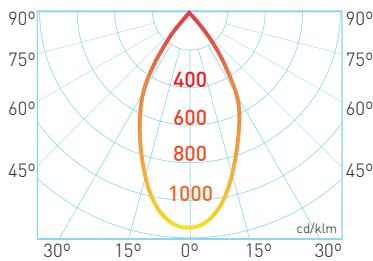

| | | |
|------|--------|---------|
| 1,5m | Ø1,57m | 717 lx |
| 3m | Ø3,13m | 179 lx |
| 4,5m | Ø4,69m | 79,7 lx |
| 6m | Ø6,26m | 44,8 lx |
| 7,5m | Ø7,82m | 28,7 lx |
| 9m | Ø9,39m | 19,9 lx |

ORDER OPTIONS OPÇÕES DE ENCOMENDA

| PRODUCT CODE | POWER | BEAM ANGLE | CRI | CCT | LED LUMENS | LUMINAIRE LUMENS |
|-----------------|-------|------------|-----|-------|------------|------------------|
| 444.90.36.30.TW | 13W | 36° | >90 | 3000K | 1432lm | 1269 lm |
| 444.90.36.30.TB | 13W | 36° | >90 | 3000K | 1432lm | 1269 lm |

ON REQUEST: Dimmable options
SOB PEDIDO: Opções dimáveis

