

DESCRIPTION


A circle is the reflection of eternity, it has no beginning and it has no end. Brilumen proudly presents our new range of circular LED luminaires. With a 5 Year Warranty Helius is designed and inspired to deliver one complete ambient light with a seamless diffuser and profile. With an internal driver, different wattages, diameters and mounting types, these circular profiles can be easily applied in numerous locations, such as stores, cinemas, museums, galleries, hotels, restaurants, meeting rooms, offices, lounges, etc. The Olympia LED circular profile can also be configured with the options of ON-OFF, DALI and CASAMBI. Other dimmable options are as well available on request. Brilumen has also available the IES and LDT files for DIALux projects, providing technical assistance during lighting projects.

MOUNTING TYPE	Suspension
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50/60 Hz, 220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured Silver, Textured White
CONTROL	DALI, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 194 lm/W
CRI	CRI→80
LIFESPAN	40.000 Hours Tp 55°
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/F10
PHOTOBIOLOGICAL RISK	R60

ICONOGRAFIA

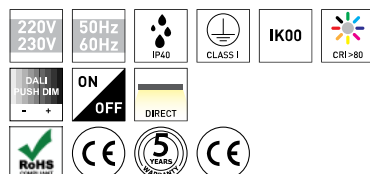

TECHNICAL DRAWING



HELIUS SUSPENDED
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - OPAL

DIMENSION	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	UGR	LED LUMENS	LUMINAIRE LM	CODE
400	17	TB, TS, TW	3000K, 4000K	DA, NF		3200	2717	190XX.0409.CT.FI
600	29	TB, TS, TW	3000K, 4000K	DA, NF		5400	4601	190XX.0609.CT.FI
900	57	TB, TS, TW	3000K, 4000K	DA, NF		10880	9129	190XX.0909.CT.FI
1100	102	TB, TS, TW	3000K, 4000K	DA, NF		19600	16504	190XX.1109.CT.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX
DALI	DA
ON/OFF	NF

COLOR TEMP.	CT
3000K	30
4000K	40

FINISHING	FI
Textured Black	TB
Textured Silver	TS
Textured White	TW



HELIUS SUSPENDED
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - PRISMATIC

DIMENSION	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	UGR	LED LUMENS	LUMINAIRE LM	CODE
400	17	TB, TS, TW	3000K, 4000K	DA, NF		3200	2750	190XX.04P8.CT.FI
600	29	TB, TS, TW	3000K, 4000K	DA, NF		5400	4633	190XX.06P8.CT.FI
900	57	TB, TS, TW	3000K, 4000K	DA, NF		10880	9284	190XX.09P8.CT.FI
1100	102	TB, TS, TW	3000K, 4000K	DA, NF		19600	16664	190XX.11P8.CT.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX
DALI	DA
ON/OFF	NF

COLOR TEMP.	CT
3000K	30
4000K	40

FINISHING	FI
Textured Black	TB
Textured Silver	TS
Textured White	TW

ACCESSORIES

	Suspension Kit	3 m	1,5 m
	Silver	3080-0055.SL	3080-0044.SL
	White	3080-0055.WH	3080-0044.WH

	Power Cable Sec 0,75	Dim Control	ON/Off
	Power Cable 3G 0.75 3 m	80303005	
	Power Cable 3G 0.75 1,5 m	80303004	
	Power Cable 3G 1,5 m	80303001	
	Power Cable 3G 3 m	80303002	
	Power Cable 3G 5 m	80303003	80303006

	Ceiling Rose Recessed	120mm
	Textured Black	50041023.TB
	Textured Silver	50041023.TS
	Textured white	50041023.TW

	Ceiling Rose Surface+Fix	120mm
	Textured Black	50041024.TB
	Textured Silver	50041024.TS
	Textured white	50041024.TW

	Surface ceiling rose	120mm
	Silver	50041025.TS
	Textured Black	50041025.TB
	Textured white	50041025.TW