
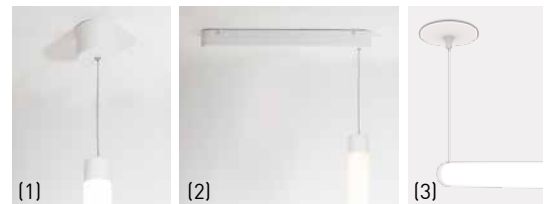
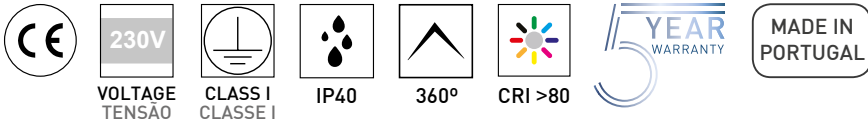
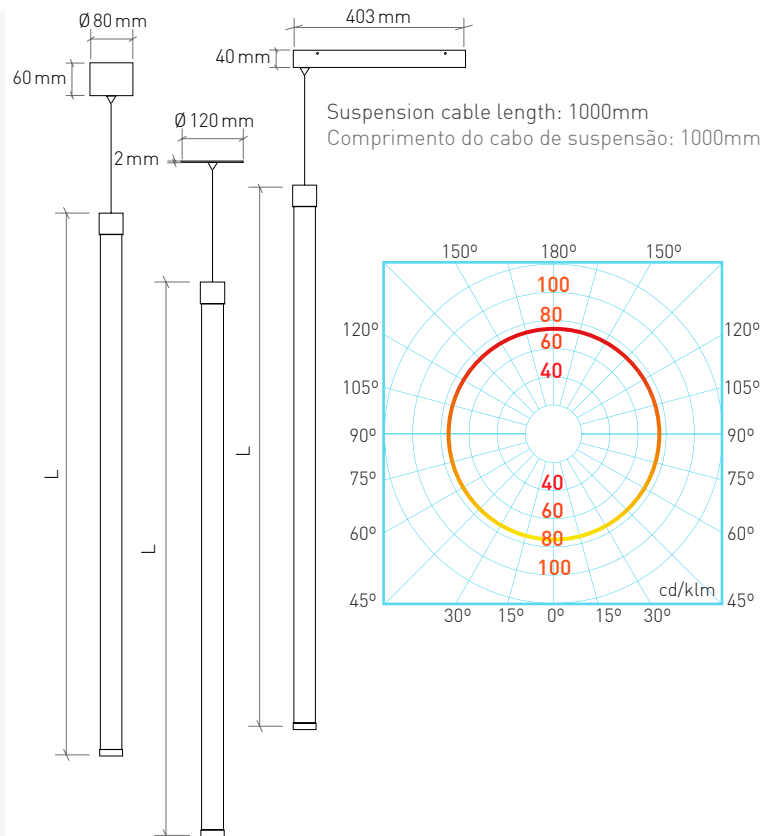


## BRILUMEN DATA SHEET

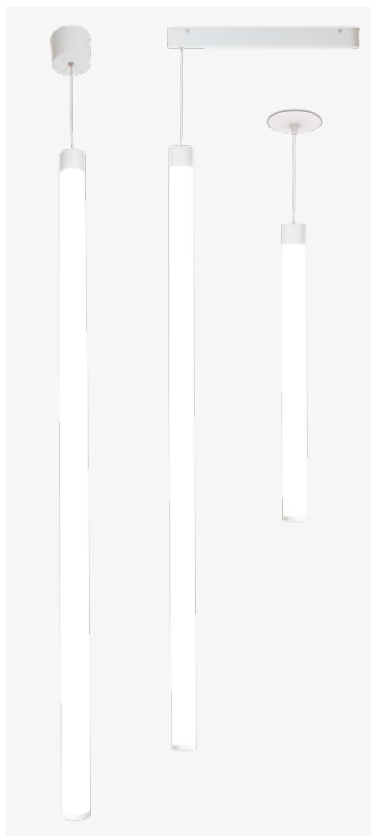

### ORDER OPTIONS OPÇÕES DE ENCOMENDA

Please, choose the mounting option according to the regulation type / length in the second table.  
Por favor, escolha a opção de montagem de acordo com o tipo de regulação / comprimento na segunda tabela.

PRODUCT CODE	TYPE	POWER	CRI	BEAM ANGLE	LENGTH (L)	CCT	LED LUMENS	LUMINAIRE LUMENS	LED EFFICACY
164V.80.360.06.30.TW	VERTICAL	16 W	>80	360°	653 mm	3000K	2925 lm	2413 lm	182 lm/W
164V.80.360.06.40.TW	VERTICAL	16 W	>80	360°	653 mm	4000K	3098 lm	2555 lm	193 lm/W
164V.80.360.09.30.TW	VERTICAL	24 W	>80	360°	952 mm	3000K	4388 lm	3620 lm	182 lm/W
164V.80.360.09.40.TW	VERTICAL	24 W	>80	360°	952 mm	4000K	4647 lm	3833 lm	193 lm/W
164V.80.360.12.30.TW	VERTICAL	32 W	>80	360°	1251 mm	3000K	5851 lm	4827 lm	182 lm/W
164V.80.360.12.40.TW	VERTICAL	32 W	>80	360°	1251 mm	4000K	6196 lm	5111 lm	193 lm/W

REGULATION TYPE	LENGTH	ROUND SURFACE SALIENTE REDONDO (1)	RECTANGULAR SURFACE SALIENTE RETANGULAR (2)	ROUND RECESSED ENCASTRADO REDONDO (3)
ON/OFF	600 mm	5004-015.ON06	5004-016.ON06	5004-017.ON06
ON/OFF	900 mm	5004-015.ON09	5004-016.ON09	5004-017.ON09
ON/OFF	1200 mm	5004-015.ON12	5004-016.ON12	5004-017.ON12
DALI	600 mm	N/A	5004-016.DA06	5004-017.DA06
DALI	900 mm	N/A	5004-016.DA09	5004-017.DA09
DALI	1200 mm	N/A	5004-016.DA12	5004-017.DA12