

BRILUMEN DATA SHEET

WATTAGE
POTÊNCIACURRENT
CORRENTECLASS III
CLASSE III

IP20



CRI > 90




35°



53 mm




TYPE

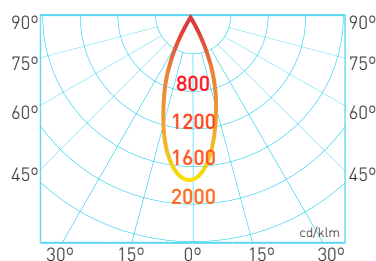

1,5m	Ø1,02m	590 lx
3m	Ø2,05m	148 lx
4,5m	Ø3,06m	65,6 lx
6m	Ø4,08m	36,9 lx
7,5m	Ø5,1m	23,6 lx
9m	Ø6,13m	16,4 lx

LAZULI 7W 35° 4000K

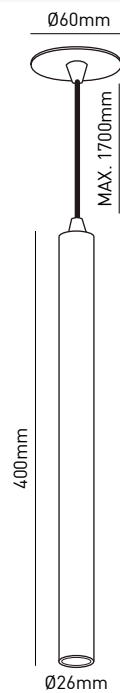ORDER OPTIONS
OPÇÕES DE ENCOMENDAON REQUEST: Dimmable options
SOB PEDIDO: Opções dimáveis

PRODUCT CODE	POWER	BEAM ANGLE	CRI	CCT	LED LUMENS	LUMINAIRE LUMENS	LED EFFICACY
406.90.35.30.TB	7W	35°	> 90	3000K	735 lm	660 lm	105 lm/W



Bluetooth DALI driver (wireless dimming):
add "DW" after the first 3 digits. Ex: 406DW.90.35.30.TB
Driver Bluetooth DALI (dimming wireless): acrescente "DW"
a seguir aos primeiros dígitos. Ex: 406DW.90.35.30.TB



DALI & Switching dimming (digital dimming): add "DA"
after the first 3 digits. Ex: 406DA.90.35.30.TB
DALI e Switching dimming (dimming digital): acrescente "DA"
a seguir aos primeiros dígitos. Ex: 406DA.90.35.30.TB