



BRILUMEN DATA SHEET

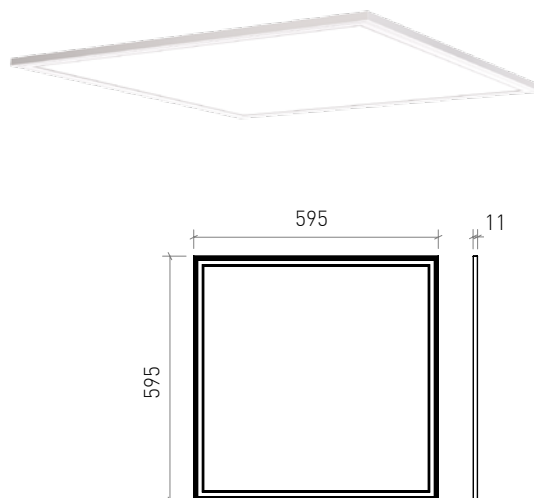

ORDER OPTIONS OPÇÕES DE ENCOMENDA

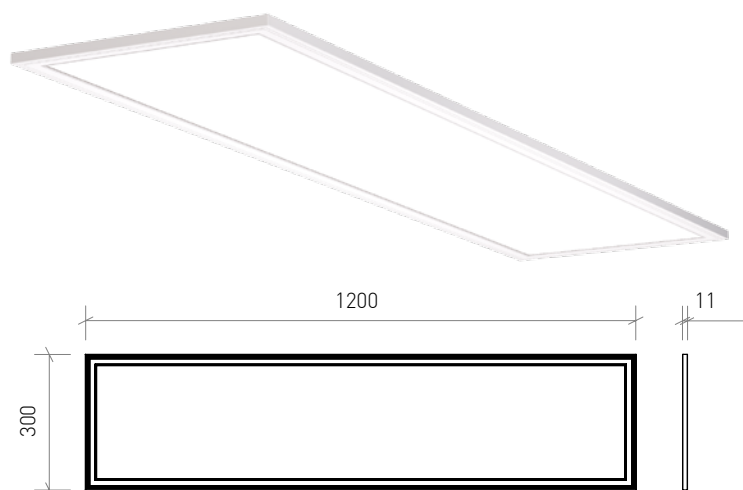


PRODUCT CODE	POWER	SIZE	CRI	IP	BEAM ANGLE	CCT	LUMINAIRE LUMENS
C3017-256.42	40 W	1200x300mm	>80	IP44	120°	4200K	4200lm
C3017-255.42	40 W	600x600mm	>80	IP44	120°	4200K	4200lm



PRODUCT CODE	POWER	REGULATION TYPE	SIZE	CRI	IP	BEAM ANGLE	CCT	LUMINAIRE LUMENS
C3017DA-256.42	40 W	DALI	1200x300mm	>80	IP44	120°	4200K	4200lm
C3017D-256.42	40 W	1-10V	1200x300mm	>80	IP44	120°	4200K	4200lm
C3017DA-255.42	40 W	DALI	600x600mm	>80	IP44	120°	4200K	4200lm
C3017D-255.42	40 W	1-10V	600x600mm	>80	IP44	120°	4200K	4200lm

ACCESSORIES OPTIONS OPÇÕES DE ACESSÓRIOS

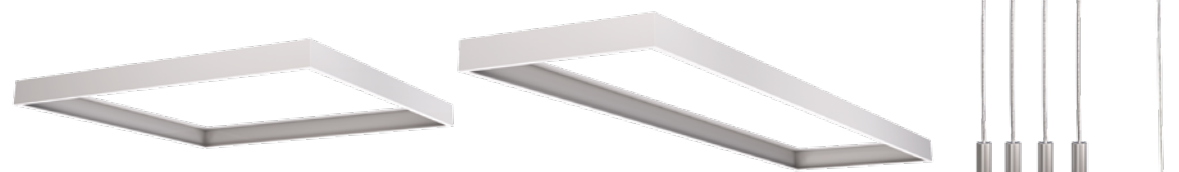

The suspension kit can be installed in the surface mounted frame.

O kit de suspensão pode ser aplicado no aro saliente.

ACCESSORY CODE	DESCRIPTION
3080-008	White surface mounted frame for MATRIX 600x600 . Aro saliente branco p/ MATRIX 600x600mm
3080-0014	White surface mounted frame for MATRIX 1200x300 . Aro saliente branco p/ MATRIX 1200x300mm
3080-0020	Suspension kit . Kit de suspensão
3080-013.TW	Round textured white ceiling cup of 38mm for electric cable . Remate de teto branco texturado de 38mm p/ cabo elétrico