SOLUÇÕES PROFISSIONAIS

PROFESSIONAL SOLUTIONS

FITAS E PERFIS

STRIPS AND PROFILES

brilumen®

Lighting emotions!

brilumen®

Lighting emotions!

www.brilumen.com

MADE IN PORTUGAL

A reprodução deste catálogo inteira ou parcialmente, bem como a utilização de texto ou imagens sem autorização, são expressamente proibidas.

It's expressly prohibited the total or part reproduction of this catalogue, as well as the use of text or images without previous permission.

PT

VISÃO
- A marca de iluminação profissional de elevada reputação.

MISSÃO
- Proporcionar uma oferta de produtos de iluminação de elevada qualidade e de última tecnologia.
- Através da procura permanente da excelência no serviço ao cliente, constituir uma opção forte e competitiva de especialistas em iluminação profissional, para profissionais.

VALORES
- Integridade, honestidade, verdade e profissionalismo;
- Respeitar o relacionamento com o cliente. Incentivar e manter parcerias de longo prazo;
- Proporcionar ganhos de valor ao cliente e à empresa;
- Criar bom ambiente no local de trabalho. Valorização e respeito pelas pessoas;
- Trabalho em equipa de forma consistente e focada;

EN

OUR VISION
- A high reputation professional lighting brand.

OUR MISSION
- Provide the latest technology in high quality lighting products.
- Always aiming for excellence in client service, build up a strong and competitive option of professional lighting specialists for professionals.

OUR VALUES
- Integrity, honesty, truth and vprofessionalism;
- Respect the relationship with the customer. Encourage and maintain long term partnerships;
- Provide value gains to the customer and business;
- Provide a healthy working environment. Value and respect people;
- Focused and solid team working;
- Innovation and quality.



LED NEON



2005-105 P.14
IP67 | 24V | 4,8W/m



2005-104 P.15
IP67 | 24V | 5W/m



2005-106 P.16
IP67 | 24V | 5W/m



2005-101 P.17
IP67 | 24V | 10W/m



2005-102 P.18
IP67 | 24V | 10W/m



2005-103 P.19
IP67 | 24V | 10W/m



2005-107 P.20
IP67 | 24V | 10W/m



2005-100 P.21
IP67 | 24V | 15W/m



FITAS LED COB | COB LED STRIPS



2002-160 P.24
IP20 | 24V | 6,5W/m



2002-158 P.25
IP20 | 24V | 11W/m



2002-171 P.26
IP20 | 24V | 11W/m



2002-159 P.27
IP20 | 24V | 12W/m



2002-172 P.28
IP65 | 24V | 11W/m



2002-162 P.29
IP67 | 24V | 6,5W/m



2002-161 P.30
IP67 | 24V | 12W/m



2002-173 P.31
IP65 | 230V | 9W/m

FITAS DE LED | LED STRIPS





2002-163 P.32
IP20 | 24V | 9,6W/m



2002-167 P.33
IP20 | 24V | 10W/m



2002-170 P.34
IP20 | 24V | 10,5W/m



2002-156 P.35
IP20 | 24V | 11W/m



2002-135 P.36
IP20 | 24V | 14,4W/m



2002-165 P.37
IP20 | 24V | 14,4W/m



2002-166 P.38
IP20 | 24V | 14,4W/m



2002-164 P.39
IP20 | 24V | 21,6W/m



2002-168 P.40
IP65 | 24V | 10W/m



2002-142 P.41
IP65 | 24V | 14,4W/m



2002-1116 P.42
IP65 | 24V | 14,4W/m



2002-169 P.43
IP67 | 24V | 10W/m



2002-174 P.44
IP65 | 230V | 9W/m

PERFIS DE ALUMÍNIO
ALUMINIUM PROFILES



SALIENTE | SURFACE



LP02 P.48
max. 12mm

2m G810-6022
2m G810-6023
2m G810-6024



LP06 P.50
max. 12mm

2m G810-6062



NP04 P.52
max. 24mm

2m G820-1012
2m G820-1013
2m G820-1014



NP06V2 P.54
max. 24mm

2m G830-1017
2m G830-1018
2m G830-1019



NP08 P.56
max. 16mm

2m G810-1020
2m G810-1021
2m G810-1022



NP17V2 P.58
max. 12/30mm

2m G812-3363
2m G812-3365
2m G812-3364



NP20V2 P.60
max. 20mm

2m G810-2210



OP13 P.62
max. 15mm

2m G810-1030



OP14 P.64
max. 12mm

2m G810-5050



OP16 P.66
max. 8mm

2m G810-1050
2m G810-1051



OP17 P.68
max. 11mm

2m G810-3082



OP18 P.70
max. 6mm

2m G810-1060
2m G810-1062



TRIX P.72
max. 12mm

2m 8010-2002

ENCASTRAR | RECESSED





IP03V2 P.76	LP03 P.78	LP08 P.80	NP05 P.82	NP07V2 P.84	NP21 P.86
max. 13mm	max. 12mm	max. 12mm	max. 22mm	max. 20mm	max. 20mm
2m 8010-2001	2m G810-6032	2m G810-6082	2m G820-6012	2m G830-5015	2m G810-2211
	2m G810-6034	2m G810-6088	2m G820-6014	2m G830-5016	
	2m G810-6033	2m G810-6089	2m G820-6013	2m G830-5017	

MONTAGEM | MOUNTING

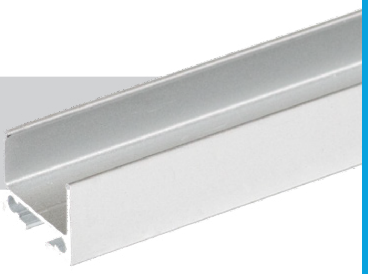



LP10 P.90	LP10.1 P.92
max. 12mm	max. 12mm
2m G810-7012	2m G810-1080
2m G810-7013	
2m G810-7014	

CANTO | CORNER





LN10 P.96	NP10 P.98	NP19V3 P.100	OP05 P.102	OP23V2 P.104	PW01 P.106
max. 10mm	max. 13mm	max. 20mm	max. 12mm	max. 11mm	max. 18mm
2m G812-1400	2m G860-0043	2m G812-3359	2m G812-3100	2m G810-4060	2m G810-2085
				2m G810-4062	2m G810-2084
				2m G810-4064	

PERFIS DE ALUMÍNIO
ALUMINIUM PROFILES



INDIRETO | INDIRECT



AV02 P.110
max. 16mm

2m	G812-3154	
2m	G812-3156	
2m	G812-3155	



AV03 P.112
max. 16mm

2m	G812-3157	
2m	G812-3159	
2m	G812-3158	



AV04 P.114
max. 14/16mm

2m	G812-3160	
2m	G812-3162	
2m	G812-3161	



AV05 P.116
max. 16mm

2m	G812-3163	
2m	G812-3165	
2m	G812-3164	



AV06 P.118
max. 12/16mm

2m	G812-3166	
2m	G812-3167	



LP13 P.120
max. 12mm

2m	G810-1004	
2m	G810-1003	
2m	G810-1002	



GESSO CARTONADO | DRYWALL



BTP01 P.124
max. 6mm

2m	G810-2050	
2m	G810-2056	



BTP02 P.126
max. 11mm

2m	G810-2040	
2m	G810-3040	



BTP03 P.128
max. 14mm

2m	G810-2051	



BTP04 P.130
max. 14mm

2m	G810-2042	



BTP05 P.132
max. 20mm

2m	G810-2043	



BTP06 P.134
max. 14mm

2m	G810-2044	



BTP07 P.136
max. 6mm

2m	G810-2045	

BTP10 P.138
max. 11mm

2m	G810-2047	
2m	G810-3047	
2m	G810-2053	

BTP08

2m	G810-2046	
2m	G810-3046	
2m	G810-2052	

BTP11 P.140
max. 14mm

2m	G810-2048	
2m	G810-3048	
2m	G810-2054	

BTP08

2m	G810-2046	
2m	G810-3046	
2m	G810-2052	

BTP12 P.142
max. 14mm

2m	G810-2049	
2m	G810-3049	
2m	G810-2055	



BTP13 P.144
max. 20mm

2m	G810-3090	



AZULEJO | TILE



PF01 P.148	PF02 P.150	PF03 P.152	PF04 P.154	PF05 P.156	PF08V2 P.158
max. 12mm	max. 12mm	max. 8mm	max. 10mm	max. 12mm	max. 12mm
2m G810-2032	2m G810-2034	2m G812-3174	2m G812-3176	2m G810-2036	2m G810-2230
		2m G812-3322	2m G812-3320		



ESPECIAL | SPECIAL



NP33 P.162	PB02 P.164	PM01 P.166	PM02 P.168	PS01 P.170
max. 14mm	max. 12mm	max. 6mm	max. 6mm	max. 13mm
2m G810-5050	2m G810-2083	2m G812-3168	2m G812-3171	2m G812-2100
		2m G812-3170	2m G812-3173	
		2m G812-3169	2m G812-3172	

FONTES E CONTROLADORES
POWER SUPLLYS & CONTROLLERS



FONTES DE ALIMENTAÇÃO | POWER SUPPLY



24V P.174
ON / OFF



24V P.174
ON / OFF



24V P.174
ON / OFF



24V P.174
ON / OFF



24V P.175
DALI - 2



24V P.175
DALI - 2



24V P.175
TRIAC



24V P.176
WIRELESS



24V P.176
WIRELESS



24V P.176
WIRELESS



CONTROLADORES | CONTROLLERS



P.177
SCENECOM S



P.177
DALI Power Supply



P.177
DALI XC Module



P.178
Active Module CASAMBI



P.178
Active Module TRIDONIC



P.178
Passive module CASAMBI



P.178
Passive module TRIDONIC



P.178
CASAMBI Sensor



P.180
CASAMBI Module 4ch

CONTROLADORES | CONTROLLERS









P.180 CASAMBI Switch

P.180 CASAMBI Interface

P.181 Controller + Remote Control RF











P.181 Amplifier RF

P.182 WI-FI Controller

P.182 WI-FI/RF Cotroller

P.183 Remote Controller

P.183 RF Touch Panel

LUMINÁRIAS | LIGHTINGS







FOLLOW-ME P.186
EMERGENCY LIGHTING

SOFTIS P.190
INDUSTRIAL LIGHTING

LED NEON







2005-105
LED NEON

PROFISSIONAL | PROFESSIONAL

196 LED/M

SMD 2216	24V	24H	IP67	CLASS III	-20º ~40º	CUT 3.57CM	5 YEARS WARRANTY	5m	CE
LED TYPE	VOLTAGE	USE							

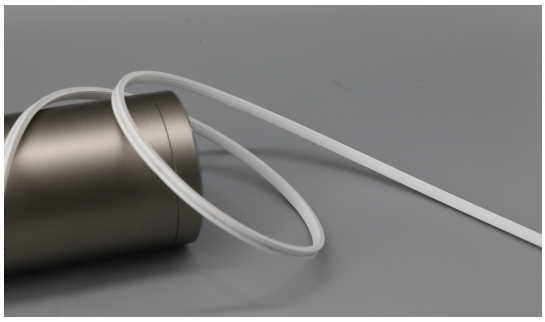

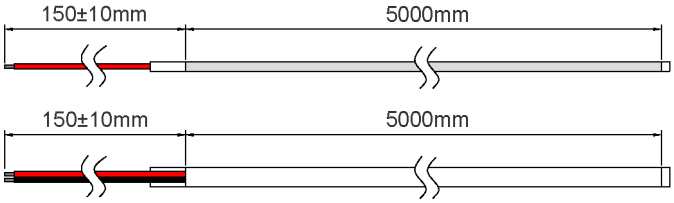



TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
4,8 W/m	90	3000K 4000K	140 lm/m 150 lm/m	29 lm/W 31 lm/W	2005-105.90.30 2005-105.90.40



Topo inicial | Entry cap

8110-0015



Topo final | End cap

8110-0016



2005-104
LED NEON

PROFISSIONAL | PROFESSIONAL

240 LED/M

SMD 2219	24V	24H	IP67	CLASS III	-20º ~40º	CUT 2,5CM	5 YEARS WARRANTY	5m	CE
LED TYPE	VOLTAGE	USE							



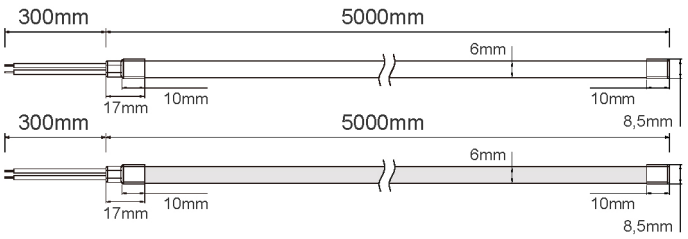



TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
5 W/m	90	3000K 4000K	385 lm/m 385 lm/m	77 lm/W 77 lm/W	2005-104.90.30 2005-104.90.40



Topo inicial | Entry cap

8110-0011



Topo final | End cap

8110-0012



Clip de alumínio | Aluminium clip

8110-0013



Perfil de alumínio 1m | Aluminium profile 1m

8110-0014



2005-106
LED NEON
PROFISSIONAL | PROFESSIONAL
120 LED/M

SMD 2835	24V	24H	IP67	CLASS III	-20º ~40º	CUT 5CM	5 YEARS WARRANTY	5m	CE
LED TYPE	VOLTAGE	USE							



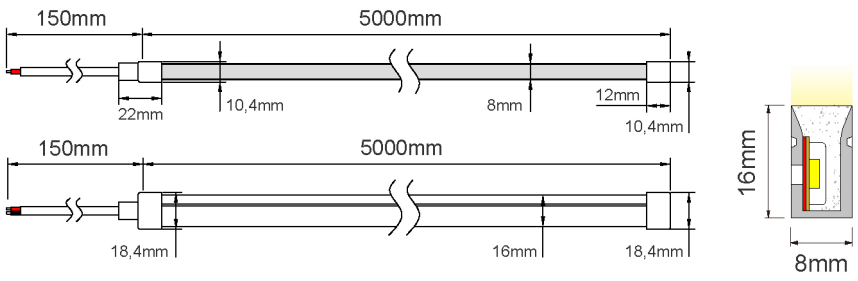

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
5 W/m	90	3000K 4000K	154 lm/m 186 lm/m	31 lm/W 37 lm/W	2005-106.90.30 2005-106.90.40



Topo inicial | Entry cap

8110-0017



Topo final | End cap

8110-0018



Clip de alumínio | Aluminium clip

8110-0019



Perfil de alumínio 1m | Aluminium profile 1m

8110-0020



2005-101
LED NEON

PROFISSIONAL | PROFESSIONAL
168 LED/M

SMD 2835	24V	24H	IP67	CLASS III	-20º ~40º	CUT 4,16CM	5 YEARS WARRANTY	5m	CE
LED TYPE	VOLTAGE	USE							

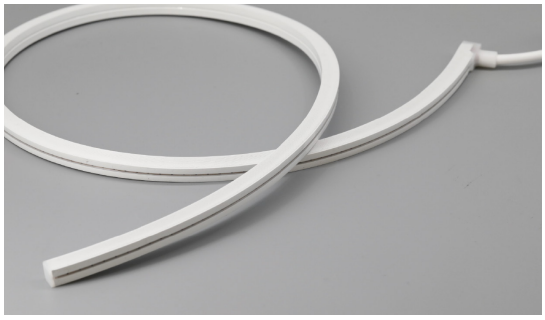

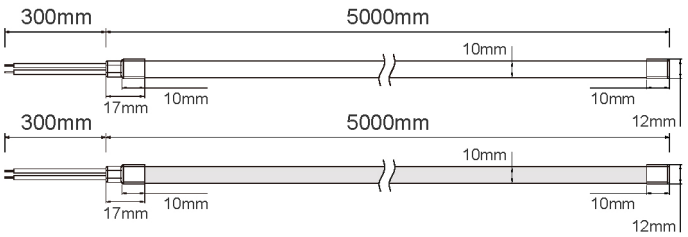



TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
10 W/m	90	3000K 4000K	760 lm/m 760 lm/m	76 lm/W 76 lm/W	2005-101.90.30 2005-101.90.40



Topo inicial | Entry cap
8110-0006



Topo final | End cap
8110-0007



Clip de alumínio | Aluminium clip
8110-0008



Perfil de alumínio 1m | Aluminium profile 1m
8110-0009



Perfil alumínio S | Aluminium profile S
8110-0010



2005-102
LED NEON

PROFISSIONAL | PROFESSIONAL
168 LED/M

SMD 2835	24V	24H	IP67	CLASS III	-20º ~40º	CUT 4,16CM	5 YEARS WARRANTY	5m	CE
LED TYPE	VOLTAGE	USE							

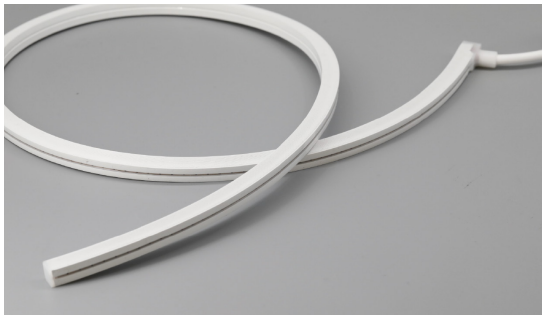

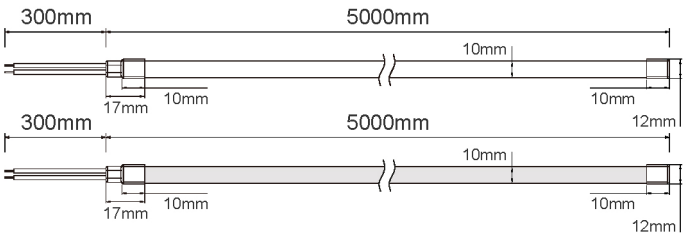



TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
10 W/m	90	3000K 4000K	760 lm/m 760 lm/m	76 lm/W 76 lm/W	2005-102.90.30 2005-102.90.40



Topo inicial | Entry cap

8110-0006



Topo final | End cap

8110-0007



Clip de alumínio | Aluminium clip

8110-0008



Perfil de alumínio 1m | Aluminium profile 1m

8110-0009



Perfil alumínio S | Aluminium profile S

8110-0010



2005-103
LED NEON

PROFISSIONAL | PROFESSIONAL
168 LED/M

SMD 2835	24V	24H							
LED TYPE	VOLTAGE	USE	IP67	CLASS III	-20º ~40º	CUT 4,16CM	5 YEARS WARRANTY	5m	CE

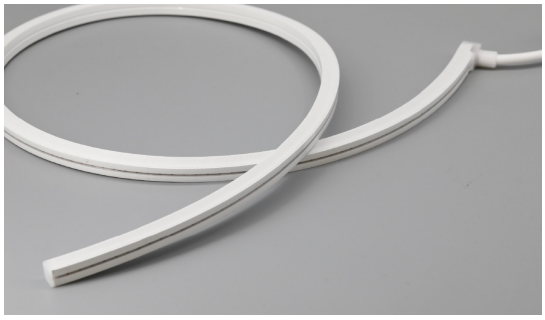

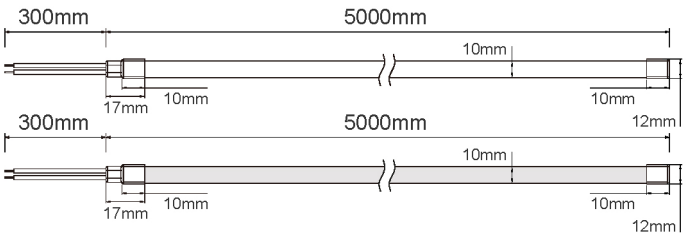

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
10 W/m	90	2700K	780 lm/m	78 lm/W	2005-103.90.27
		3000K	800 lm/m	80 lm/W	2005-103.90.30
		4000K	800 lm/m	80 lm/W	2005-103.90.40



Topo inicial | Entry cap
8110-0006



Topo final | End cap
8110-0007



Clip de alumínio | Aluminium clip
8110-0008



Perfil de alumínio 1m | Aluminium profile 1m
8110-0009



Perfil alumínio S | Aluminium profile S
8110-0010



2005-107
LED NEON
PROFISSIONAL | PROFESSIONAL
192 LED/M

SMD 2216	24V	24H	IP67	CLASS III	-20º ~40º	CUT 3,1CM	5 YEARS WARRANTY	5m	CE
LED TYPE	VOLTAGE	USE							



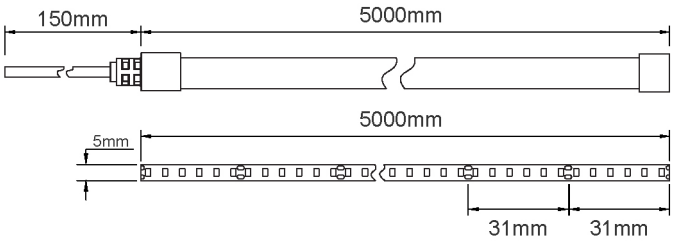

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
10 W/m	90	3000K 4000K	530 lm/m 540 lm/m	53 lm/W 54 lm/W	2005-107.90.30 2005-107.90.40



Topo inicial | Entry cap

8110-0021



Topo final | End cap

8110-0022



Clip de PVC | PVC clip

8110-0023



Perfil de PVC 1m | PVC profile 1m

8110-0024

2005-100
LED NEON

PROFISSIONAL | PROFESSIONAL

120 LED/M

SMD 2835	24V	24H					5 YEARS WARRANTY		
LED TYPE	VOLTAGE	USE	IP67	CLASS III	-20º ~40º	CUT 5CM		5m	



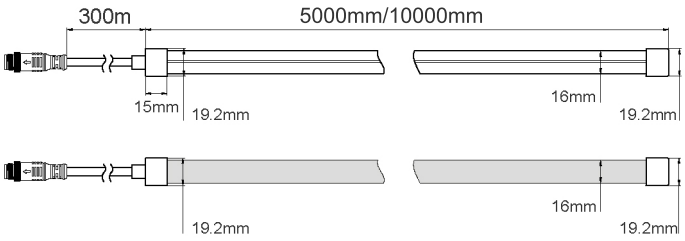



TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
15 W/m	90	2700K	766 lm/m	51 lm/W	2005-100.90.27
15 W/m	90	3000K	870 lm/m	58 lm/W	2005-100.90.30
15 W/m	90	4000K	915 lm/m	61 lm/W	2005-100.90.40
RGB-R 5 W/m RGB-G 5 W/m RGB-B 5 W/m	–	–	RGB-R 108 lm/m RGB-G 194 lm/m RGB-B 41 lm/m	RGB-R 22 lm/W RGB-G 39 lm/W RGB-B 8 lm/W	2005-100.RGB



Topo inicial | Entry cap

8110-0001



Topo final | End cap

8110-0002



Clip de alumínio | Aluminium clip

8110-0003



Perfil de alumínio 1m | Aluminium profile 1m

8110-0004



Perfil alumínio S | Aluminium profile S

8110-0005

FITAS DE LED | LED STRIPS





2002-160
FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL

480 LED/M

COB	24V	24H							
LED TYPE	VOLTAGE	USE	IP20	CLASS III	-20º ~40º	CUT 2,5CM	5 YEARS WARRANTY	5m	CE



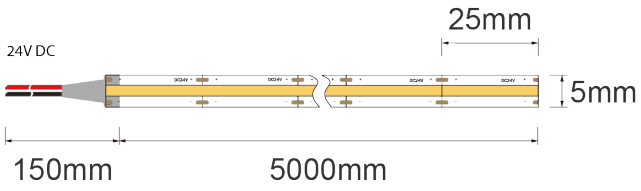

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
6,5 W/m	90	3000K	617 lm/m	95 lm/W	2002-160.90.30
		4000K	650 lm/m	100 lm/W	2002-160.90.40



2002-158
FITA LED | LED STRIP
PROFISSIONAL | PROFESSIONAL
512 LED/M

COB	24V	24H							
LED TYPE	VOLTAGE	USE	IP20	CLASS III	-20º ~40º	CUT 6,25CM	5 YEARS WARRANTY	5m	CE



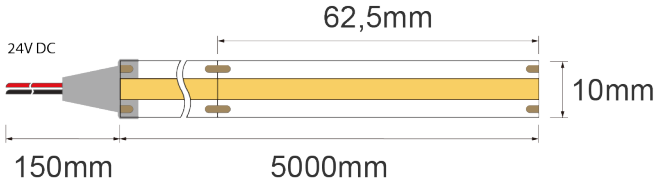

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
11 W/m	90	2700K	990 lm/m	90 lm/W	2002-158.90.27
		3000K	1050 lm/m	95 lm/W	2002-158.90.30
		4000K	1150 lm/m	105 lm/W	2002-158.90.40



2002-171
FITA LED | LED STRIP

ECO
256 LED/M

COB	24V	6H							
LED TYPE	VOLTAGE	USE	IP20	CLASS III	-20º ~40º	CUT 3,1CM	3 YEARS WARRANTY	5m	CE



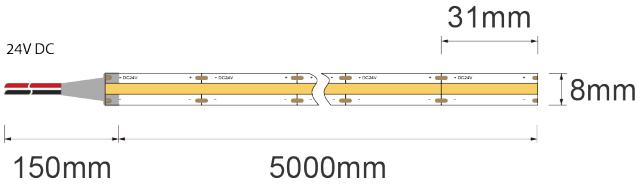

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
11 W/m	90	3000K	1139 lm/m	103 lm/W	2002-171.90.30
		4000K	1180 lm/m	107 lm/W	2002-171.90.40



2002-159
FITA LED | LED STRIP
PROFISSIONAL | PROFESSIONAL
480 LED/M

COB	24V	24H							
LED TYPE	VOLTAGE	USE	IP20	CLASS III	-20º ~40º	CUT 5CM	5 YEARS WARRANTY	5m	CE



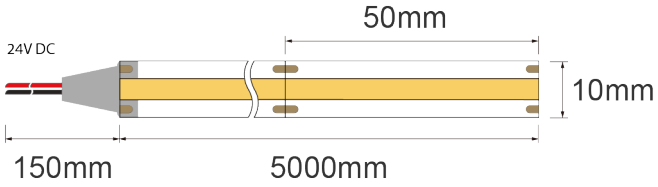

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
12 W/m	80	3000K	1260 lm/m	105 lm/W	2002-159.80.30
		4000K	1320 lm/m	110 lm/W	2002-159.80.40

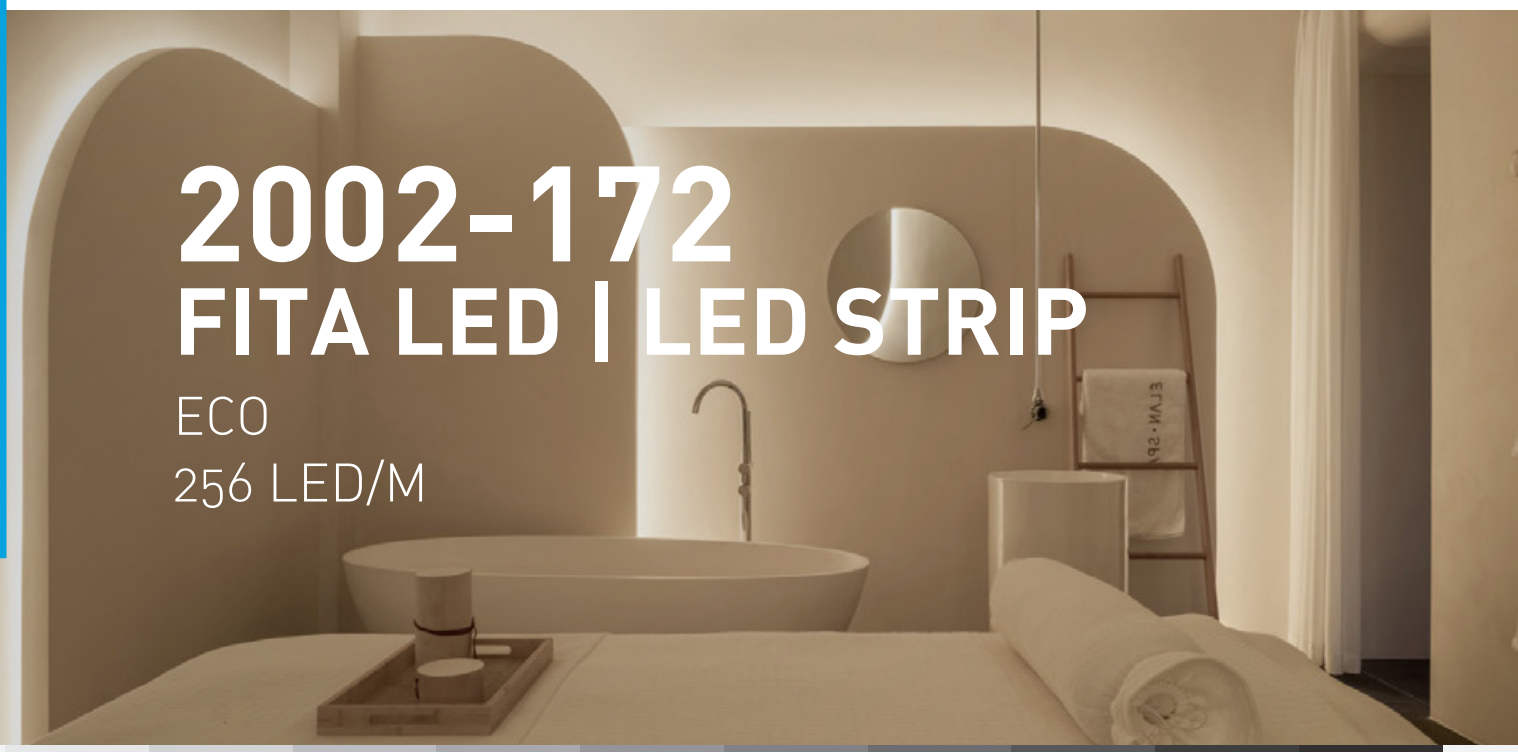

2002-172
FITA LED | LED STRIP

ECO
256 LED/M

COB	24V	6H							
LED TYPE	VOLTAGE	USE	IP65	CLASS III	-20º ~40º	CUT 3,1CM	3 YEARS WARRANTY	5m	CE



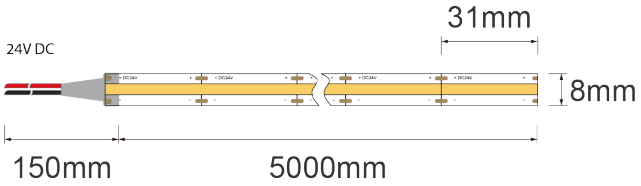

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
11 W/m	90	3000K	1139 lm/m	103 lm/W	2002-172.90.30
		4000K	1180 lm/m	107 lm/W	2002-172.90.40



2002-162
FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL

480 LED/M

COB	24V	24H							
LED TYPE	VOLTAGE	USE	IP67	CLASS III	-20º ~40º	CUT 2,5CM	5 YEARS WARRANTY	5m	CE



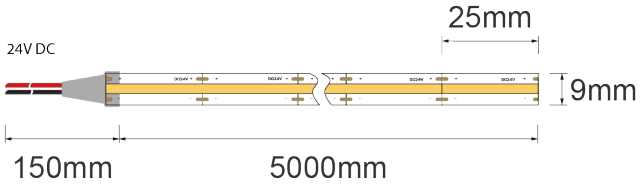

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
6,5 W/m	90	3000K	617 lm/m	95 lm/W	2002-162.90.30
		4000K	650 lm/m	100 lm/W	2002-162.90.40



2002-161
FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
480 LED/M

COB	24V	24H							
LED TYPE	VOLTAGE	USE	IP67	CLASS III	-20º ~40º	CUT 5CM	5 YEARS WARRANTY	5m	CE



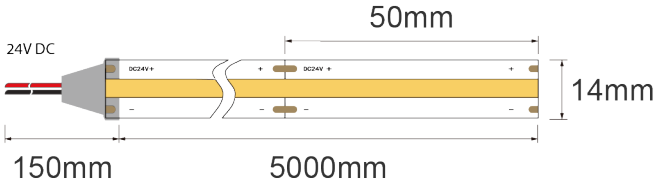

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
12 W/m	80	3000K	1260 lm/m	105 lm/W	2002-161.80.30
		4000K	1320 lm/m	110 lm/W	2002-161.80.40



2002-173
FITA LED | LED STRIP

ECO
288 LED/M

COB	230V AC	6H							
LED TYPE	VOLTAGE	USE	IP65	CLASS III	-20º ~40º	CUT 50CM	2 YEARS WARRANTY	50m	CE

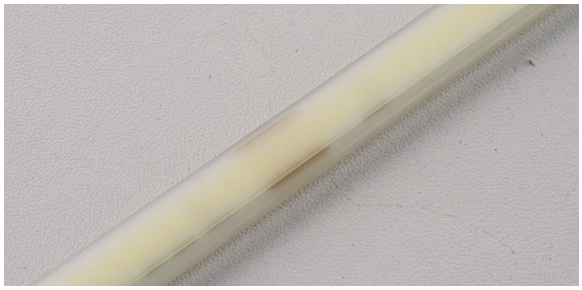

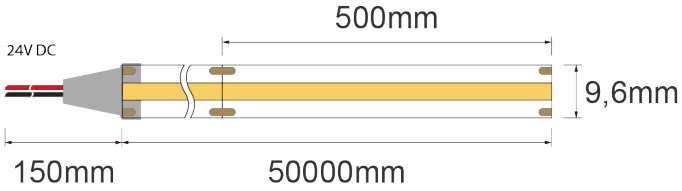

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
9 W/m	80	3000K	598 lm/m	66 lm/W	2002-173.80.30
		4000K	620 lm/m	68 lm/W	2002-173.80.40



Retificador | Power cord
8013-0050



Topo | End cap
8013-0051



Braçadeira | Clip
8013-0052



2002-163
FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL

180 LED/M

SMD 2835	24V	24H							
LED TYPE	VOLTAGE	USE	IP20	CLASS III	-20º ~40º	CUT 5CM	5 YEARS WARRANTY	5m	CE



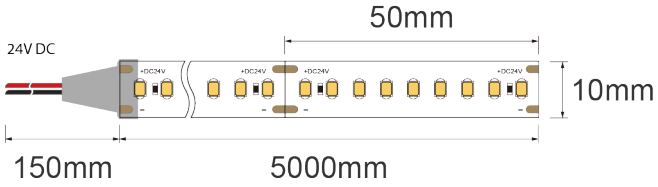

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
9,6 W/m	80	3000K	1850 lm/m	192 lm/W	2002-163.80.30
		4000K	1920 lm/m	200 lm/W	2002-163.80.40



2002-167
FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL

112 LED/M

SMD 2835	24V	24H							
LED TYPE	VOLTAGE	USE	IP20	CLASS III	-20º ~40º	CUT 7,14CM	5 YEARS WARRANTY	5/25m	CE





TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
10 W/m	80	3000K	1550 lm/m	155 lm/W	2002-167.80.30
		4000K	1600 lm/m	160 lm/W	2002-167.80.40
		3000K	1550 lm/m	155 lm/W	2002-167.80.30-25M
		4000K	1600 lm/m	160 lm/W	2002-167.80.40-25M



2002-170
FITA LED | LED STRIP

ECO
120 LED/M

SMD 2835	24V	6H							
LED TYPE	VOLTAGE	USE	IP20	CLASS III	-20º ~40º	CUT 5CM	3 YEARS WARRANTY	5m	CE

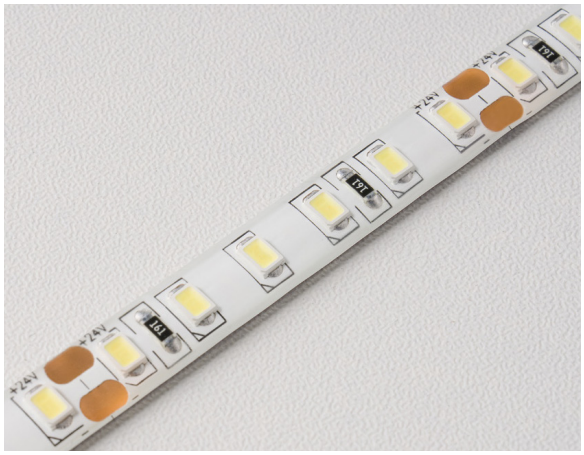

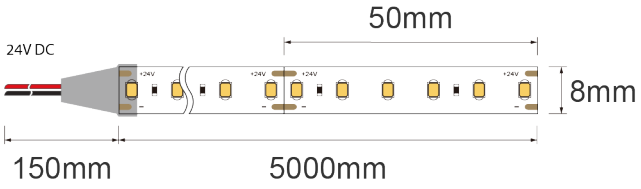

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
10,5 W/m	80	3000K	1062 lm/m	101 lm/W	2002-170.80.30
		4000K	1100 lm/m	104 lm/W	2002-170.80.40

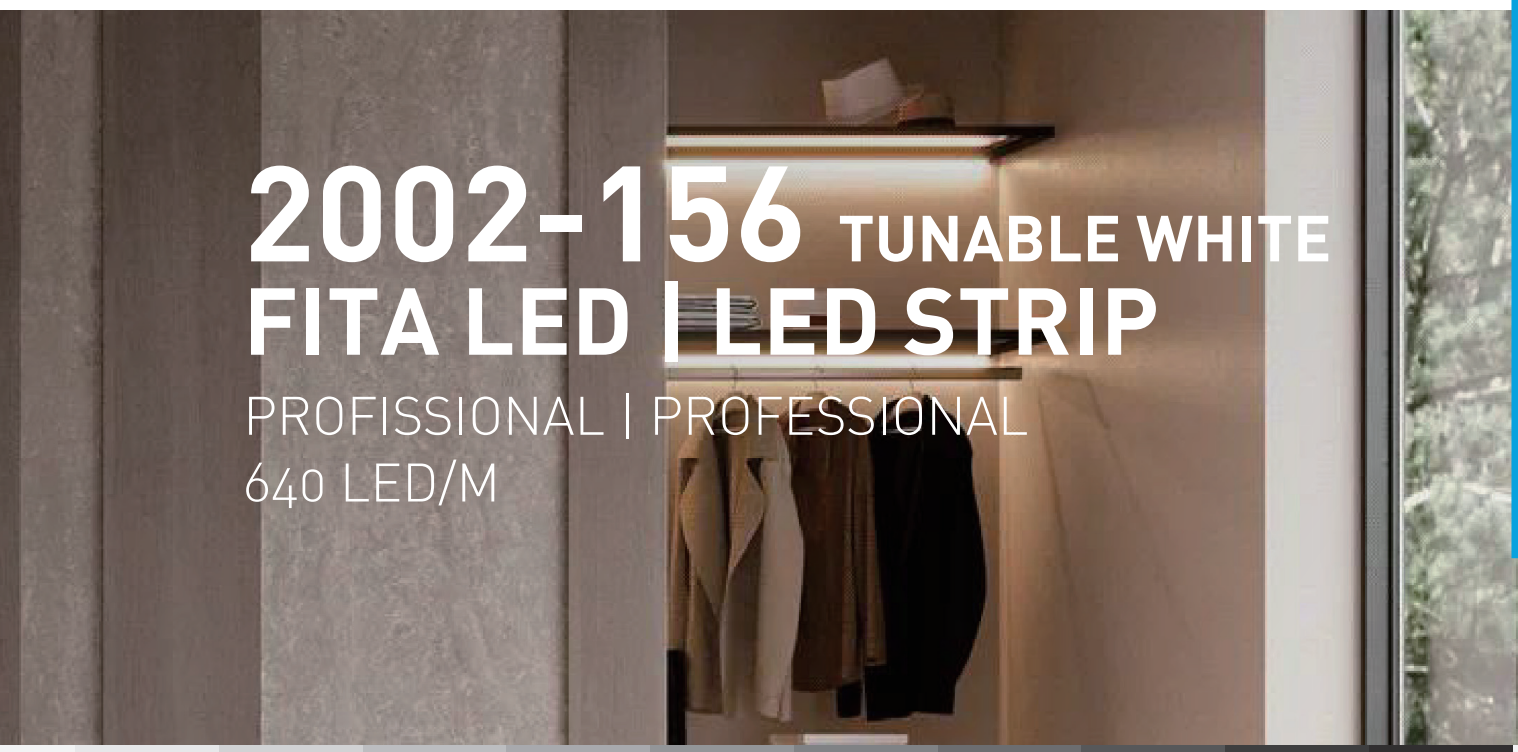

2002-156 TUNABLE WHITE
FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
640 LED/M

CSP 640	24V	24H	IP20	CLASS III	-20º ~40º	CUT 5CM	5 YEARS WARRANTY	5m	CE
LED TYPE	VOLTAGE	USE							



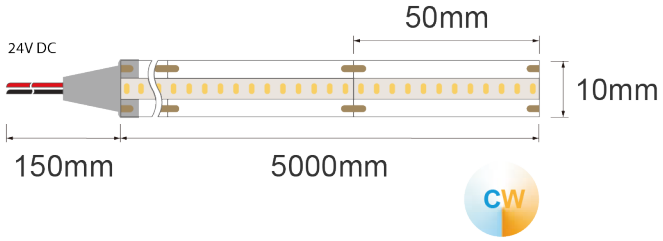

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
5,5 W/m	80	2700K	528 lm/m	96 lm/W	2002-156.92765
11 W/m		4000K	1100 lm/m	100 lm/W	
5,5 W/m		6500K	566 lm/m	103 lm/W	



2002-135
FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
60 LED/M

SMD 2835	24V	24H							
LED TYPE	VOLTAGE	USE	IP20	CLASS III	-20º ~40º	CUT 10CM	5 YEARS WARRANTY	5m	CE



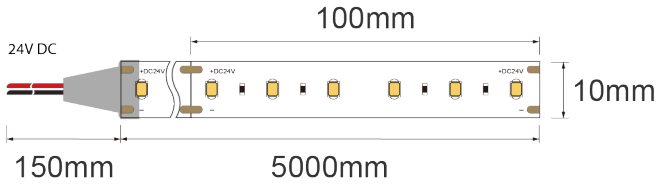

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
14,4 W/m	80	2700K	1195 lm/m	83 lm/W	2002-135.80.27
		3000K	1253 lm/m	87 lm/W	2002-135.80.30
		4200K	1296 lm/m	90 lm/W	2002-135.80.42
		6500K	1368 lm/m	95 lm/W	2002-135.80.65



Conetor fita LED 12,5mm
LED strip connector 12,5mm
8013-0026

Conetor fita LED 14,5mm
LED strip connector 14,5mm
8013-0014



Conetor com ligador
Connector with wire
8013-0015



Conetor duplo com ligador
Double connector with wire
8013-0016



Conetor em L
L connector
8013-0017

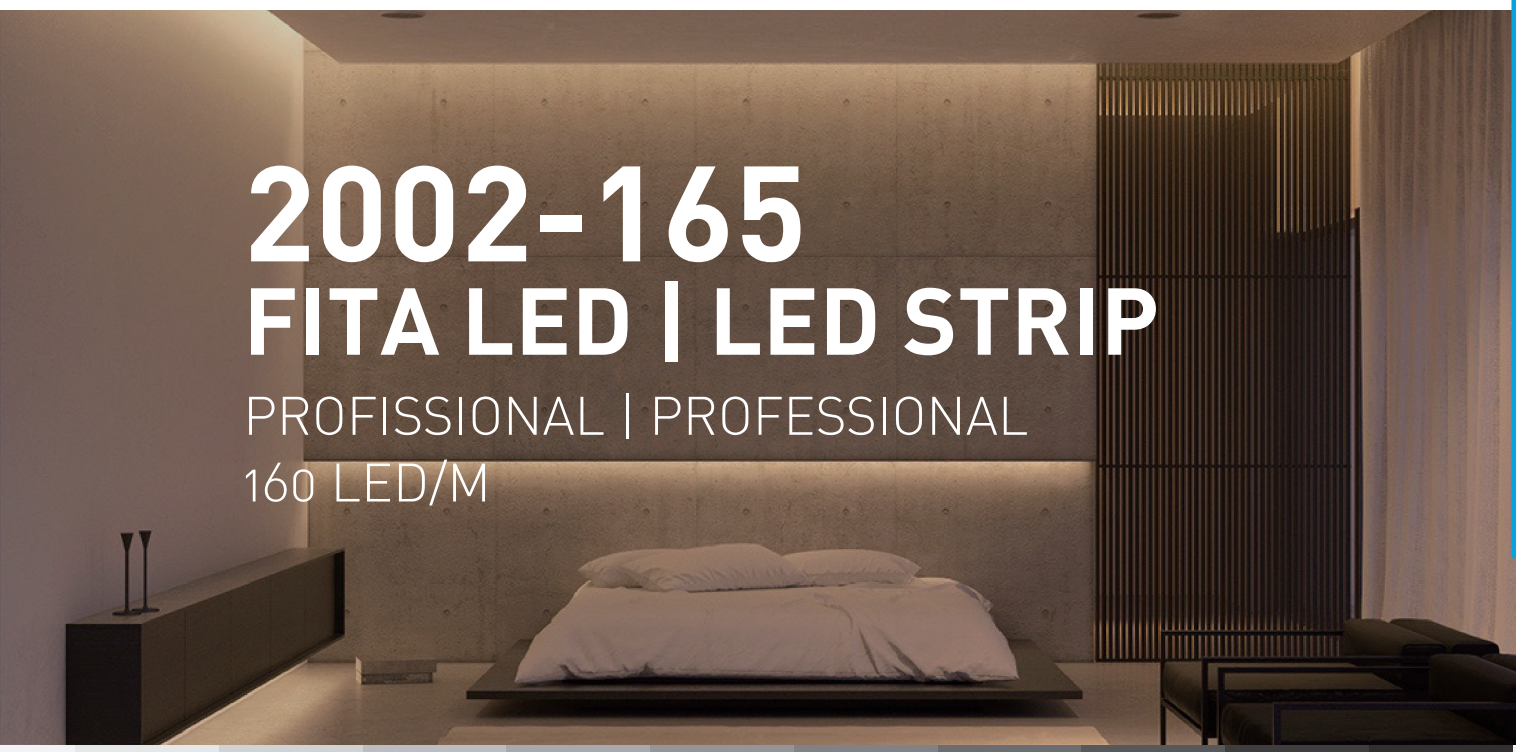

2002-165
FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL

160 LED/M

SMD 2835	24V	24H							
LED TYPE	VOLTAGE	USE	IP20	CLASS III	-20º ~40º	CUT 5CM	5 YEARS WARRANTY	5m	CE



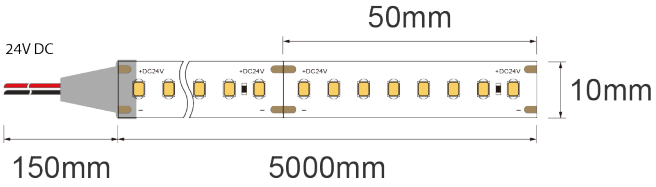

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
14,4 W/m	80	3000K	2203 lm/m	153 lm/W	2002-165.80.30
		4000K	2304 lm/m	160 lm/W	2002-165.80.40

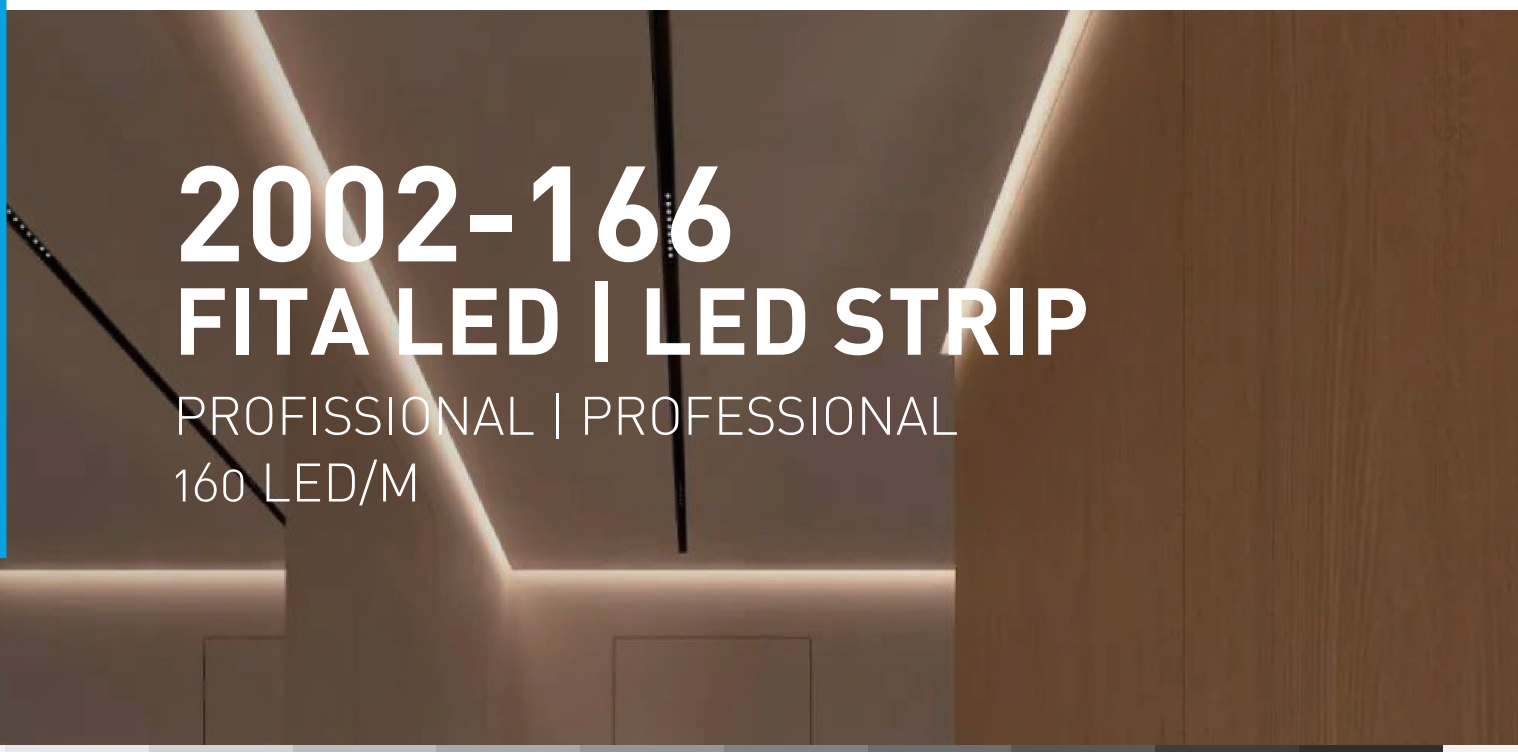

2002-166
FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL

160 LED/M

SMD 2835	24V	24H							
LED TYPE	VOLTAGE	USE	IP20	CLASS III	-20º ~40º	CUT 5CM	5 YEARS WARRANTY	5m	CE



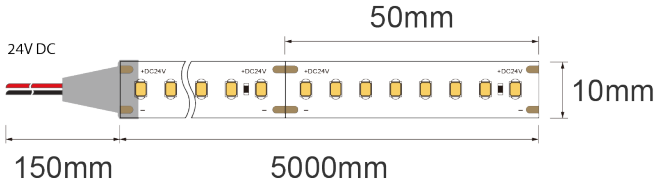

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
14,4 W/m	90	2700K	1756 lm/m	122 lm/W	2002-166.90.27
		3000K	1857 lm/m	129 lm/W	2002-166.90.30
		4000K	1944 lm/m	135 lm/W	2002-166.90.40



2002-164
FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL

240 LED/M

SMD 2835	24V	24H							
LED TYPE	VOLTAGE	USE	IP20	CLASS III	-20º ~40º	CUT 3,33CM	5 YEARS WARRANTY	5m	CE



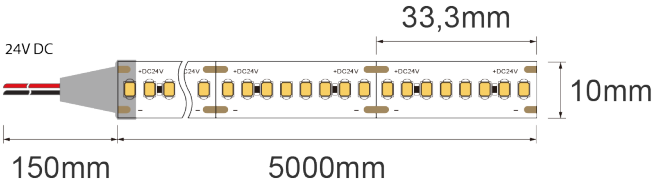

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
21,6 W/m	80	3000K	3265 lm/m	151 lm/W	2002-164.80.30
		4000K	3456 lm/m	160 lm/W	2002-164.80.40

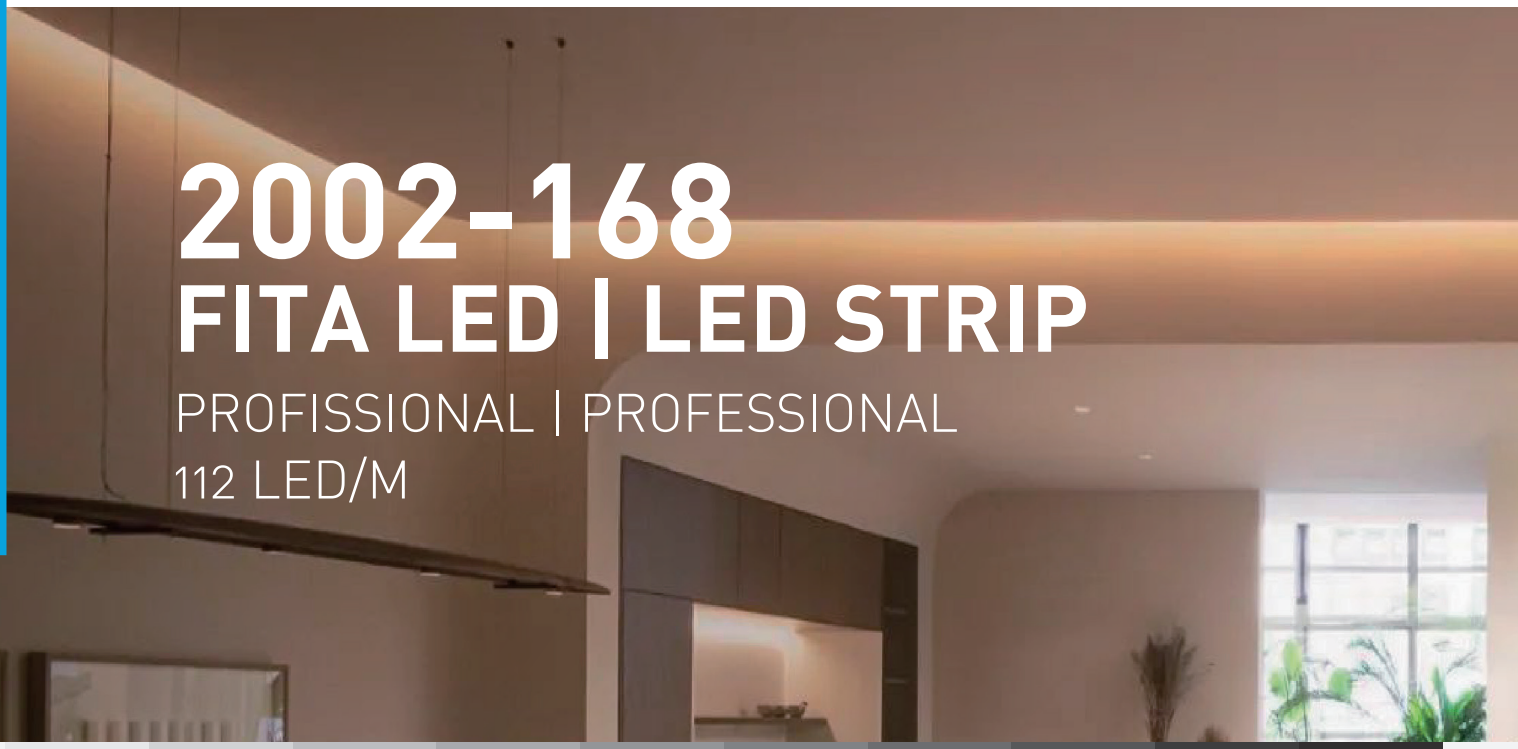

2002-168
FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL

112 LED/M

SMD 2835	24V	24H							
LED TYPE	VOLTAGE	USE	IP65	CLASS III	-20º ~40º	CUT 7,14CM	5 YEARS WARRANTY	5m	CE





TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
10 W/m	80	3000K	1550 lm/m	155 lm/W	2002-168.80.30
		4000K	1600 lm/m	160 lm/W	2002-168.80.40



2002-142
FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
60 LED/M

SMD 2835	24V	24H	IP65	CLASS III	-20º ~40º	CUT 10CM	5 YEARS WARRANTY	5m	CE
LED TYPE	VOLTAGE	USE							



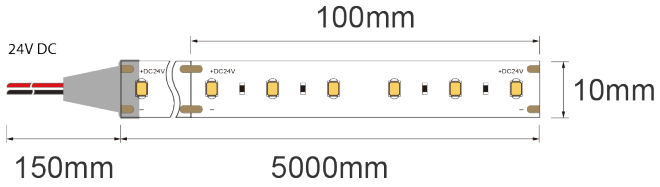

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
14,4 W/m	80	2700K	1195 lm/m	83 lm/W	2002-142.80.27
		3000K	1253 lm/m	87 lm/W	2002-142.80.30
		4200K	1296 lm/m	90 lm/W	2002-142.80.42
		6500K	1368 lm/m	95 lm/W	2002-142.80.65



2002-1116 RGBW
FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL

60 LED/M

SMD 5050	24V	24H	IP65	CLASS III	-20º ~40º	CUT 10CM	5 YEARS WARRANTY	5m	CE
LED TYPE	VOLTAGE	USE							



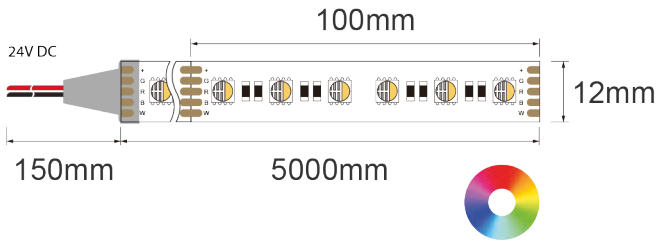

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
3,6 W/m		RED(620-625NM)	100 lm/m	28 lm/W	
3,6 W/m		GREEN(520-525NM)	240 lm/m	67 lm/W	
3,6 W/m	80	BLUE(460-470NM)	65 lm/m	18 lm/W	2002-1116
3,6 W/m		6500K	370 lm/m	103 lm/W	
14,4 W/m		RGBW	775 lm/m	54 lm/W	

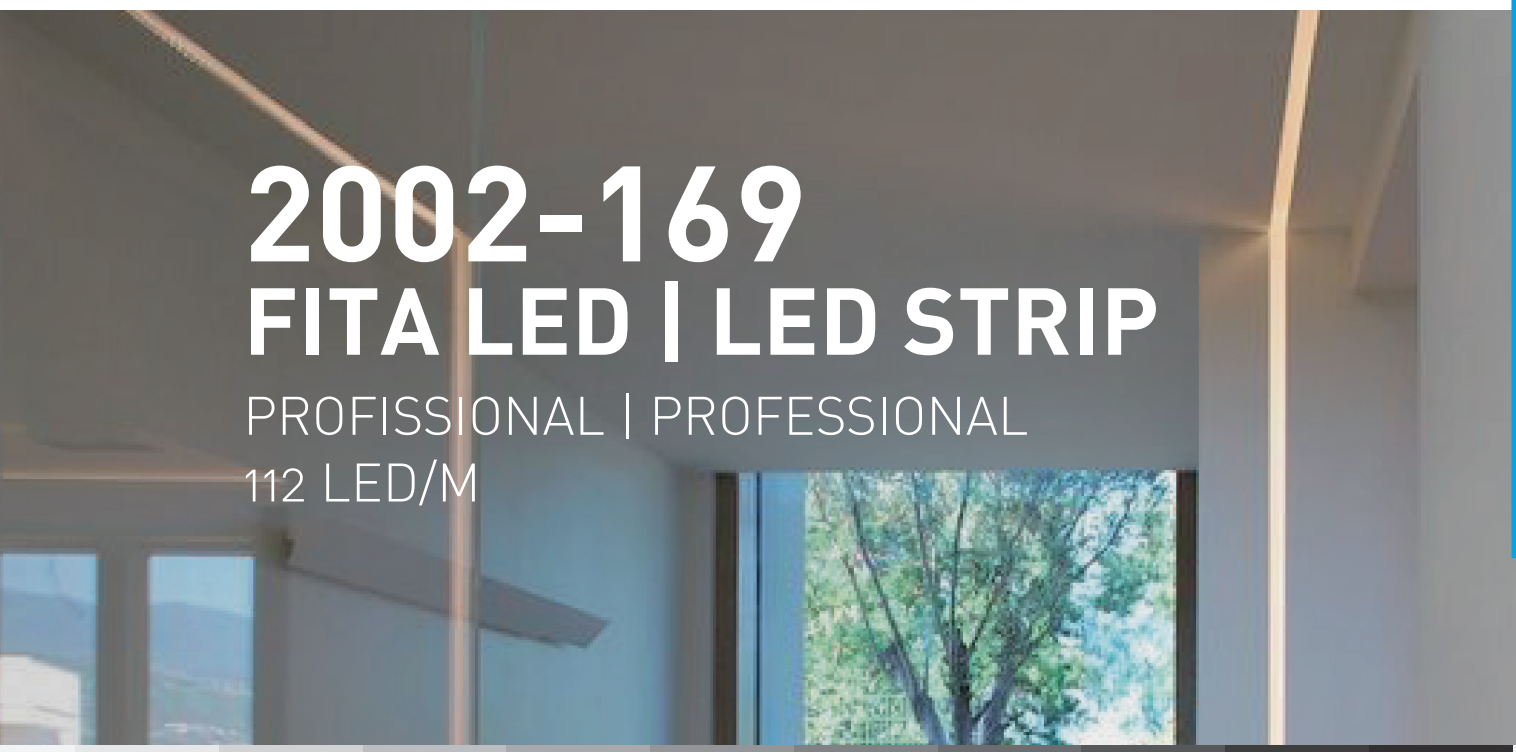

2002-169
FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL

112 LED/M

SMD 2835	24V	24H							
LED TYPE	VOLTAGE	USE	IP67	CLASS III	-20º ~40º	CUT 7,14CM	5 YEARS WARRANTY	5m	CE



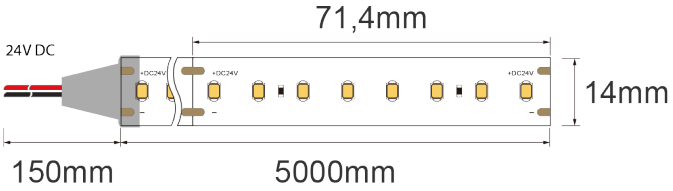

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
10 W/m	80	3000K	1550 lm/m	155 lm/W	2002-169.80.30
		4000K	1600 lm/m	160 lm/W	2002-169.80.40

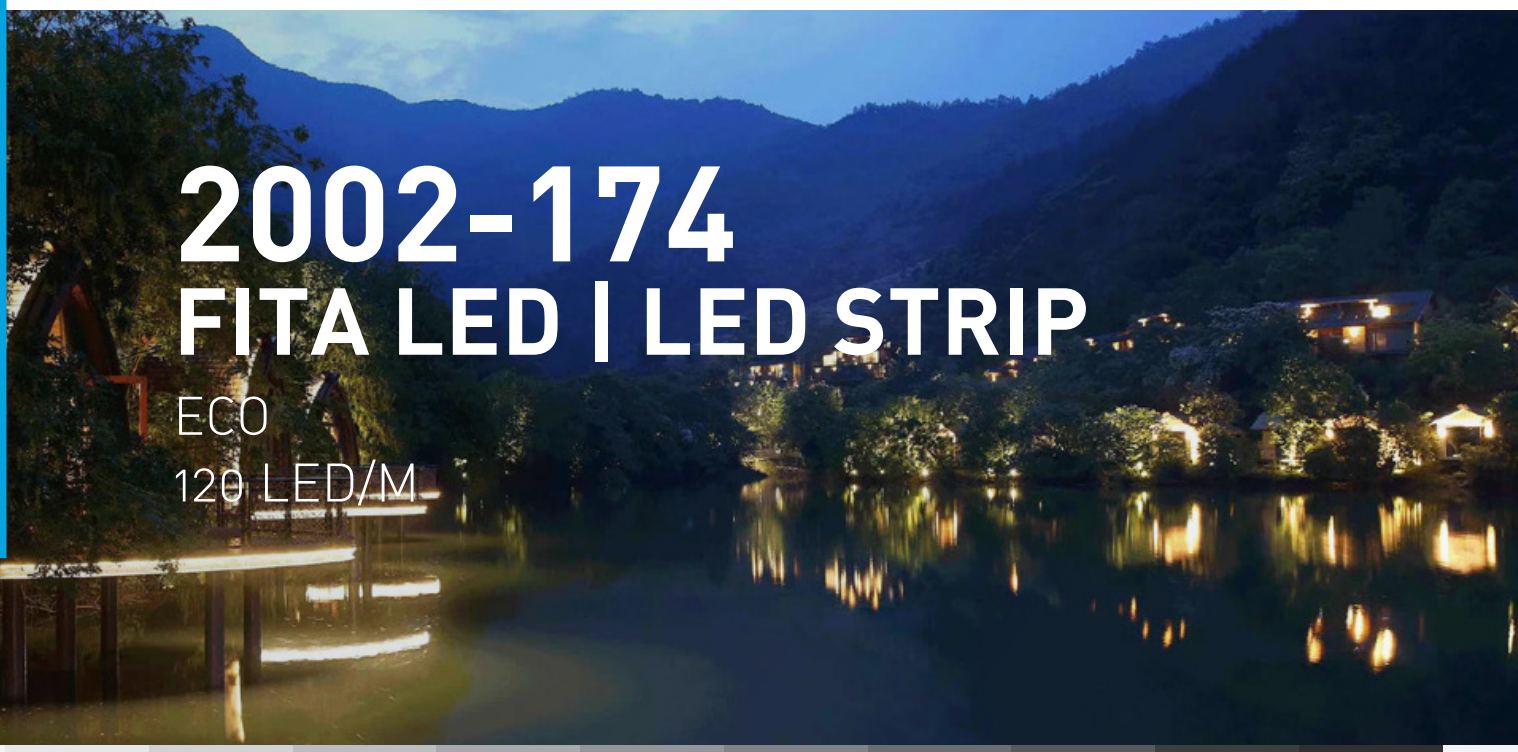

2002-174
FITA LED | LED STRIP

ECO

120 LED/M

SMD 2835	230V AC	6H	IP65	CLASS III	-20º ~40º	CUT 10CM	2 YEARS WARRANTY	100m	CE
LED TYPE	VOLTAGE	USE							



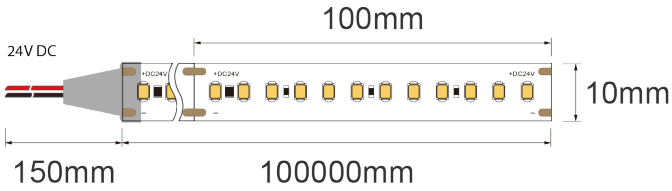

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
9 W/m	80	3000K	1091 lm/m	121 lm/W	2002-174.80.30
		4000K	1130 lm/m	125 lm/W	2002-174.80.40



Conetor | Connector
8013-0053



Topo | End cap
8013-0054



Braçadeira | Clip
8013-0055

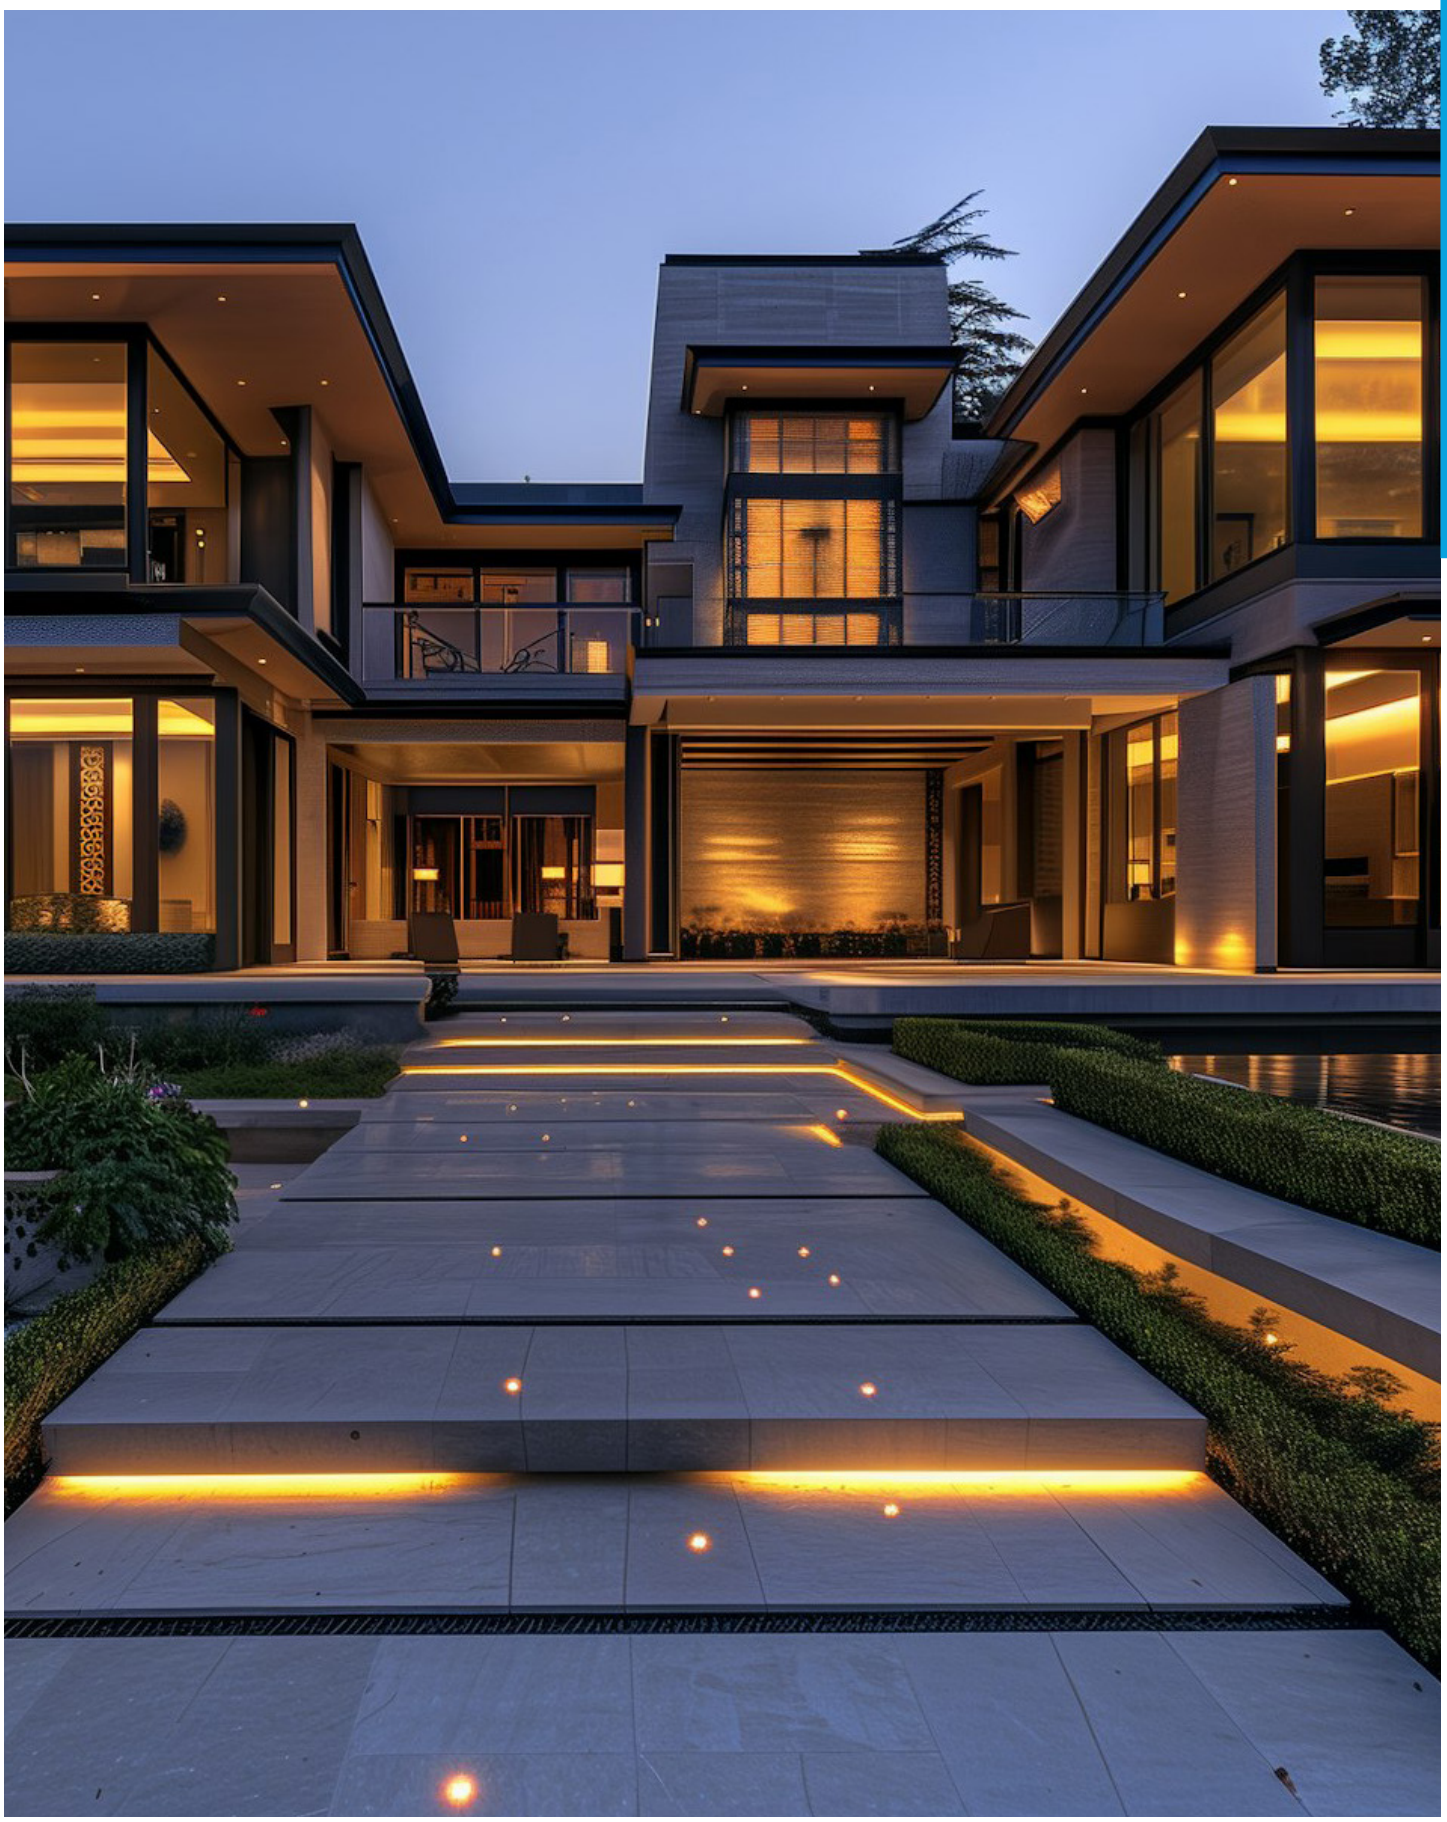

PERFIS DE ALUMÍNIO | ALUMINIUM PROFILES

SALIENTE | SURFACE





LP02

SALIENTE | SURFACE



12mm
WIDTH MAX.

138g/m
WEIGHT

200cm
LENGTH

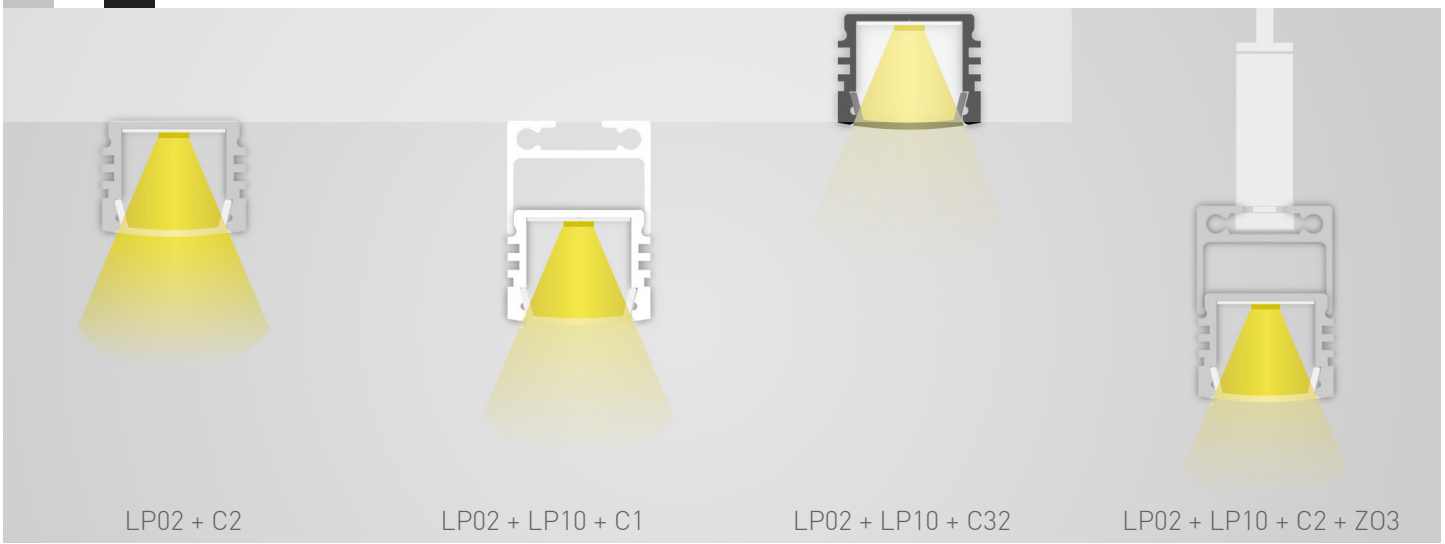

LP02 + C2 | LP02 + LP10 + C1 | LP02 + LP10 + C32 | LP02 + LP10 + C2 + ZO3

PERFIS | PROFILES

LP02	AL	G810-6022	
LP02	WH	G810-6023	●
LP02	BL	G810-6024	●

DIFUSORES | DIFFUSERS

C1	65%	G860-0004	
C2	85%	G860-0003	●
C58	75%	G860-0154	●
C32	25%	G860-0070	●

TOPOS | END CAPS

E4		G810-6125	
E4W		G810-6126	●
E4B		G810-6127	●
E5		G810-6020	
E5W		G810-6027	●
E5B		G810-6028	●
E6		G810-6115	

LUMINÁRIA LINEAR SUSPENSÃO | LINEAR SUSPENSION LUMINAIRE

LP10	AL	G810-7012	
LP10	WH	G810-7013	●
LP10	BL	G810-7014	●
BL1		G812-3334	
Z10		G830-1504	
Z11		G830-1505	
Z03		G830-1502	
Z03W		G830-1512	●
Z03B		G830-1511	●
Z05		G830-1501	

ACESSÓRIOS | ACCESSORIES

Z01	AL	G810-6210	
	WH	G810-6212	●
	BL	G810-6211	●
Z41	AL	G830-4029	
	WH	G830-4031	●
	BL	G830-4030	●
Z43	AL	G830-4035	
	WH	G830-4037	●
	BL	G830-4036	●
LP10.1	10cm	G810-1085	
	200cm	G810-1080	

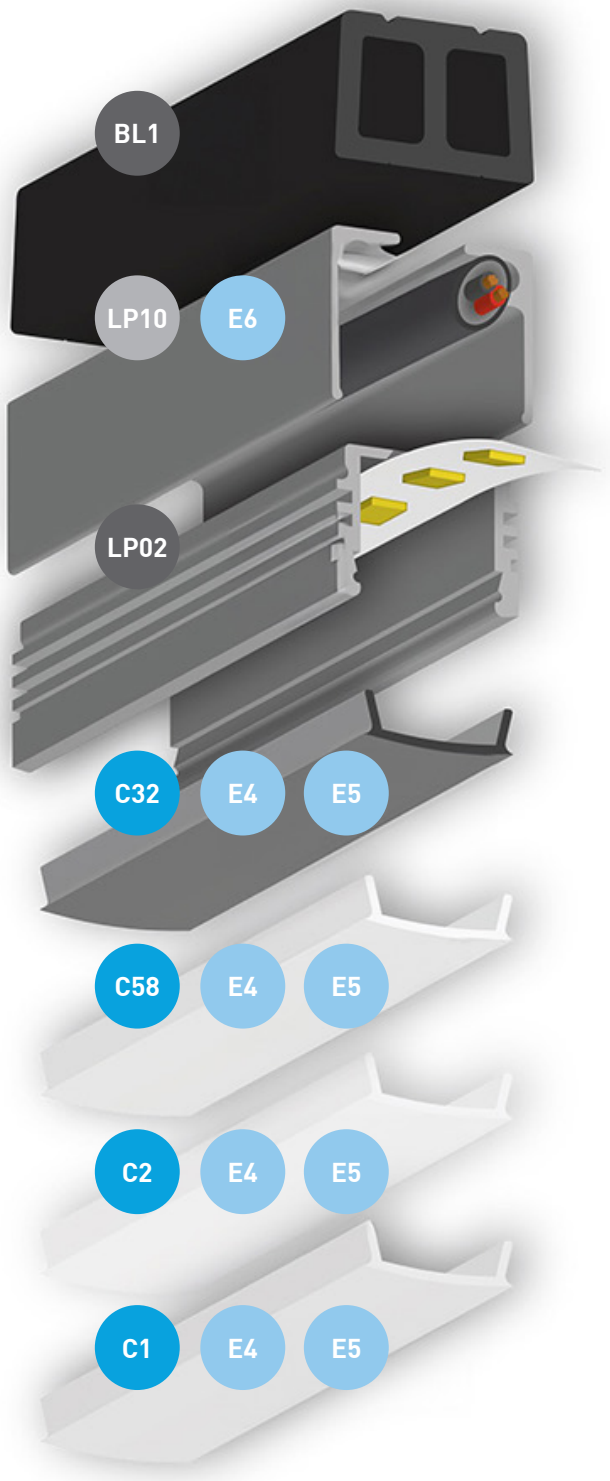



● Sob consulta | Under request

LP06

SALIENTE | SURFACE



12mm
WIDTH MAX.

100g/m
WEIGHT

200cm
LENGTH

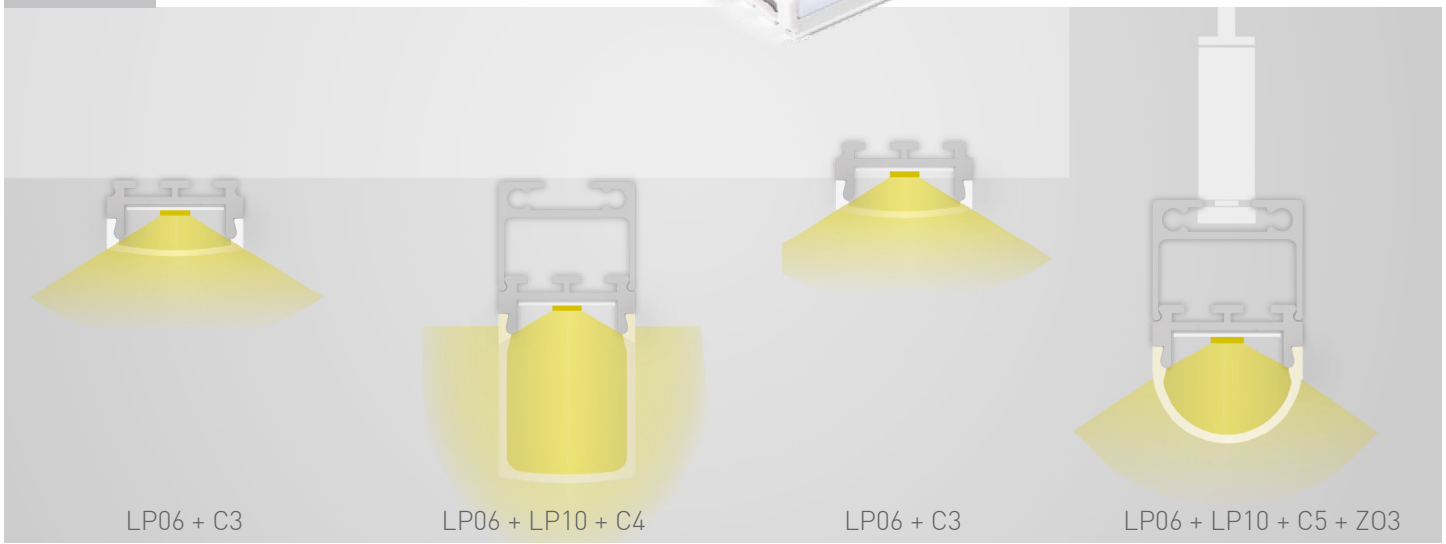

PERFIS | PROFILES			
LP06	AL	G810-6062	
DIFUSORES | DIFFUSERS			
C3	65%	G860-0005	
C4	65%	G860-0006	
C5	65%	G860-0007	
TOPOS | END CAPS			
E16	C4	G810-6068	
E17	C4	G810-6063	
E18	C4	G810-6064	
E19	C5	G810-6067	
E20	C5	G810-6168	
E21	C5	G810-6130	
LUMINÁRIA LINEAR SUSPENSÃO | LINEAR SUSPENSION LUMINAIRE			
Z10		G830-1504	
Z05		G830-1501	
Z03		G830-1502	
Z03W		G830-1512	●
Z03B		G830-1511	●
Z11		G830-1505	
ACESSÓRIOS | ACCESSORIES			
Z01	AL	G810-6210	
	WH	G810-6212	●
	BL	G810-6211	●
LP10.1	10cm	G810-1085	
	200cm	G810-1080	
Z12		G830-1506	
Z13		G830-1507	

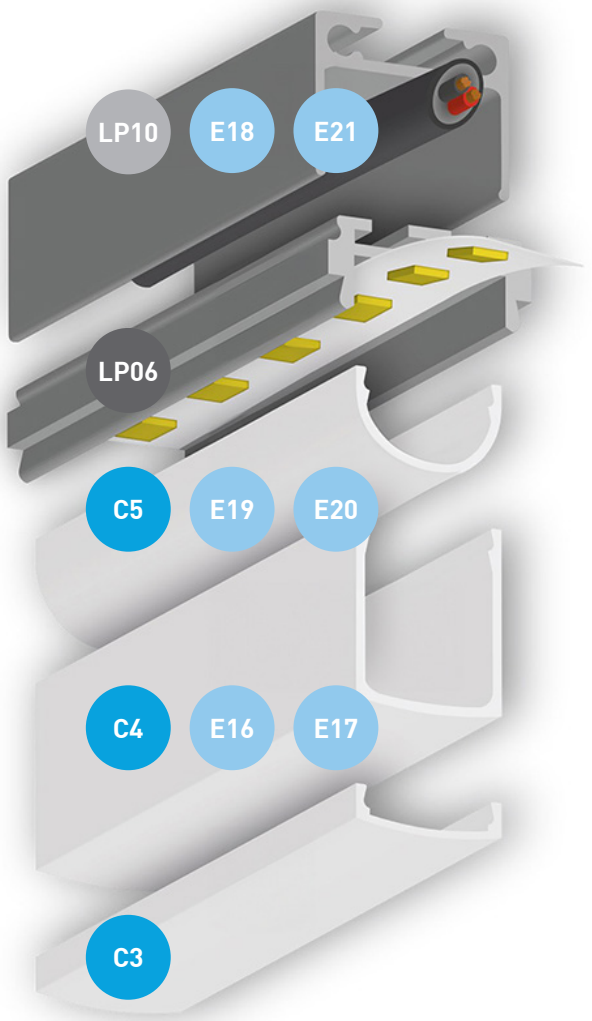



● Sob consulta | Under request

NP04

SALIENTE | SURFACE



24mm
WIDTH MAX.

225g/m
WEIGHT

200cm
LENGTH

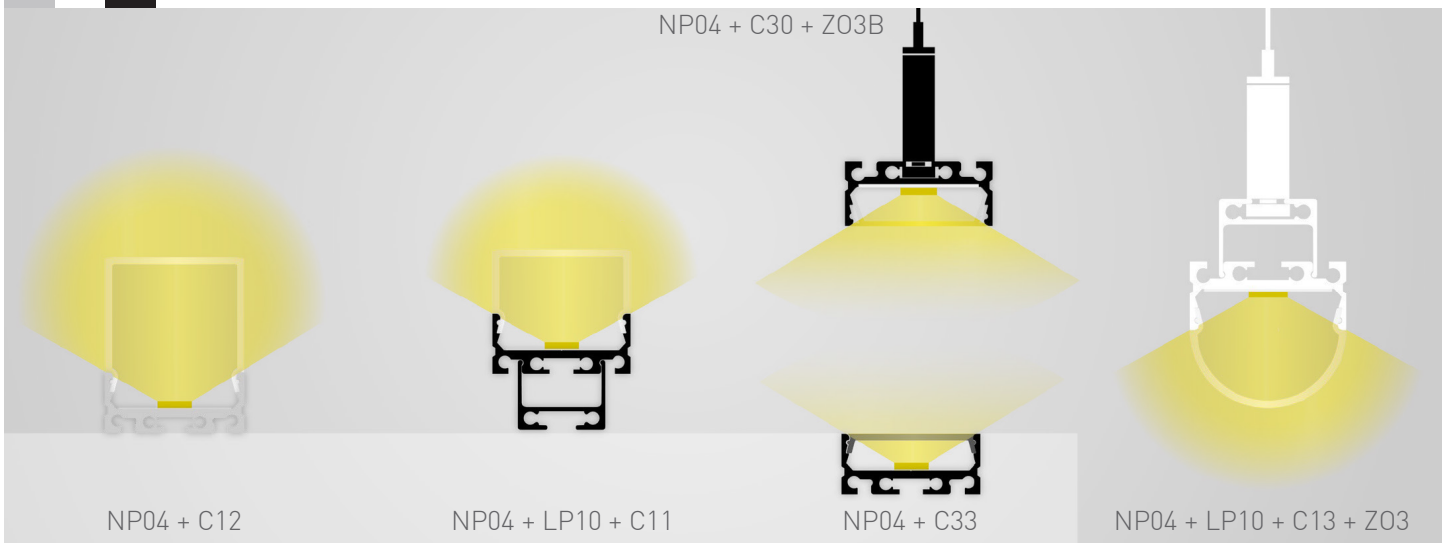

PERFIS DE ALUMÍNIO
ALUMINIUM PROFILES

PERFIS | PROFILES

NP04	AL	G820-1012	
NP04	WH	G820-1013	●
NP04	BL	G820-1014	●

DIFUSORES | DIFFUSERS

C30	65%	G860-0077	●
C47	75%	G860-0099	●
C10	65%	G860-0017	
C19	75%	G860-0036	●
C36	75%	G860-0078	●
C18	85%	G860-0035	●
C33	25%	G860-0072	●
C11	65%	G860-0018	
C35	85%	G860-0063	●
C12	65%	G860-0019	
C31	85%	G860-0068	●
C13	65%	G860-0020	

TOPOS | END CAPS

E43		G820-1011	
E43W		G820-1015	●
E43B		G820-1016	●
E44		G820-2011	
E44W		G820-2012	●
E44B		G820-2013	●
E45		G820-3011	
E45W		G820-3012	●
E45B		G820-3013	●
E46		G820-4011	
E46W		G820-4012	●
E46B		G820-4013	●

LUMINÁRIA LINEAR SUSPENSÃO | LINEAR SUSPENSION LUMINAIRE

LP10	AL	G810-7012	
LP10	WH	G810-7013	●
LP10	BL	G810-7014	●
Z10		G830-1504	
Z11		G830-1505	
Z03		G830-1502	
Z03W		G830-1512	●
Z03B		G830-1511	●
Z05		G830-1501	

ACESSÓRIOS | ACCESSORIES

LP10.1	10 cm	G810-1085	
LP10.1	200 cm	G810-1080	
Z24		G830-1510	
Z45		G830-1517	
Z46		G830-1518	
Z50		G812-3360	
Z03		G830-1502	
Z03W		G830-1512	●
Z03B		G830-1511	●
Z05		G830-1501	



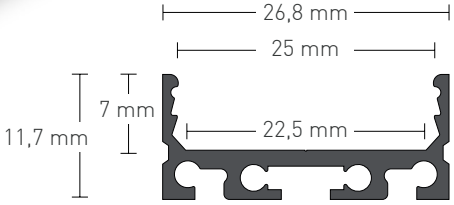

● Sob consulta | Under request

NP06 V2

SALIENTE | SURFACE



24mm
WIDTH MAX.

334g/m
WEIGHT

200cm
LENGTH

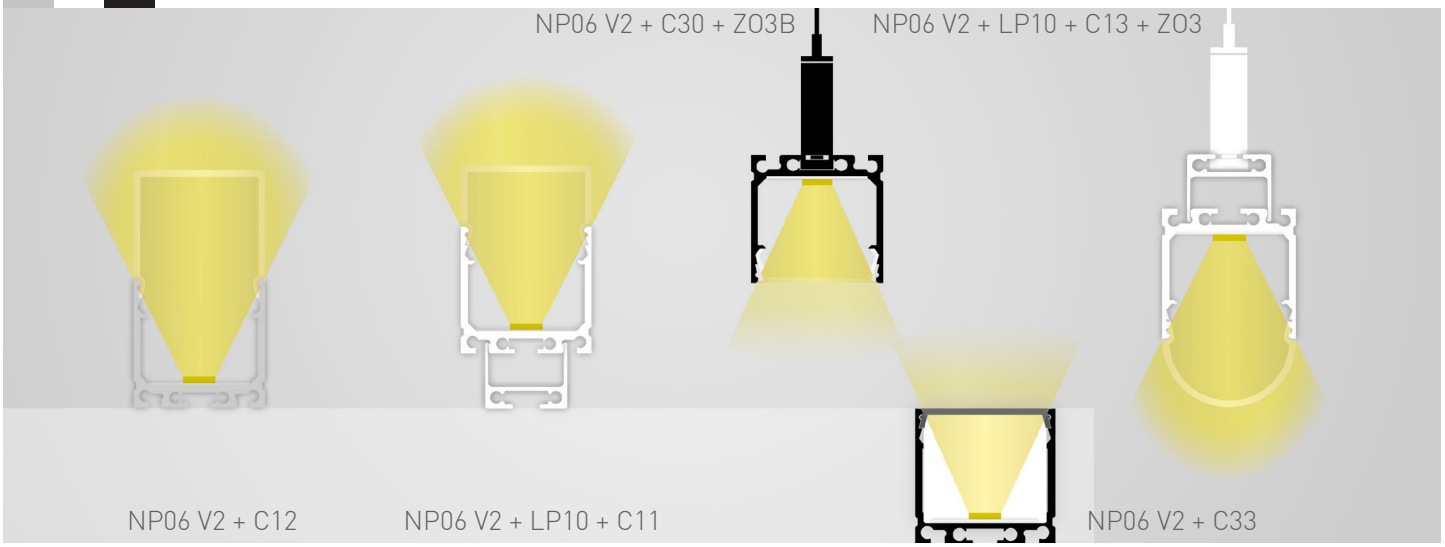

PERFIS DE ALUMÍNIO
ALUMINIUM PROFILES

PERFIS | PROFILES

NP06 V2	AL	G830-1017	
NP06 V2	WH	G830-1018	●
NP06 V2	BL	G830-1019	●

DIFUSORES | DIFFUSERS

C30	65%	G860-0077	●
C47	75%	G860-0099	●
C10	65%	G860-0017	
C19	75%	G860-0036	●
C36	75%	G860-0078	●
C18	85%	G860-0035	●
C33	25%	G860-0072	●
C11	65%	G860-0018	
C35	85%	G860-0063	●
C12	65%	G860-0019	
C31	85%	G860-0068	●
C13	65%	G860-0020	

TOPOS | END CAPS

E47		G830-1011	
E47W		G830-1015	●
E47B		G830-1016	●
E48		G830-2011	
E48W		G830-2012	●
E48B		G830-2013	●
E49		G830-3011	
E49W		G830-3012	●
E49B		G830-3013	●
E50		G830-4011	
E50W		G830-4012	●
E50B		G830-4013	●

LUMINÁRIA LINEAR SUSPENSÃO | LINEAR SUSPENSION LUMINAIRE

LP10	AL	G810-7012	
LP10	WH	G810-7013	●
LP10	BL	G810-7014	●
Z10		G830-1504	
Z11		G830-1505	
Z05		G830-1501	
Z03		G830-1502	
Z03W		G830-1512	●
Z03B		G830-1511	●

ACESSÓRIOS | ACCESSORIES

LP10.1	10 cm	G810-1085	
LP10.1	200 cm	G810-1080	
Z24		G830-1510	
Z45		G830-1517	
Z46		G830-1518	
Z50		G812-3360	
Z05		G830-1501	
Z03		G830-1502	
Z03W		G830-1512	●
Z03B		G830-1511	●

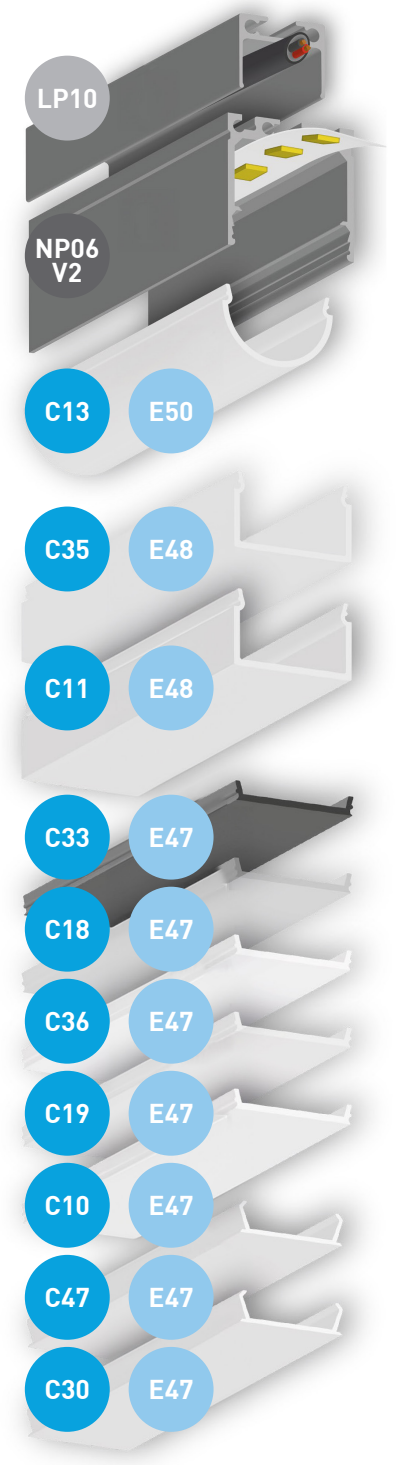

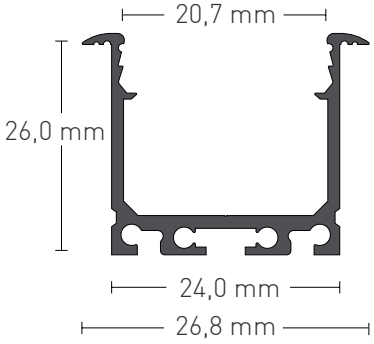

● Sob consulta | Under request

NP08

SALIENTE | SURFACE



16mm
WIDTH MAX.

188g/m
WEIGHT

200cm
LENGTH

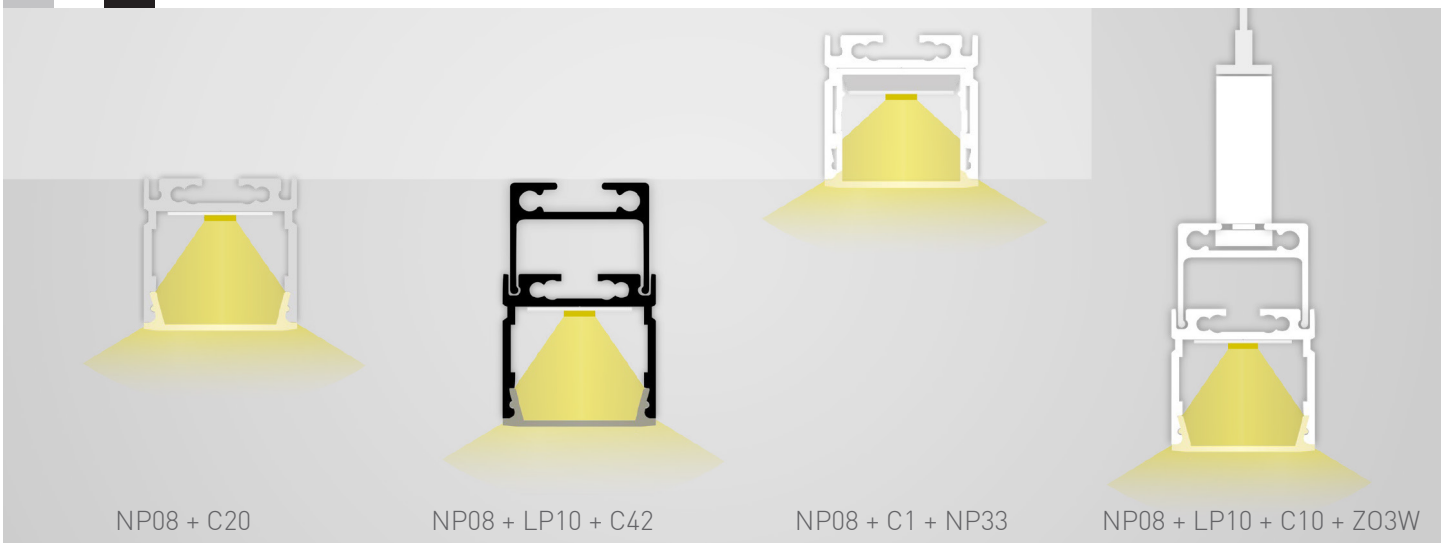

NP08 + C20

NP08 + LP10 + C42

NP08 + C1 + NP33

NP08 + LP10 + C10 + ZO3W

PERFIS | PROFILES

NP08	AL	G810-1020	
NP08	WH	G810-1021	●
NP08	BL	G810-1022	●

DIFUSORES | DIFFUSERS

C20	65%	G860-0048	
C42	25%	G860-0092	●
C21	65%	G860-0050	●

TOPOS | END CAPS

E58		G810-1027	
E58W	C20	G810-1023	●
E58B		G810-1019	●
E59		G810-1028	
E59W	C20	G810-1024	●
E59B		G810-1029	●
E56	C21	G810-1025	
E57	C21	G810-1026	

LUMINÁRIA LINEAR SUSPENSÃO | LINEAR SUSPENSION LUMINAIRE

LP10	AL	G810-7012	
LP10	WH	G810-7013	●
LP10	BL	G810-7014	●
Z10		G830-1504	
Z11		G830-1505	
Z03		G830-1502	
Z03W		G830-1512	●
Z03B		G830-1511	●
Z05		G830-1501	

ACESSÓRIOS | ACCESSORIES

LP10.1	10 cm	G810-1085	
LP10.1	200 cm	G810-1080	
Z34		G810-1010	
Z10		G830-1504	
Z11		G830-1505	
Z50		G812-3360	

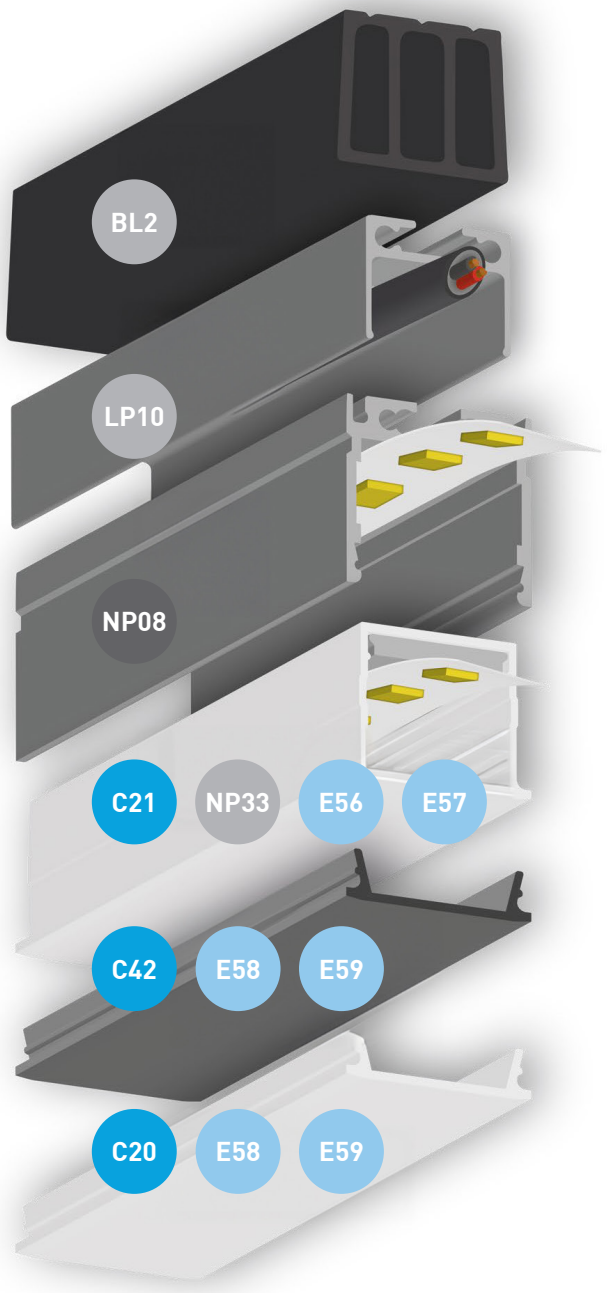

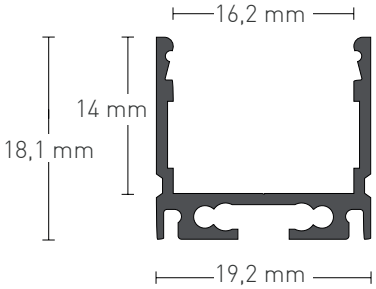

● Sob consulta | Under request

NP17 V2

SALIENTE | SURFACE



30mm
WIDTH MAX.

KG
1035g/m
WEIGHT

200cm
LENGTH

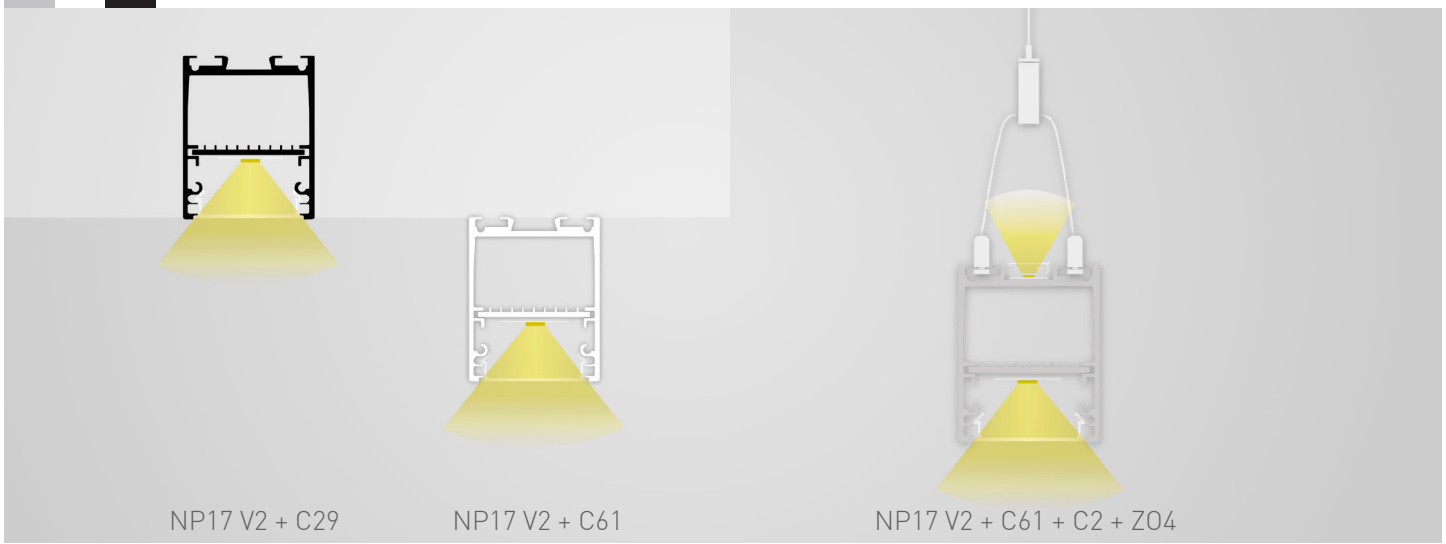

NP17 V2 + C29

NP17 V2 + C61

NP17 V2 + C61 + C2 + ZO4

PERFIS | PROFILES			
NP17 V2	AL	G812-3363	
NP17 V2	WH	G812-3365	●
NP17 V2	BL	G812-3364	●
DIFUSORES | DIFFUSERS			
C29	65%	G860-0059	
C1	65%	G860-0004	
C2	80%	G860-0003	●
C58	75%	G860-0154	●
C61	80%	G812-3342	●
TOPOS | END CAPS			
E69		G810-2027	
E69W		G810-2024	●
E69B		G810-2023	●
E114		G812-3353	
E114W		G812-3355	●
E114B		G812-3354	●
E116		G812-3369	
E116W		G812-3371	●
E116B		G812-3370	●
ACESSÓRIOS | ACCESSORIES			
Z25		G830-1513	
Z26		G830-1514	
Z27		G830-1515	
Z50		G812-3360	
Z04		G812-3372	

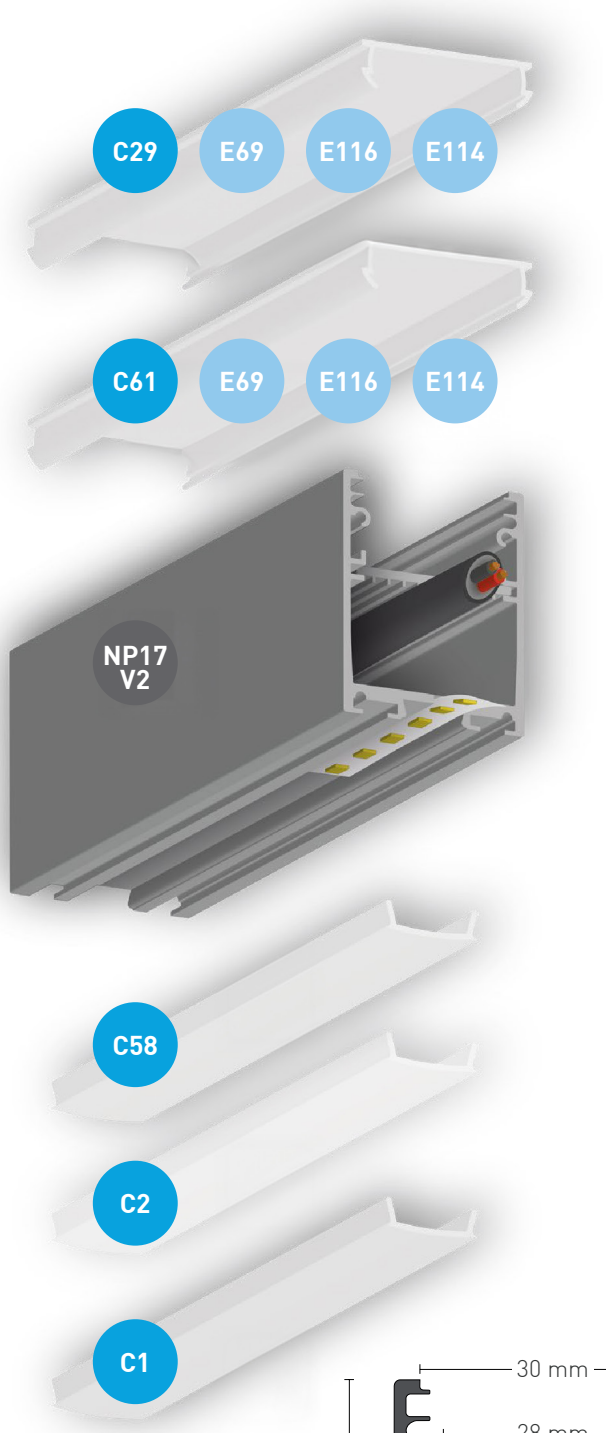

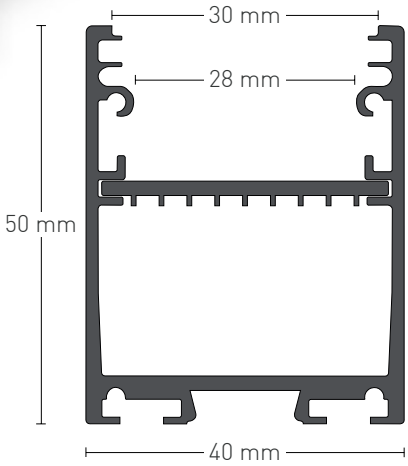

● Sob consulta | Under request

NP20 V2

SALIENTE | SURFACE



20mm
WIDTH MAX.

KG
210g/m
WEIGHT

200cm
LENGTH

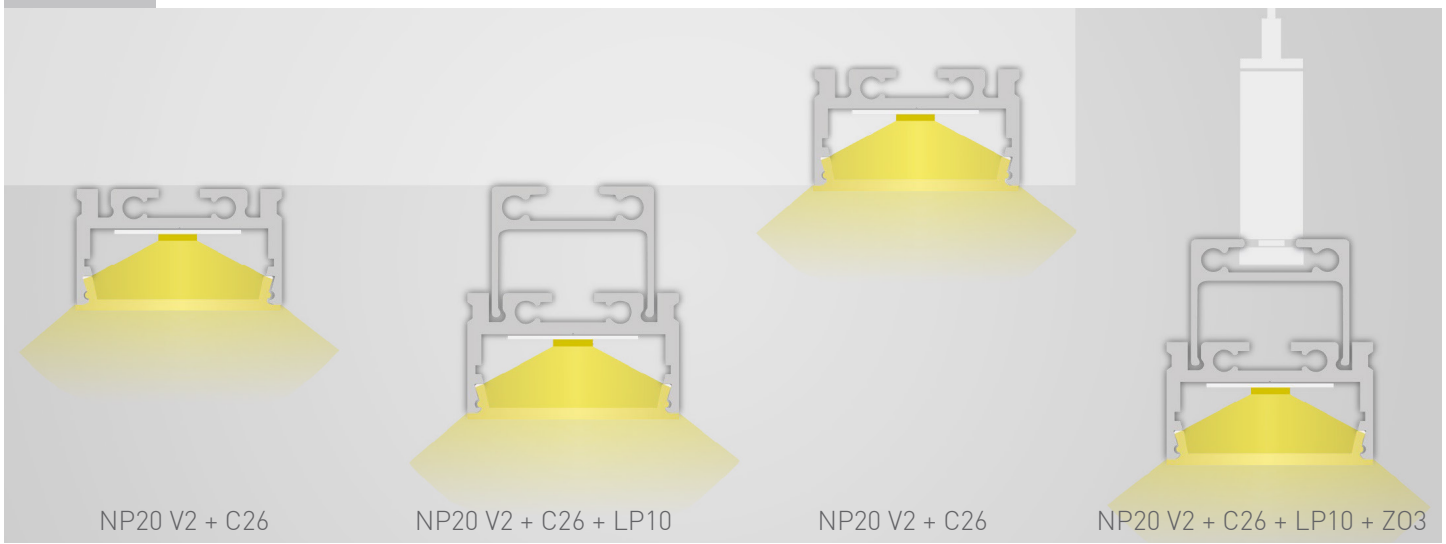

NP20 V2 + C26

NP20 V2 + C26 + LP10

NP20 V2 + C26

NP20 V2 + C26 + LP10 + ZO3

PERFIS | PROFILES		
NP20 V2	AL	G810-2210
DIFUSORES | DIFFUSERS		
C26	65%	G860-0111
TOPOS | END CAPS		
E71		G810-2012
LUMINÁRIA LINEAR SUSPENSÃO | LINEAR SUSPENSION LUMINAIRE		
LP10	AL	G810-7012
Z10		G830-1504
Z11		G830-1505
Z03		G830-1502
Z05		G830-1501
ACESSÓRIOS | ACCESSORIES		
LP10.1	10 cm	G810-1085
LP10.1	200 cm	G810-1080
Z48		G830-1519
Z49		G830-1520
Z21		G810-2015

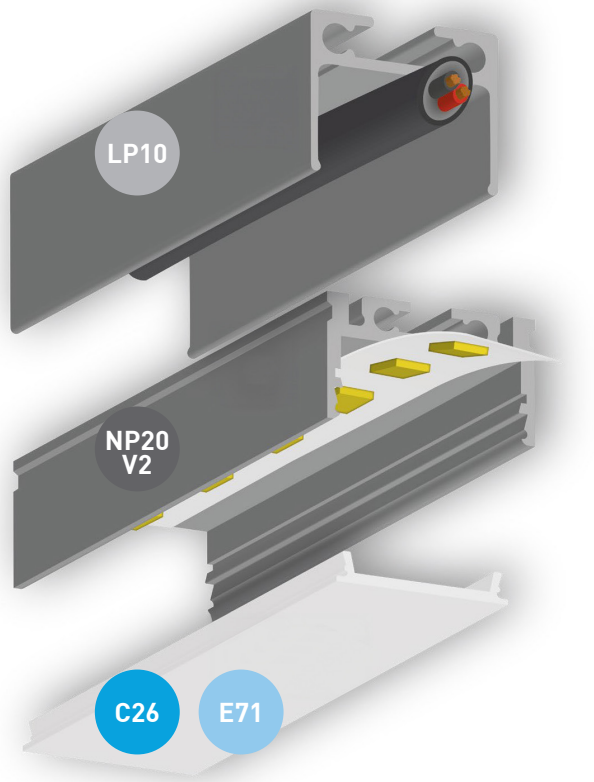

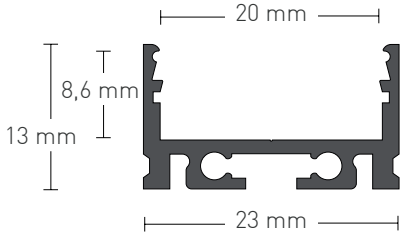

OP13

SALIENTE | SURFACE

FLEXIBLE

15mm
WIDTH MAX.

44g/m
WEIGHT

200cm
LENGTH

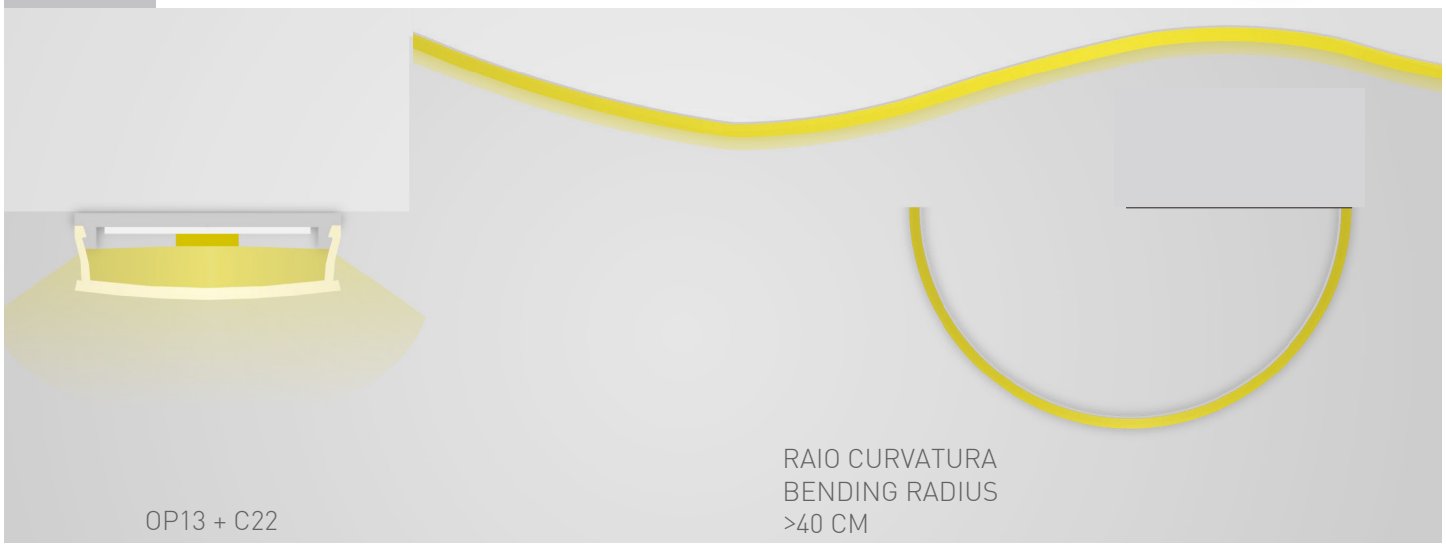

OP13 + C22

RAIO CURVATURA
BENDING RADIUS
>40 CM

	PERFIS | PROFILES	
OP13	AL	G810-1030
	DIFUSORES | DIFFUSERS	
C22	65%	G860-0054
	TOPOS | END CAPS	
E60		G810-1035
E61		G810-1036
	ACESSÓRIOS | ACCESSORIES	
Z19		G810-1037

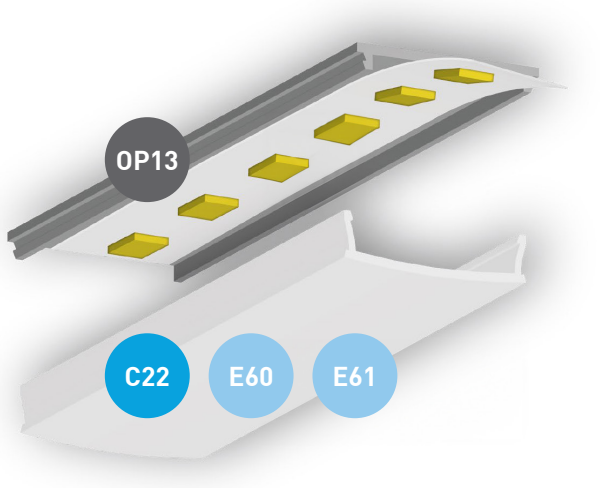

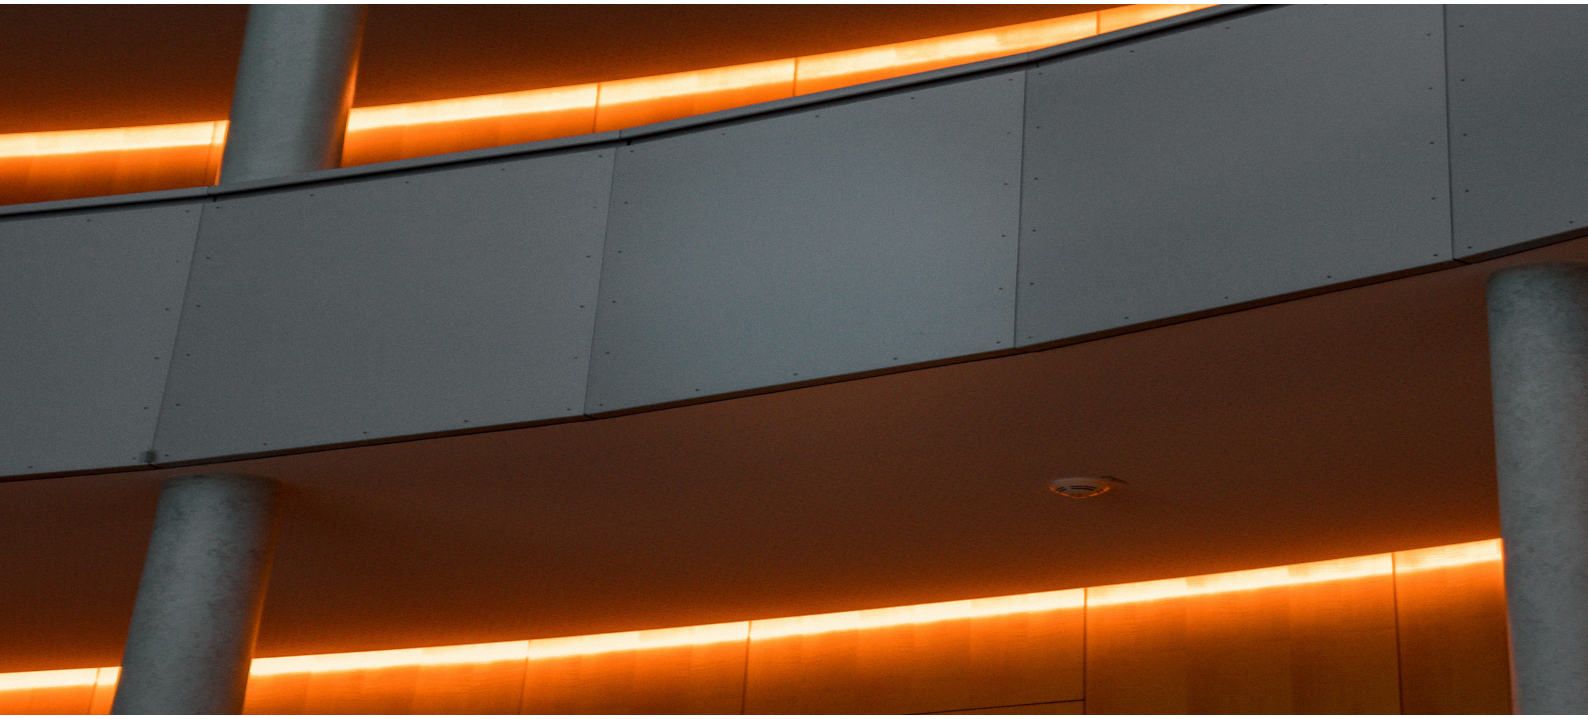



OP14

SALIENTE | SURFACE



FLEXIBLE

12mm
WIDTH MAX.

200cm
LENGTH

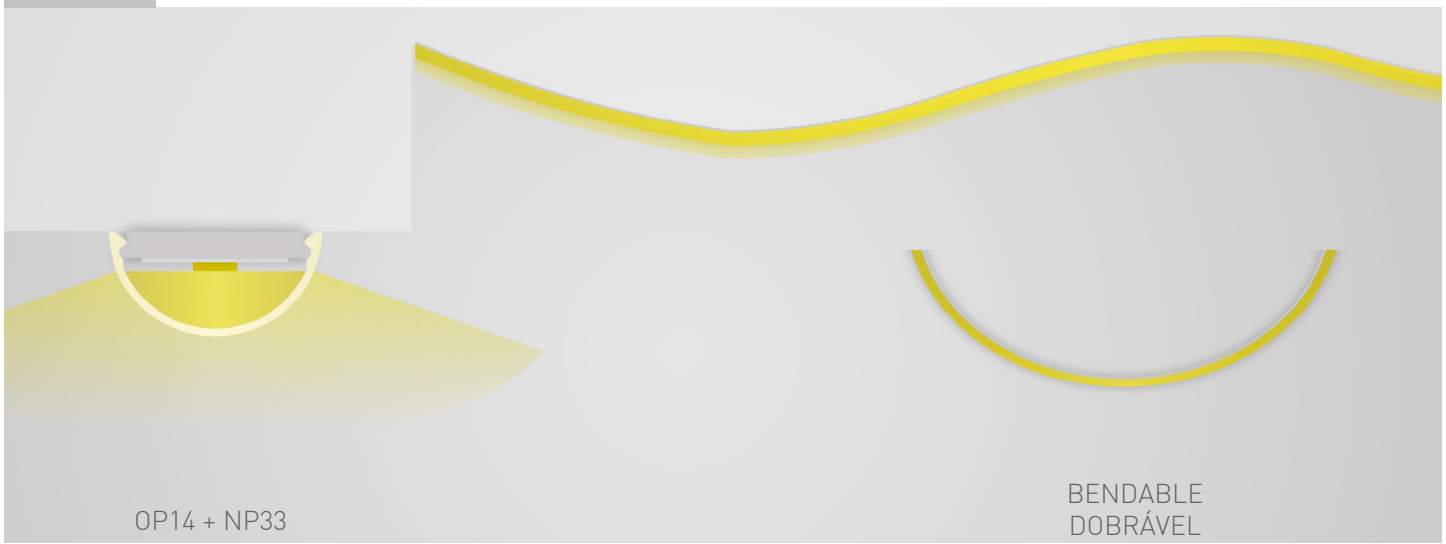

OP14 + NP33

BENDABLE
DOBRÁVEL

	PERFIS | PROFILES	
NP33	AL	G810-5050
	DIFUSORES | DIFFUSERS	
OP14	65%	G860-0045
	TOPOS | END CAPS	
E73		G810-1045
E70		G810-1046

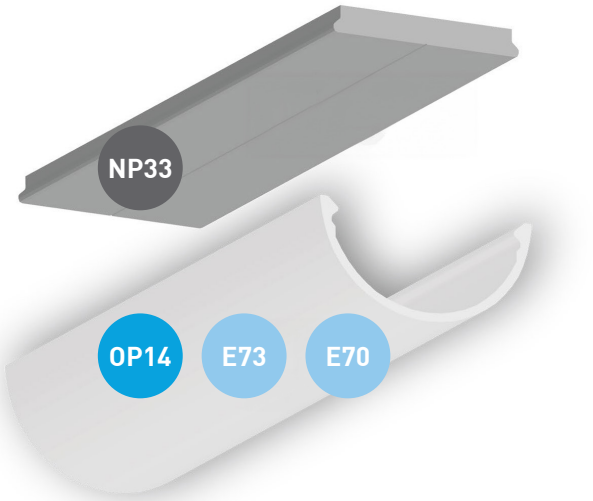



NP33



OP14



OP14 + NP33



OP16

SALIENTE | SURFACE



8mm
WIDTH MAX.

60g/m
WEIGHT

200cm
LENGTH

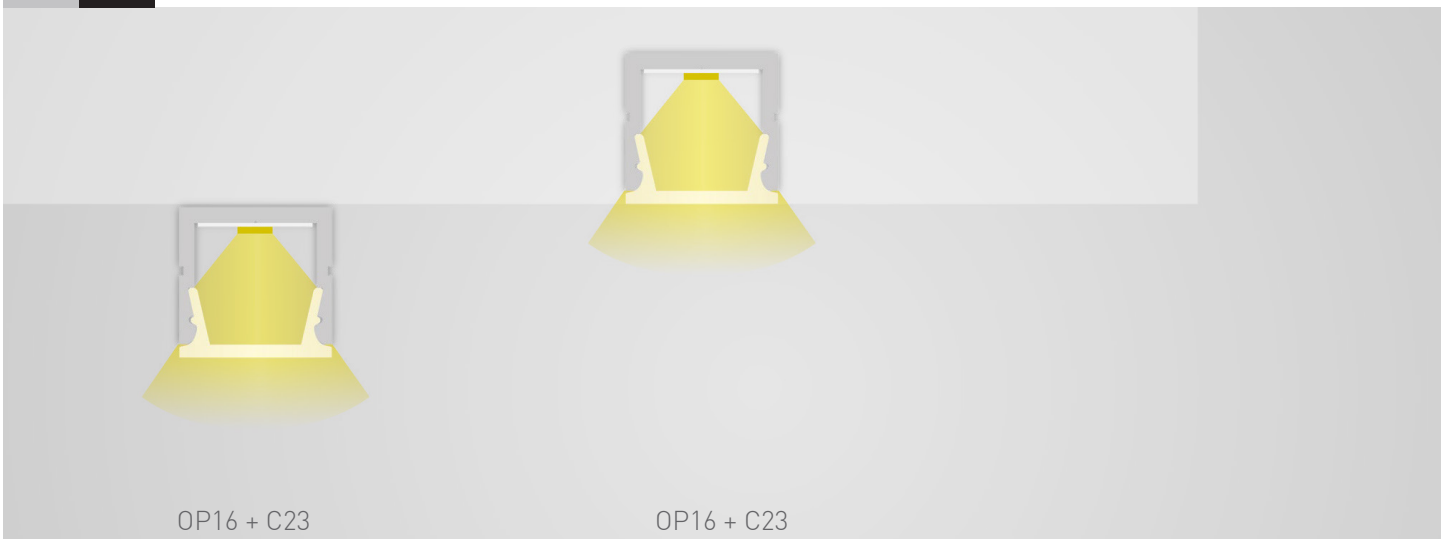

OP16 + C23

OP16 + C23

	PERFIS | PROFILES		
OP16	AL	G810-1050	
OP16	BL	G810-1051	●
	DIFUSORES | DIFFUSERS		
C23	65%	G860-0046	
C34	25%	G860-0074	●
	TOPOS | END CAPS		
E62		G810-1055	
E63		G810-1056	
	ACESSÓRIOS | ACCESSORIES		
Z20		G810-1057	

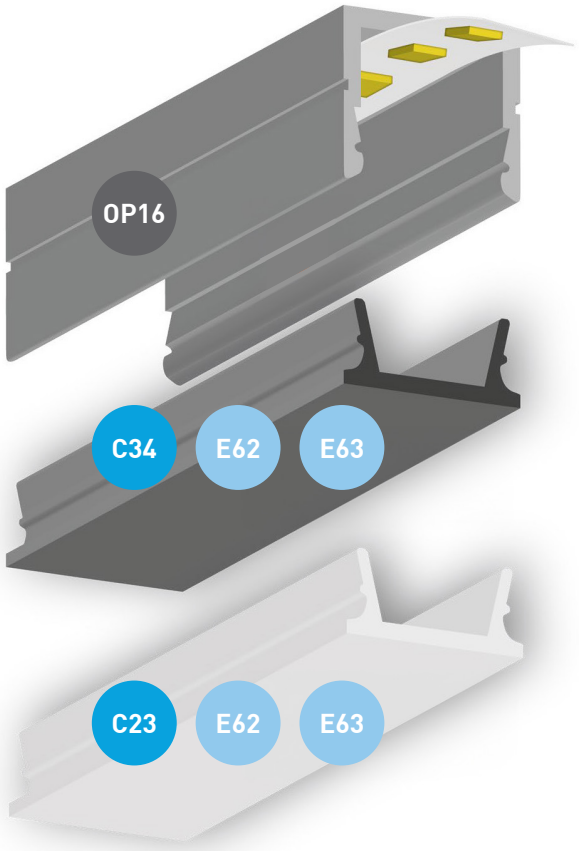



● Sob consulta | Under request

OP17

SALIENTE | SURFACE



11mm
WIDTH MAX.

117g/m
WEIGHT

200cm
LENGTH

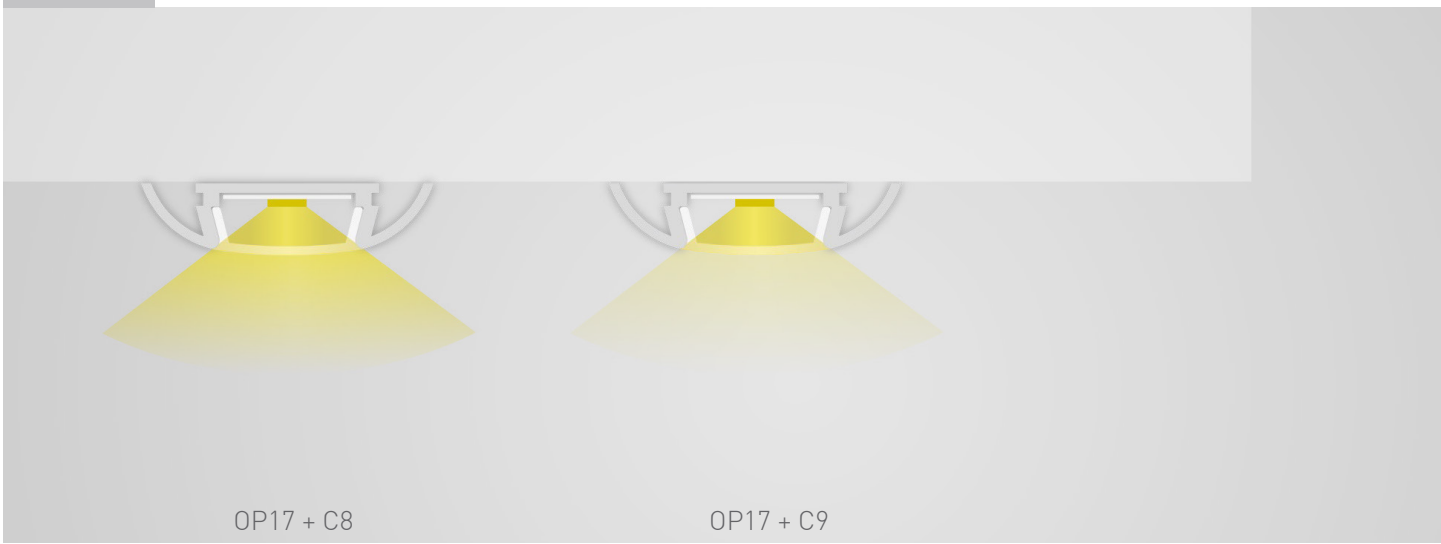

OP17 + C8

OP17 + C9

	PERFIS | PROFILES		
OP17	AL	G810-3082	
	DIFUSORES | DIFFUSERS		
C8	65%	G860-0013	
C9	85%	G860-0012	●
C52	25%	G860-0109	●
	TOPOS | END CAPS		
E39 		G810-2080	
E40 		G810-2082	

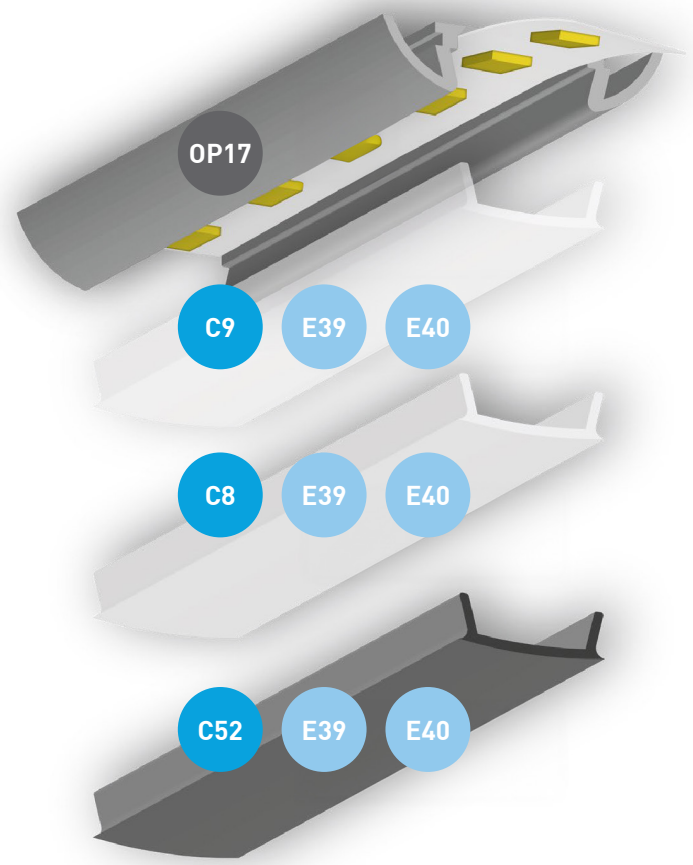

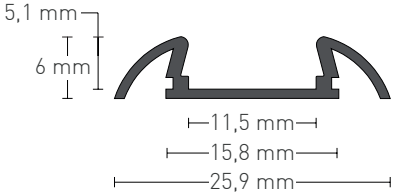

● Sob consulta | Under request

OP18

SALIENTE | SURFACE



6mm
WIDTH MAX.

KG
45g/m
WEIGHT

200cm
LENGTH



OP18 + C24

	PERFIS | PROFILES		
OP18	AL	G810-1060	
OP18	BL	G810-1062	●
	DIFUSORES | DIFFUSERS		
C24	65%	G860-0106	
	TOPOS | END CAPS		
E64		G810-1065	
E65		G810-1066	

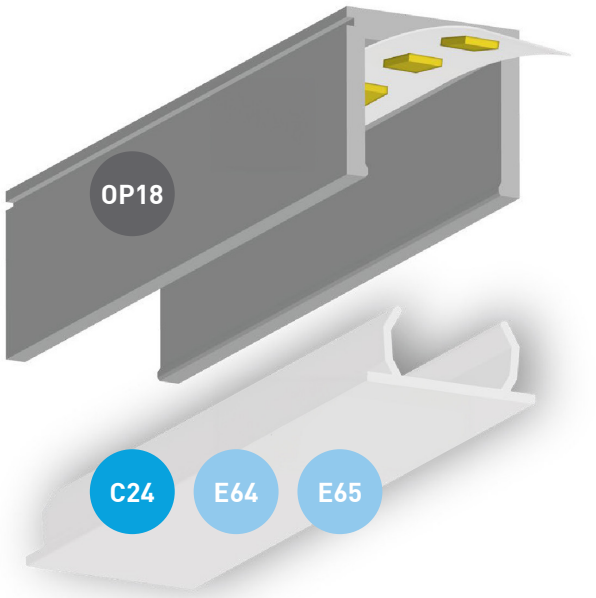





● Sob consulta | Under request

TRIX

SALIENTE | SURFACE



12mm
WIDTH MAX.

93g/m
WEIGHT

200cm
LENGTH





TRIX + C0

TRIX + C0 + E0

TRIX	PERFIS | PROFILES	
	AL	8010-2002
C0	DIFUSORES | DIFFUSERS	
		8080-2007
E0	TOPOS | END CAPS	
		8080-0004
Z00	ACESSÓRIOS | ACCESSORIES	
		8080-0006

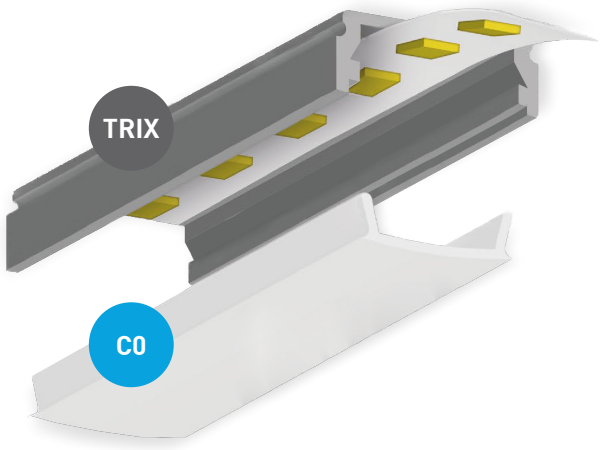





PERFIS DE ALUMÍNIO | ALUMINIUM PROFILES

ENCASTRAR | RECESSED





IP03 V2

ENCASTRAR | RECESSED



13mm
WIDTH MAX.

329g/m
WEIGHT

200cm
LENGTH

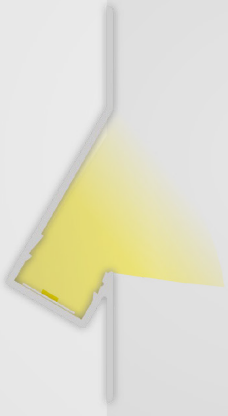

IP03 V2

	PERFIS | PROFILES	
IP03 V2	AL	G810-8001
	DIFUSORES | DIFFUSERS	
C56	65%	G860-0133

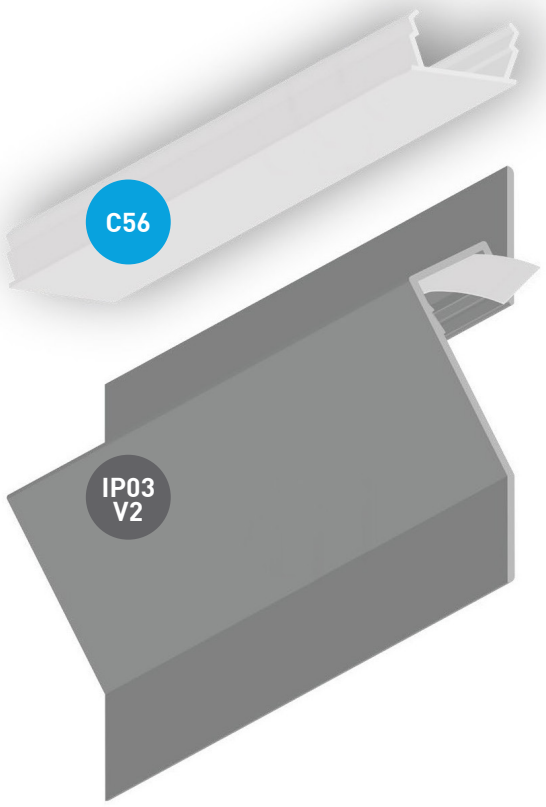

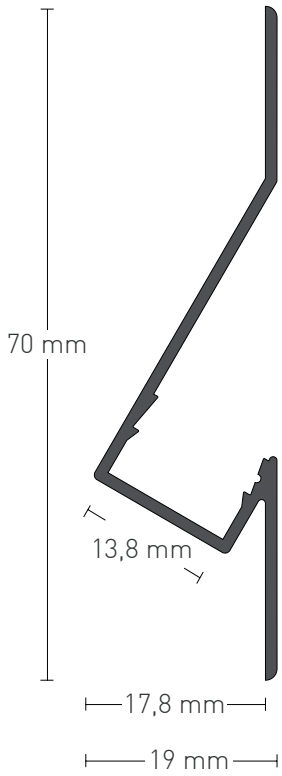

LP03

ENCASTRAR | RECESSED



12mm
WIDTH MAX.

KG
140g/m
WEIGHT

200cm
LENGTH

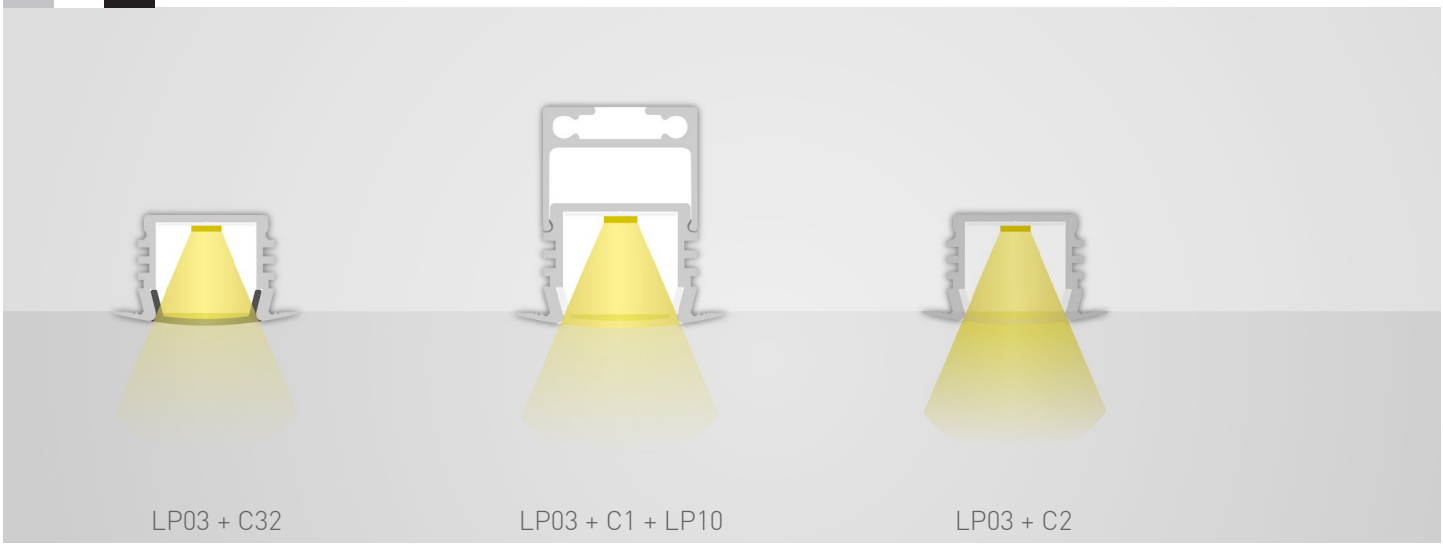

LP03 + C32

LP03 + C1 + LP10

LP03 + C2

PERFIS | PROFILES			
LP03	AL	G810-6032	
LP03	WH	G810-6034	●
LP03	BL	G810-6033	●
DIFUSORES | DIFFUSERS			
C1	65%	G860-0004	
C2	85%	G860-0003	●
C58	75%	G860-0154	●
C32	25%	G860-0070	●
TOPOS | END CAPS			
E7		G810-6135	
E7W		G812-3204	●
E7B		G812-3203	●
E8		G810-6030	
E8W		G812-3206	●
E8B		G812-3205	●
E9		G810-6120	
LUMINÁRIA LINEAR SUSPENSÃO | LINEAR SUSPENSION LUMINAIRE			
LP10		G810-7012	
BL1		G812-3334	
Z10		G830-1504	
Z11		G830-1505	
Z03		G830-1502	
Z03W		G830-1512	●
Z03B		G830-1511	●
Z05		G830-1501	
ACESSÓRIOS | ACCESSORIES			
Z01		G810-6210	
LP10.1	10cm	G810-1085	
	200cm	G810-1080	

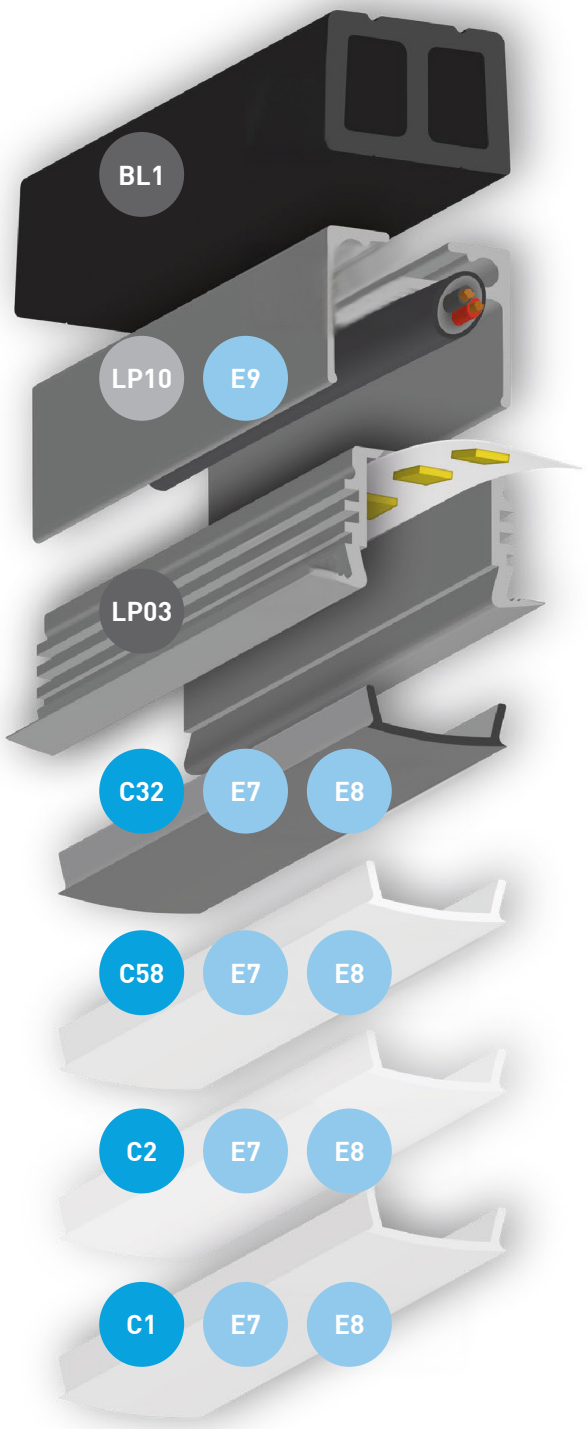

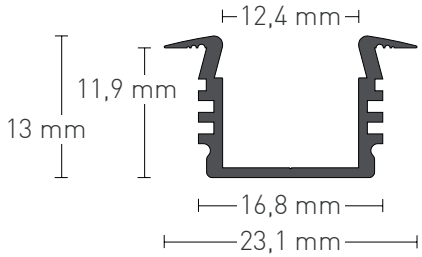

● Sob consulta | Under request

LP08

ENCASTRAR | RECESSED





12mm
WIDTH MAX.

82g/m
WEIGHT

200cm
LENGTH



LP08 + C2 | LP08 + LP10 + C32 | LP08 + C1

	PERFIS | PROFILES		
LP08	AL	G810-6082	
LP08	WH	G810-6088	●
LP08	BL	G810-6089	●
	DIFUSORES | DIFFUSERS		
C1	65%	G860-0004	
C2	85%	G860-0003	●
C58	75%	G860-0154	●
C32	25%	G860-0070	●
	TOPOS | END CAPS		
E25		G810-6085	
E25W		G810-6086	●
E25B		G810-6087	●
E26		G810-6080	
E26W		G810-6083	●
E26B		G810-6084	●
E27		G810-6045	
	LUMINÁRIA LINEAR SUSPENSÃO | LINEAR SUSPENSION LUMINAIRE		
LP10	AL	G810-7012	
	WH	G810-7013	●
	BL	G810-7014	●
Z10		G830-1504	
Z11		G830-1505	
	ACESSÓRIOS | ACCESSORIES		
Z01	AL	G810-6210	
	WH	G810-6212	●
	BL	G810-6211	●
LP10.1	10cm	G810-1085	
	200cm	G810-1080	

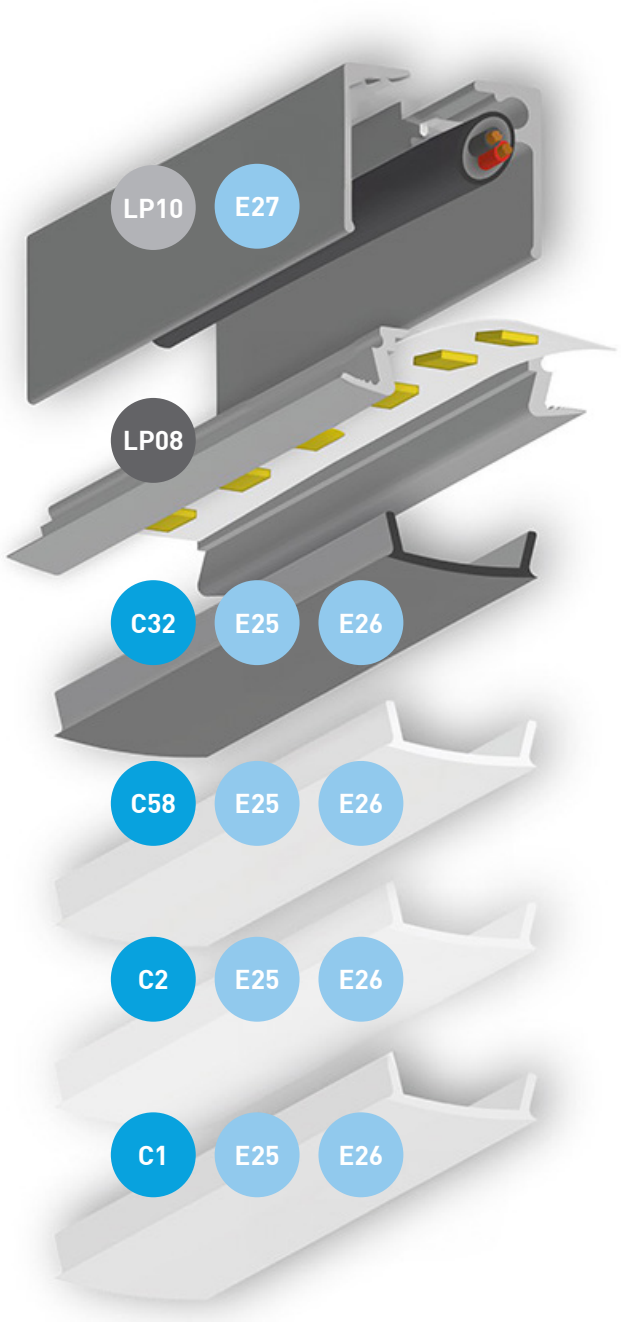

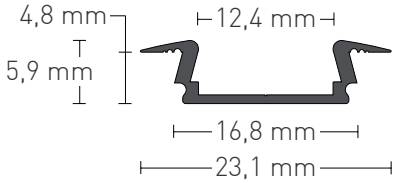

● Sob consulta | Under request

NP05

ENCASTRAR | RECESSED



22mm
WIDTH MAX.

236g/m
WEIGHT

200cm
LENGTH

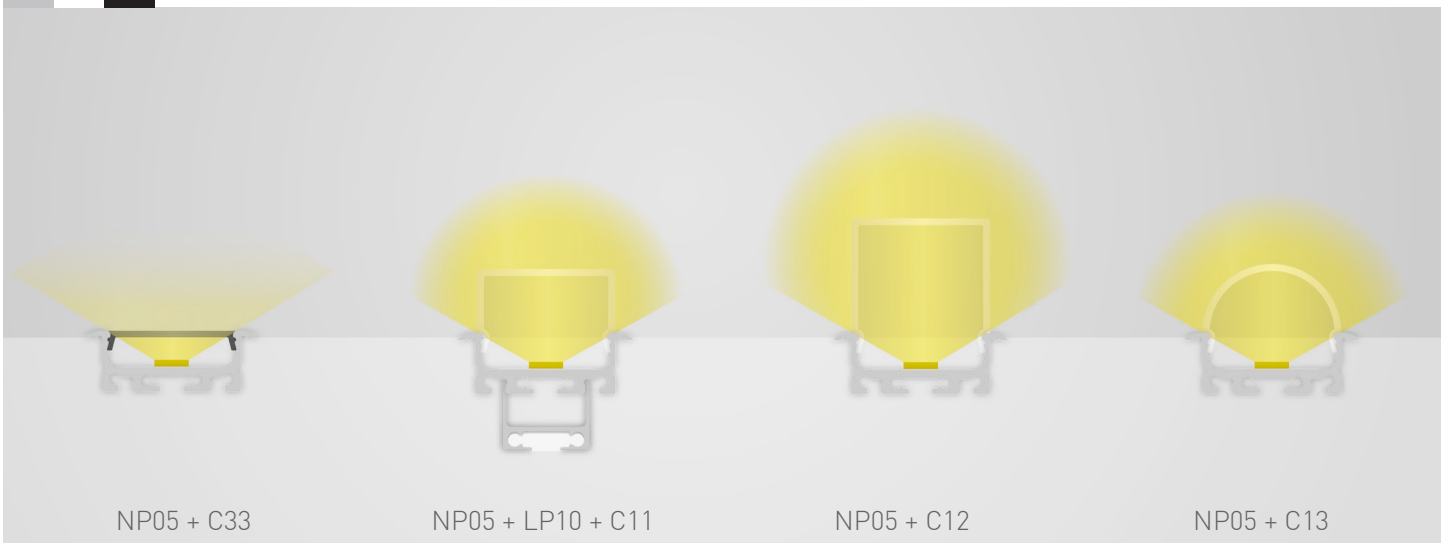

NP05 + C33 | NP05 + LP10 + C11 | NP05 + C12 | NP05 + C13

PERFIS | PROFILES			
NP05	AL	G820-6012	
NP05	WH	G820-6014	●
NP05	BL	G820-6013	●
DIFUSORES | DIFFUSERS			
C30	65%	G860-0077	●
C47	75%	G860-0099	●
C10	65%	G860-0017	
C19	75%	G860-0036	●
C36	75%	G860-0078	●
C18	85%	G860-0035	●
C33	25%	G860-0072	●
C11	65%	G860-0018	
C35	85%	G860-0063	●
C12	65%	G860-0019	
C31	85%	G860-0068	●
C13	65%	G860-0020	
TOPOS | END CAPS			
E43		G820-1011	
E43W		G820-1015	●
E43B		G820-1016	●
E44		G820-2011	
E44W		G820-2012	●
E44B		G820-2013	●
E45		G820-3011	
E45W		G820-3012	●
E45B		G820-3013	●
E46		G820-4011	
E46W		G820-4012	●
E46B		G820-4013	●
LUMINÁRIA LINEAR SUSPENSÃO | LINEAR SUSPENSION LUMINAIRE			
LP10	AL	G810-7012	
	WH	G810-7013	●
	BL	G810-7014	●
Z10		G830-1504	
Z11		G830-1505	
ACESSÓRIOS | ACCESSORIES			
LP10.1	10 cm	G810-1085	
LP10.1	200 cm	G810-1080	
Z24		G830-1510	
Z45		G830-1517	
Z46		G830-1518	
Z44		G830-4038	

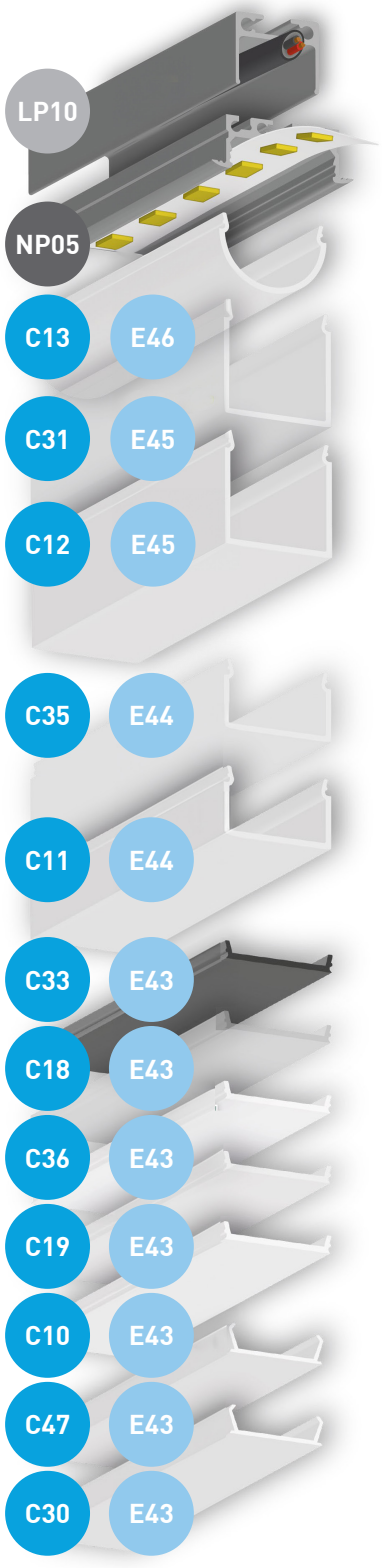

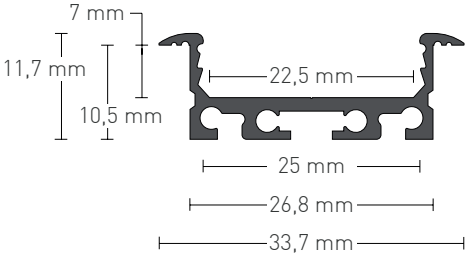

● Sob consulta | Under request

NP07 V2

ENCASTRAR | RECESSED



20mm
WIDTH MAX.

352g/m
WEIGHT

200cm
LENGTH

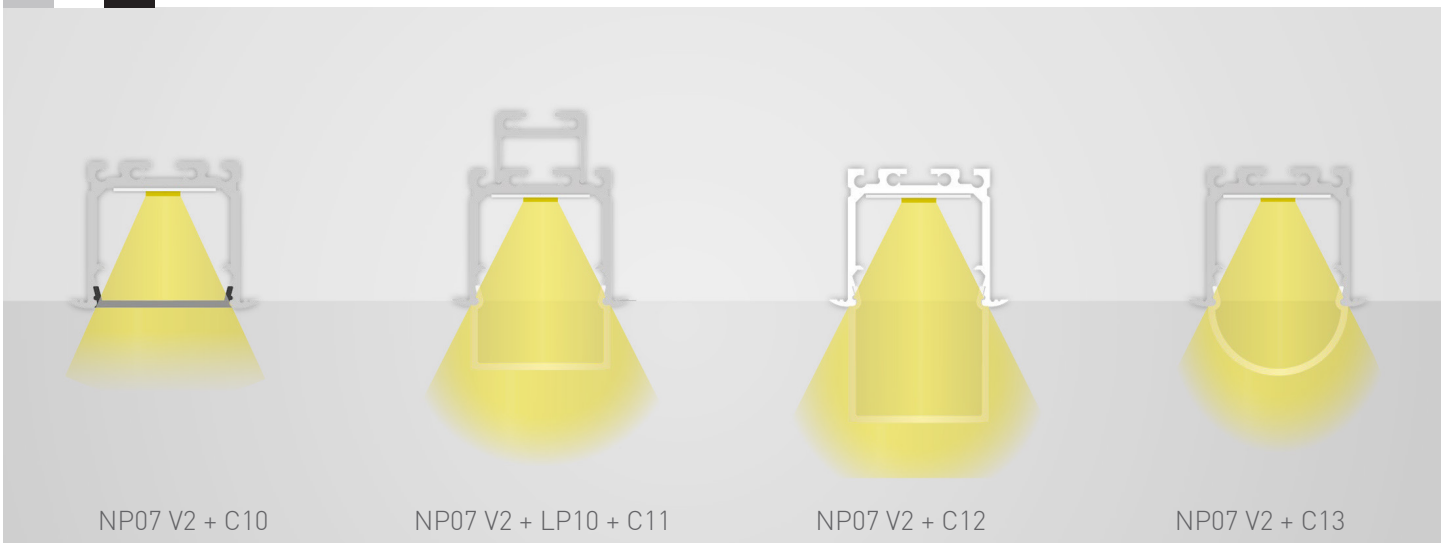

NP07 V2 + C10 | NP07 V2 + LP10 + C11 | NP07 V2 + C12 | NP07 V2 + C13

PERFIS | PROFILES

NP07 V2	AL	G830-5015	
NP07 V2	WH	G830-5016	●
NP07 V2	BL	G830-5017	●

DIFUSORES | DIFFUSERS

C30	65%	G860-0077	●
C47	75%	G860-0099	●
C10	65%	G860-0017	
C19	75%	G860-0036	●
C36	75%	G860-0078	●
C18	85%	G860-0035	●
C33	25%	G860-0072	●
C11	65%	G860-0018	
C35	85%	G860-0063	●
C12	65%	G860-0019	
C31	85%	G860-0068	●
C13	65%	G860-0020	

TOPOS | END CAPS

E47	G830-1011	
E47W	G830-1015	●
E47B	G830-1016	●
E48	G830-2011	
E48W	G830-2012	●
E48B	G830-2013	●
E49	G830-3011	
E49W	G830-3012	●
E49B	G830-3013	●
E50	G830-4011	
E50W	G830-4012	●
E50B	G830-4013	●

LUMINÁRIA LINEAR SUSPENSÃO | LINEAR SUSPENSION LUMINAIRE

LP10	AL	G810-7012	
	WH	G810-7013	●
	BL	G810-7014	●
Z10		G830-1504	
Z11		G830-1505	

ACESSÓRIOS | ACCESSORIES

LP10.1	10 cm	G810-1085
LP10.1	200 cm	G810-1080
Z24		G830-1510
Z45		G830-1517
Z46		G830-1518
Z44		G830-4038



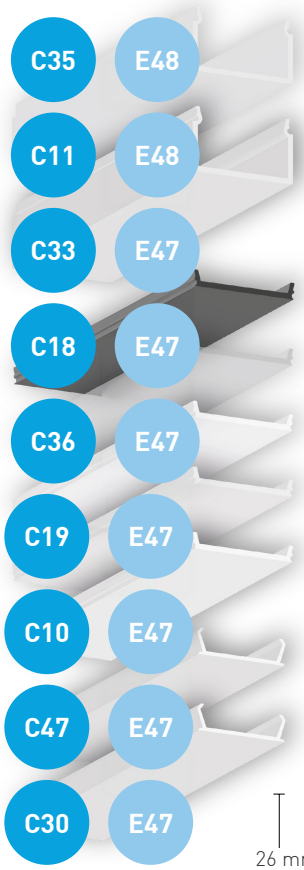

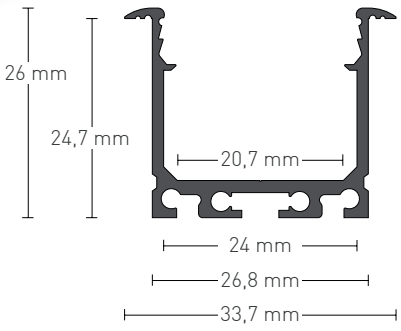

● Sob consulta | Under request

NP21

ENCASTRAR | RECESSED



20mm
WIDTH MAX.

300g/m
WEIGHT

200cm
LENGTH

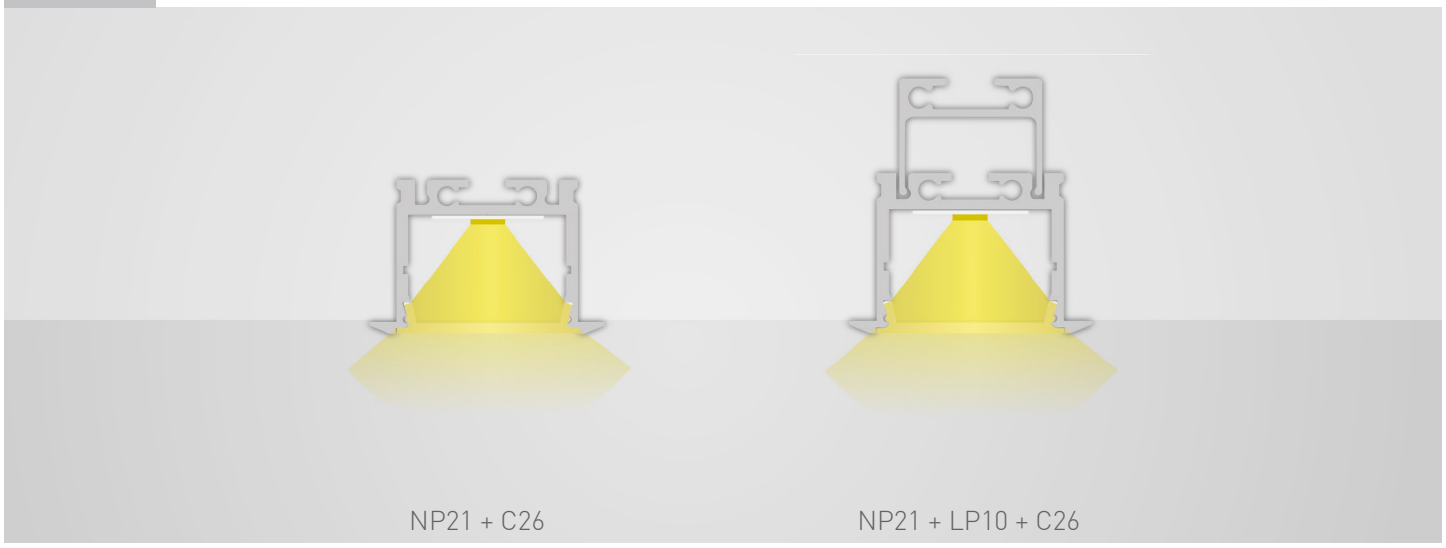

NP21 + C26

NP21 + LP10 + C26

	PERFIS | PROFILES	
NP21	AL	**G810-2211**
	DIFUSORES | DIFFUSERS	
C26	65%	**G860-0111**
	TOPOS | END CAPS	
E72		**G810-2013**
	LUMINÁRIA LINEAR SUSPENSÃO | LINEAR SUSPENSION LUMINAIRE	
LP10	AL	**G810-7012**
Z10		**G830-1504**
Z11		**G830-1505**
	ACESSÓRIOS | ACCESSORIES	
LP10.1	10 cm	**G810-1085**
LP10.1	200 cm	**G810-1080**
Z48		**G830-1519**
Z49		**G830-1520**
Z21		**G810-2015**
Z44		**G830-4038**

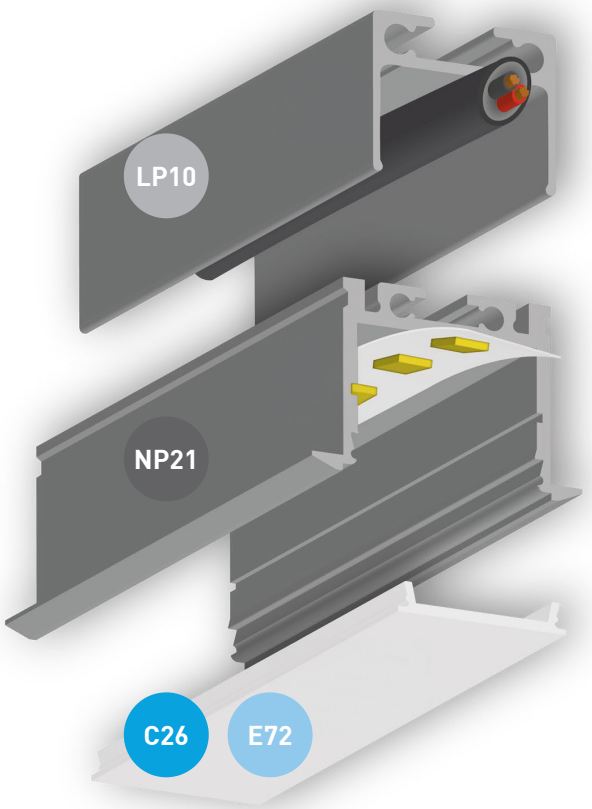

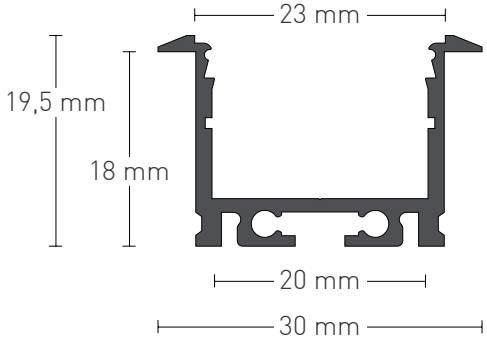

PERFIS DE ALUMÍNIO | ALUMINIUM PROFILES

MONTAGEM | MOUNTING





LP10

MONTAGEM | MOUNTING



KG
131g/m
WEIGHT

200cm
LENGTH

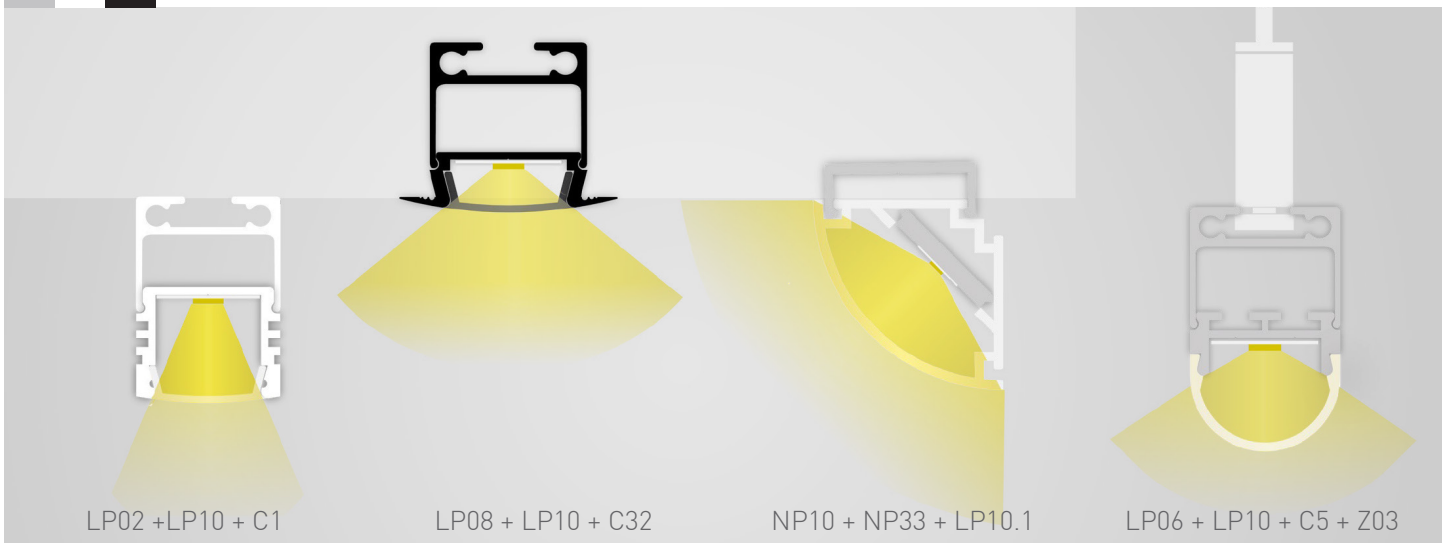

LP02 +LP10 + C1 | LP08 + LP10 + C32 | NP10 + NP33 + LP10.1 | LP06 + LP10 + C5 + Z03

	PERFIS | PROFILES		
LP10	AL	G810-7012	
LP10	WH	G810-7013	●
LP10	BL	G810-7014	●

	ACESSÓRIOS | ACCESSORIES	
Z10	G830-1504	
Z11	G830-1505	
Z03	G830-1502	
Z03W	G830-1512	●
Z03B	G830-1511	●
Z05	G830-1501	

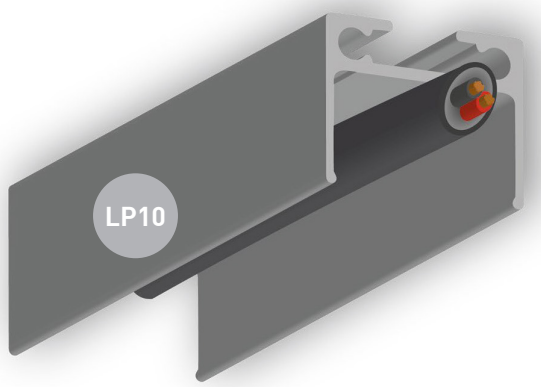



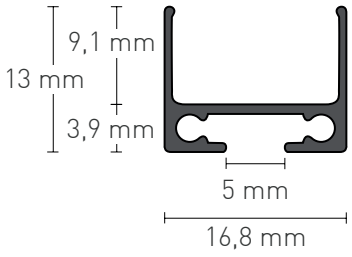

● Sob consulta | Under request

LP10.1

MONTAGEM | MOUNTING



70g/m
WEIGHT

200cm
LENGTH

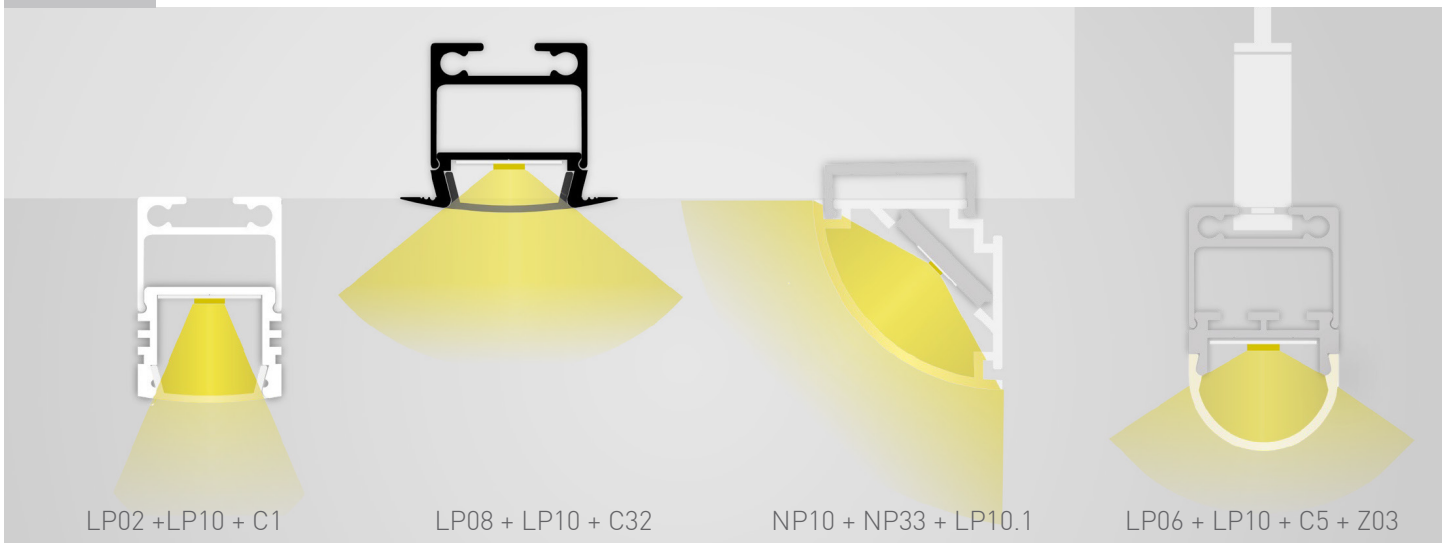

LP02 +LP10 + C1

LP08 + LP10 + C32

NP10 + NP33 + LP10.1

LP06 + LP10 + C5 + Z03

LP10.1	**PERFIS | PROFILES**	
	200cm	**G810-1080**
LP10.1 10cm	**ACESSÓRIOS | ACCESSORIES**	
	10cm	**G810-1085**

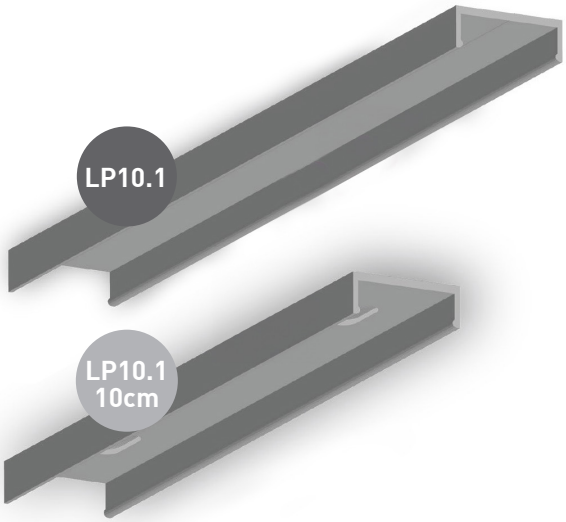





PERFIS DE ALUMÍNIO | ALUMINIUM PROFILES

CANTO | CORNER

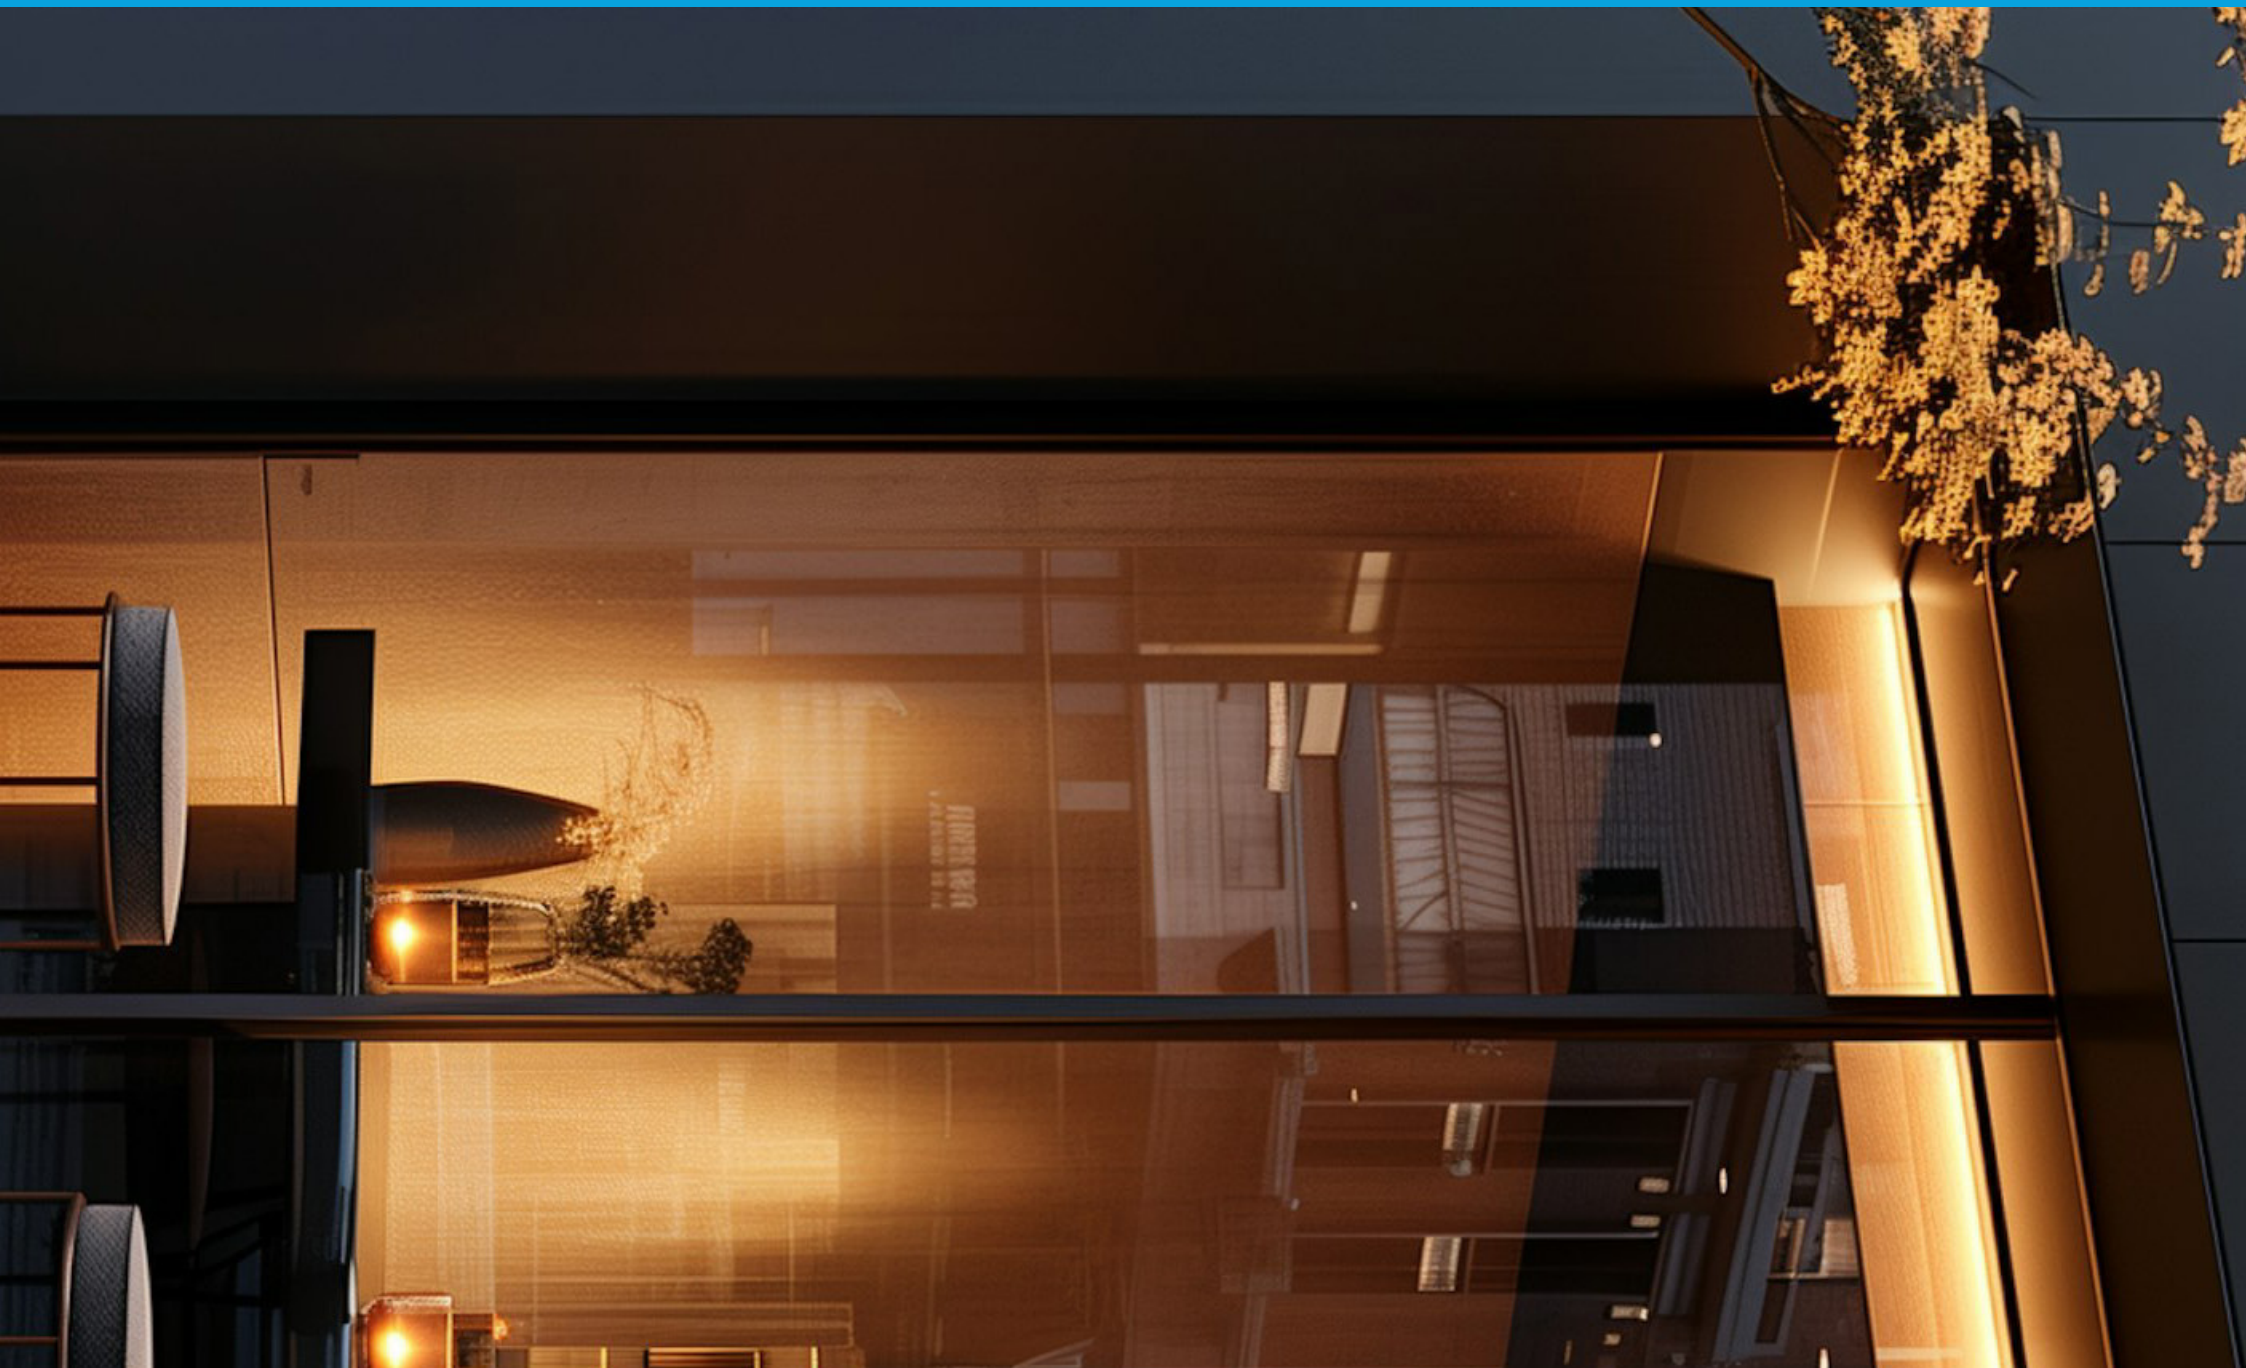



LN10

CANTO | CORNER

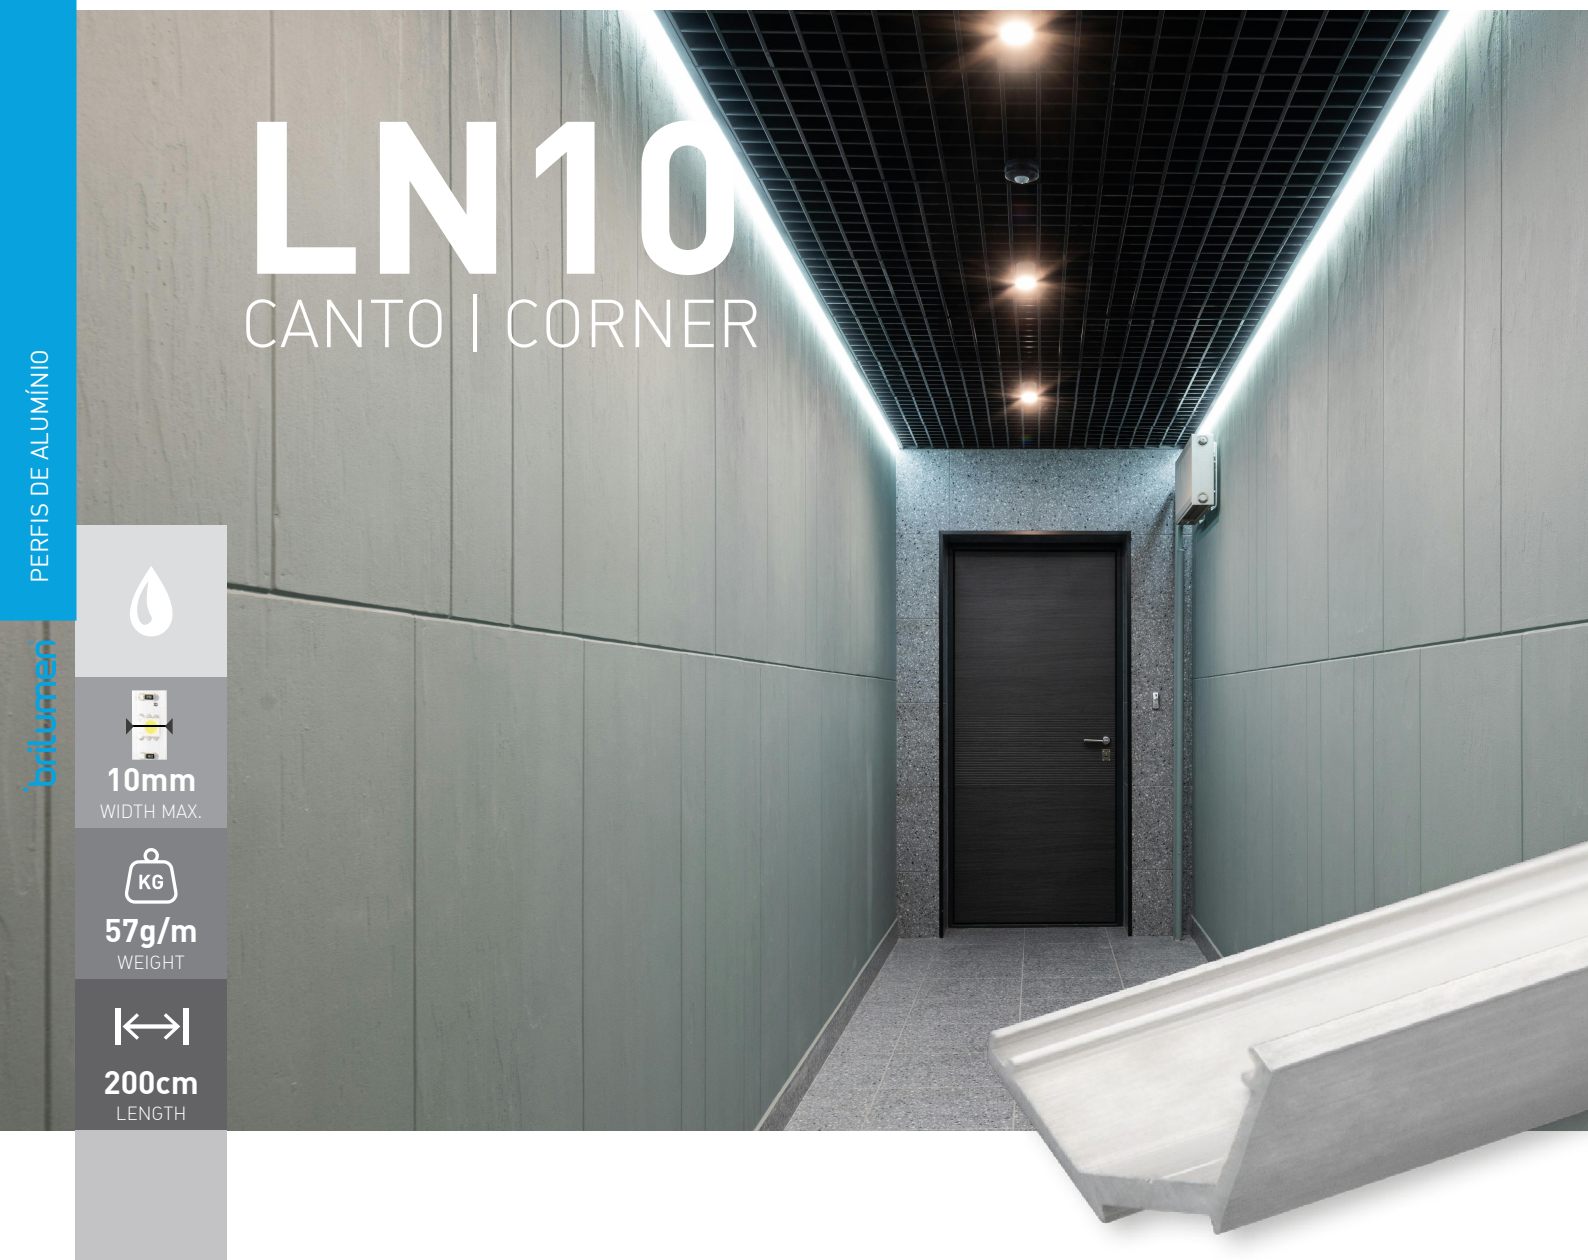

10mm
WIDTH MAX.

57g/m
WEIGHT

200cm
LENGTH



LN10 + C49

	PERFIS | PROFILES	
LN10	AL	G812-1400
	DIFUSORES | DIFFUSERS	
C49	65%	G860-0101
	TOPOS | END CAPS	
E87		G812-1450
E88		G812-1451
	ACESSÓRIOS | ACCESSORIES	
Z38		G812-1460



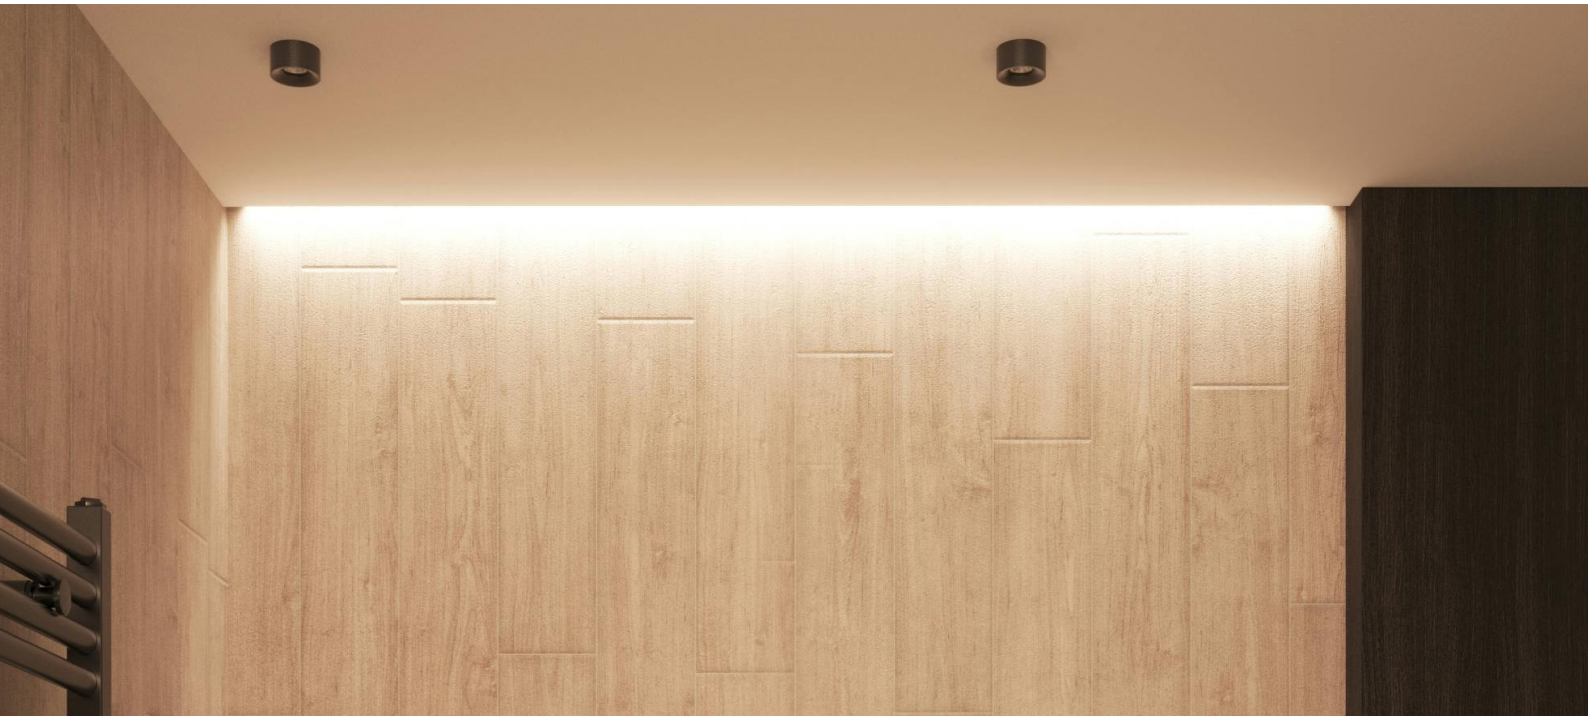



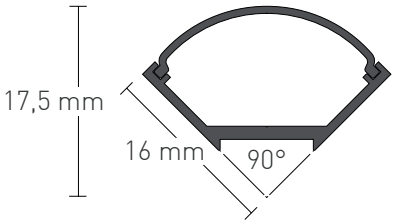

NP10

CANTO | CORNER



13mm
WIDTH MAX.

77g/m
WEIGHT

200cm
LENGTH

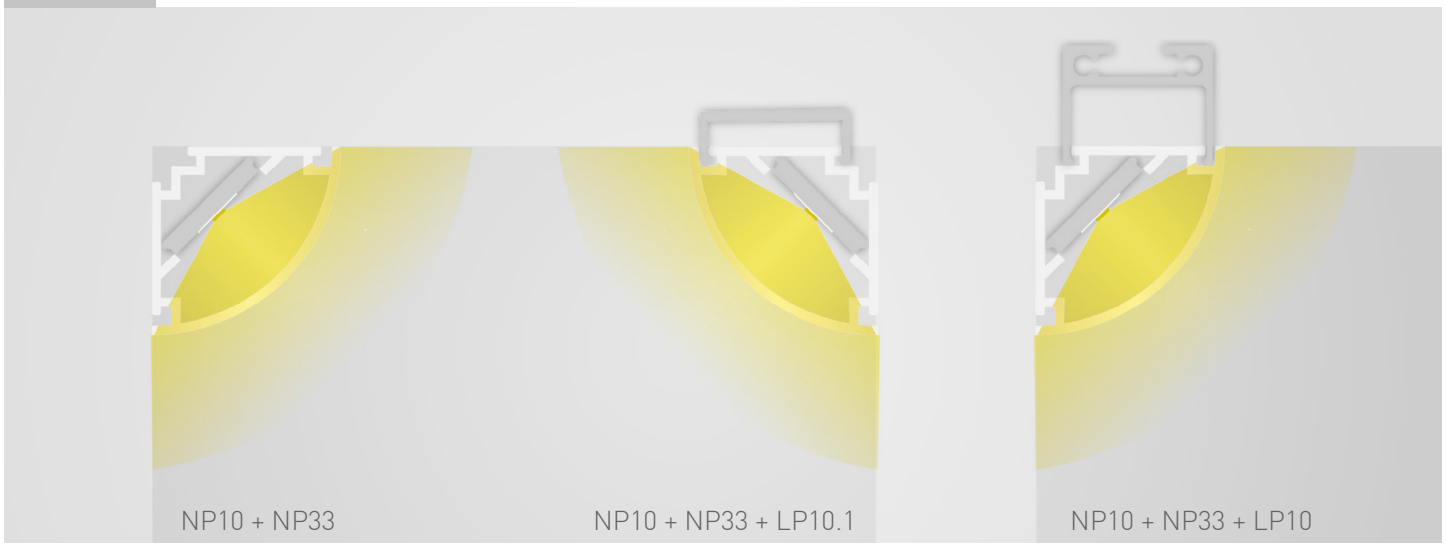

	PERFIS | PROFILES		
NP33	AL	**G810-5050**	
	DIFUSORES | DIFFUSERS		
NP10	65%	**G860-0043**	
	TOPOS | END CAPS		
E67		**G810-1075**	
E68		**G810-1076**	
	ACESSÓRIOS | ACCESSORIES		
LP10.1	10 cm	**G810-1085**	
	200 cm	**G810-1080**	
LP10	AL	**G810-7012**	
	WH	**G810-7013**	●
	BL	**G810-7014**	●

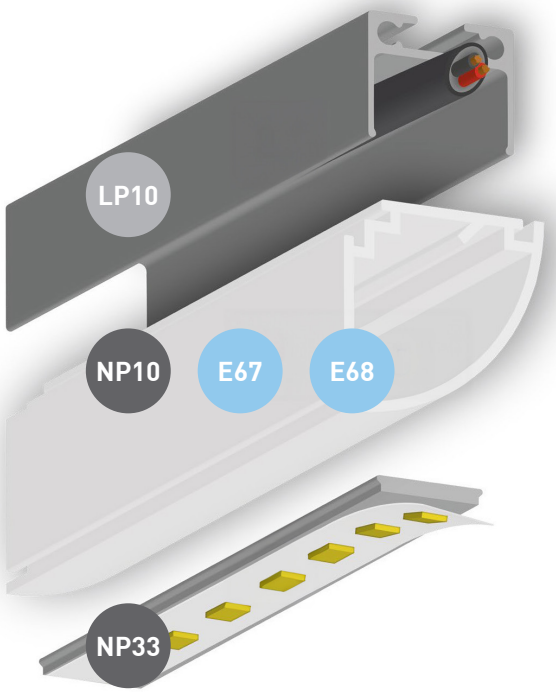

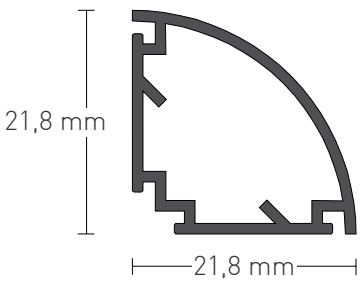

● Sob consulta | Under request

NP19 V3

CANTO | CORNER



20mm
WIDTH MAX.

KG
496g/m
WEIGHT

200cm
LENGTH

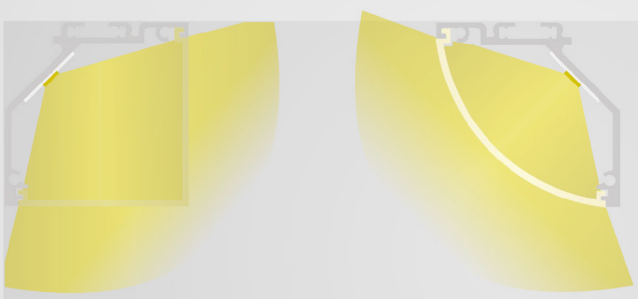

NP19 V3 + C16

NP19 V3 + C17

	PERFIS | PROFILES		
NP19 V3	AL		**G812-3359**
	DIFUSORES | DIFFUSERS		
C16	65%		**G860-0023**
C17	65%		**G860-0024**
	TOPOS | END CAPS		
E52	C16		**G810-6075**
E55	C17		**G810-6077**
	ACESSÓRIOS | ACCESSORIES		
Z10			**G830-1504**
Z11			**G830-1505**
Z50			**G812-3360**

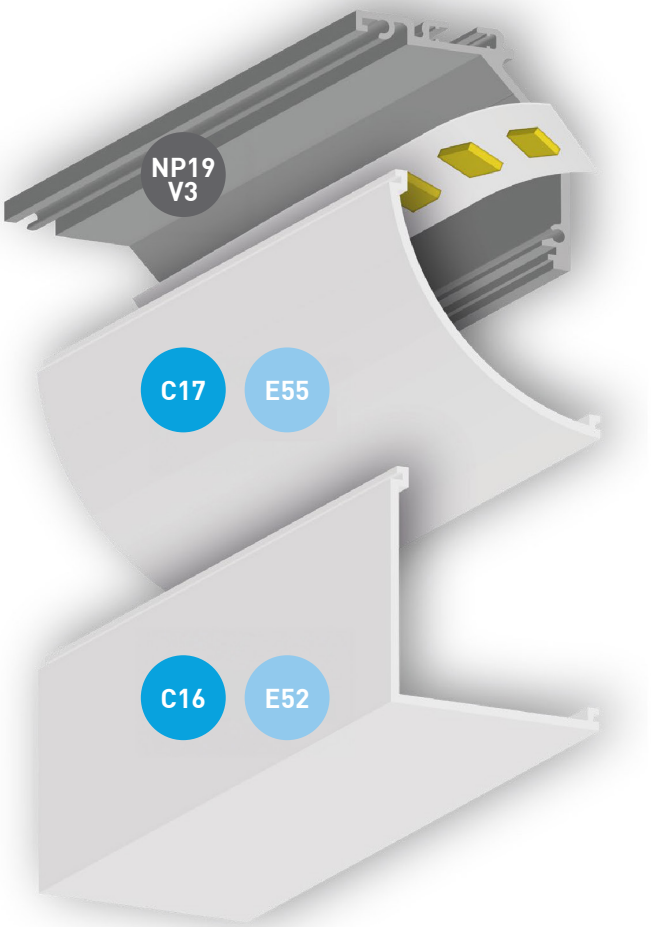

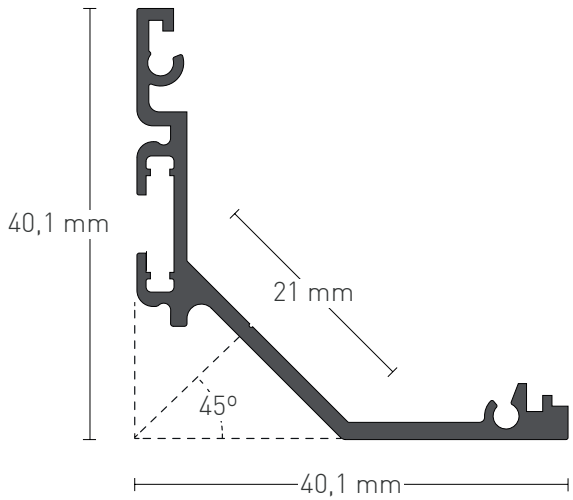

OP05

CANTO | CORNER



12mm
WIDTH MAX.

107g/m
WEIGHT

200cm
LENGTH

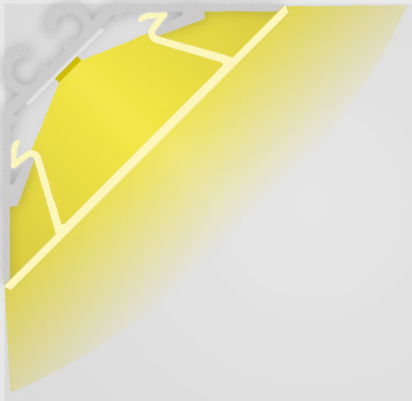

OP05 + C45

	PERFIS | PROFILES	
OP05	AL	G812-3100
	DIFUSORES | DIFFUSERS	
C45	65%	G860-0097
C46	75%	G860-0098 ●
	TOPOS | END CAPS	
E84		G812-3150

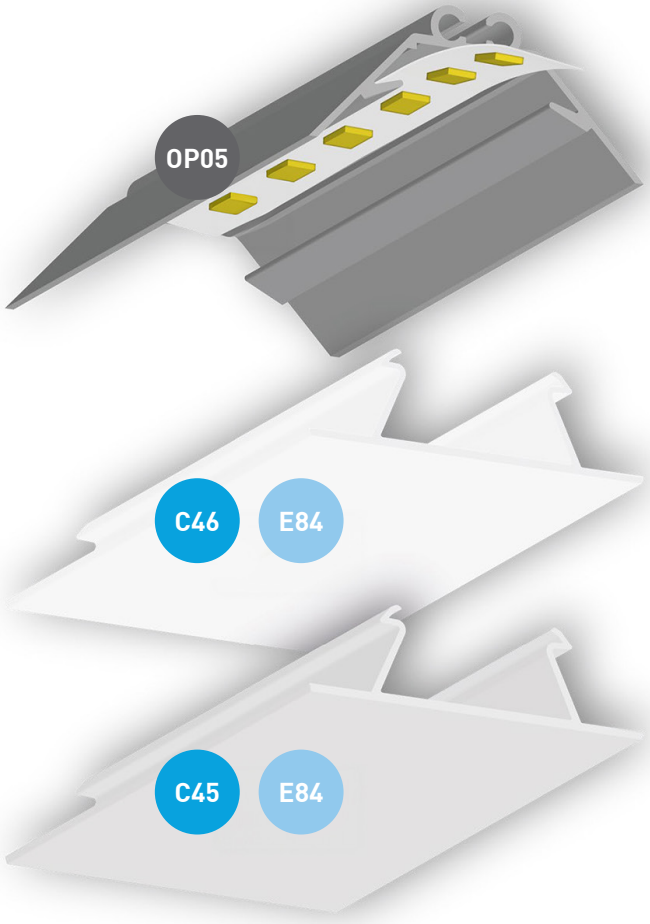

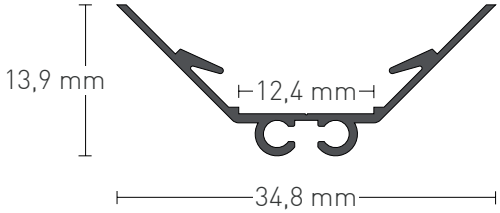

● Sob consulta | Under request

OP23 V2

CANTO | CORNER



11mm
WIDTH MAX.

129g/m
WEIGHT

200cm
LENGTH



OP23 V2 + C54



OP23 V2 + C55



OP23 V2 + C55

PERFIS | PROFILES			
OP23V2	AL	G810-4060	
OP23V2	WH	G810-4062	●
OP23V2	BL	G810-4064	●
DIFUSORES | DIFFUSERS			
C54	65%	G860-0119	
C55	85%	G860-0120	●
TOPOS | END CAPS			
E96		G810-4070	
E96W		G810-4072	●
E96B		G810-4074	●
E97		G810-4071	
E97W		G810-4073	●
E97B		G810-4075	●
ACESSÓRIOS | ACCESSORIES			
Z02		G810-4050	
Z47	AL	G830-4039	
	WH	G830-4041	●
	BL	G830-4040	●

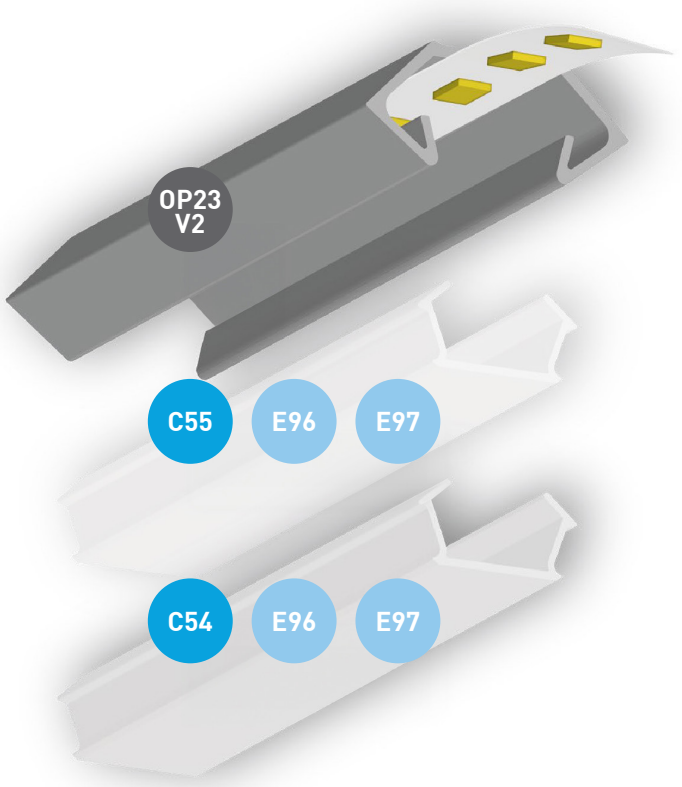

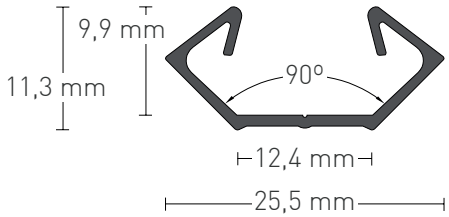

● Sob consulta | Under request

PW01

CANTO | CORNER



18mm
WIDTH MAX.

186g/m
WEIGHT

200cm
LENGTH





	PERFIS | PROFILES		
PW01	WH	**G810-2085**	●
PW01	BL	**G810-2084**	●
	DIFUSORES | DIFFUSERS		
C30	65%	**G860-0077**	
C47	75%	**G860-0099**	●
	TOPOS | END CAPS		
E110	L-W	**G830-4015**	●
	L-B	**G830-4016**	●
	R-W	**G830-4043**	●
	R-B	**G830-4044**	●
E111	L-W	**G830-4017**	●
	L-B	**G830-4018**	●
	R-W	**G830-4045**	●
	R-B	**G830-4046**	●

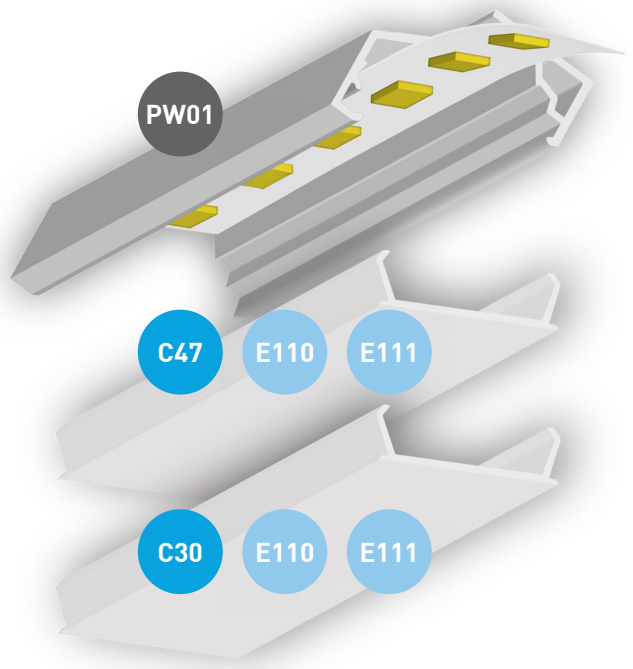

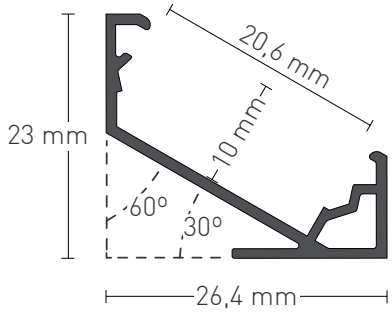

● Sob consulta | Under request

PERFIS DE ALUMÍNIO | ALUMINIUM PROFILES

INDIRETO | INDIRECT

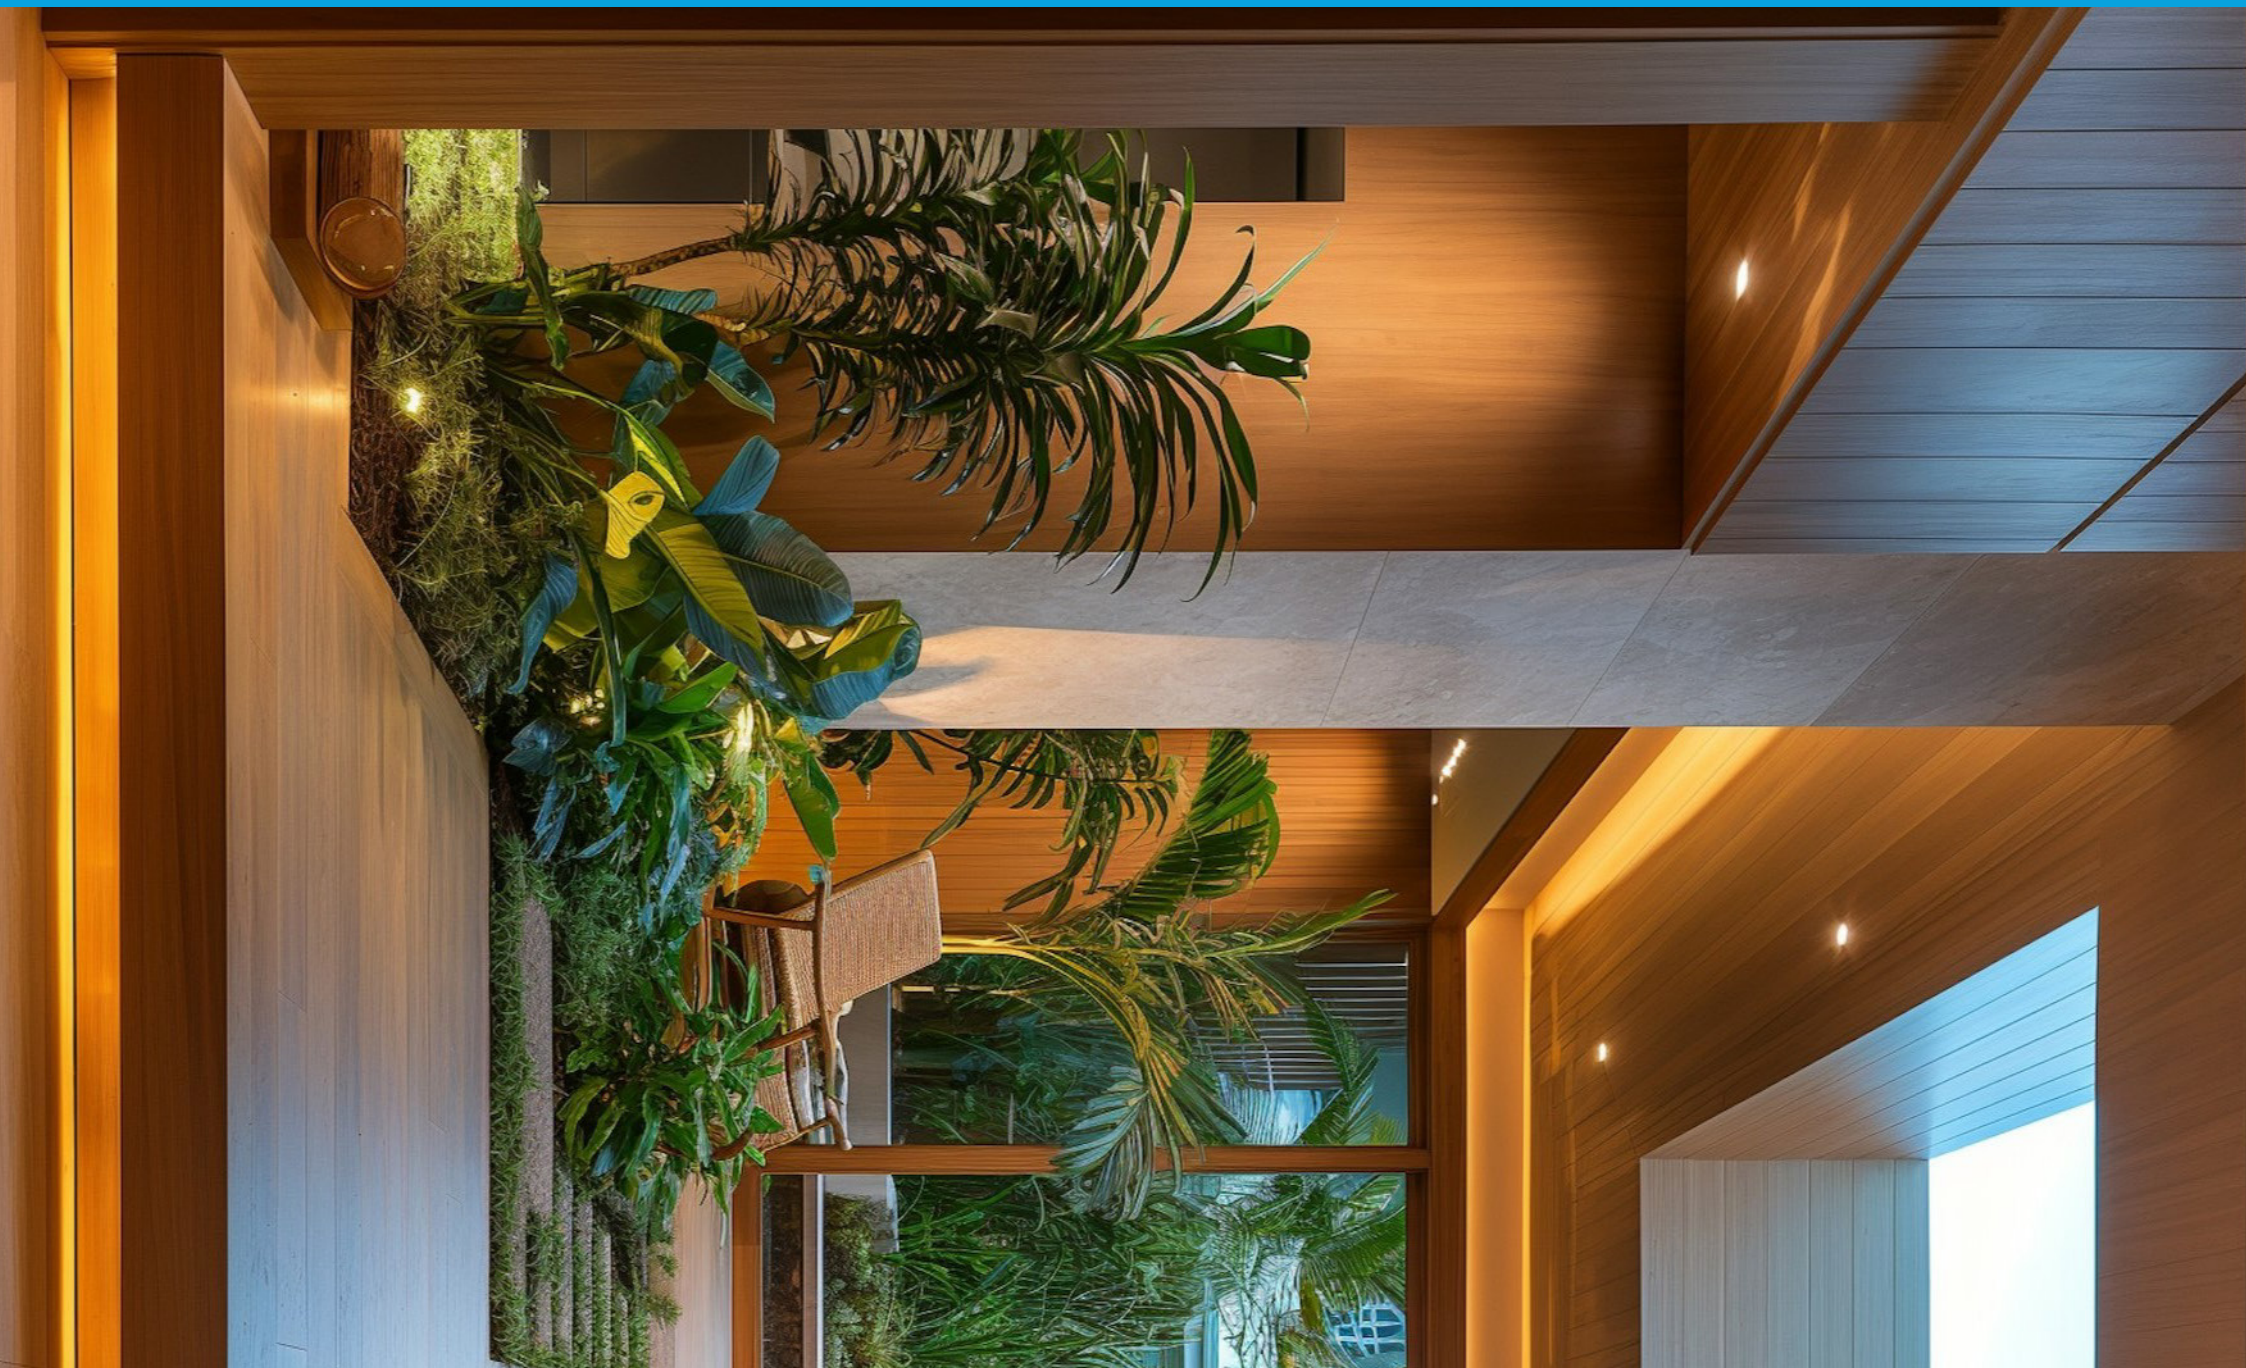



AV02

INDIRETO | INDIRECT



16mm
WIDTH MAX.

563g/m
WEIGHT

200cm
LENGTH

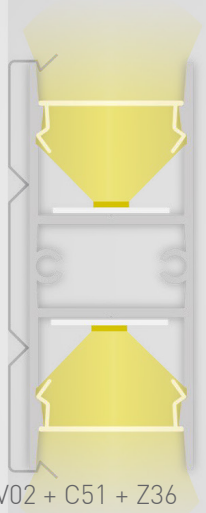

AV02 + C51 + Z36

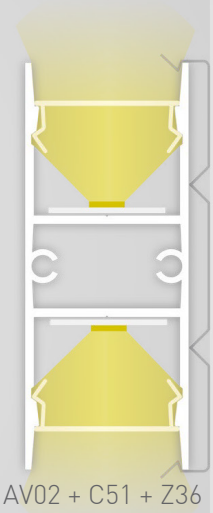

AV02 + C51 + Z36

PERFIS | PROFILES			
AV02	AL	G812-3154	
AV02	WH	G812-3156	●
AV02	BL	G812-3155	●
DIFUSORES | DIFFUSERS			
C50	65%	G860-0104	
C51	85%	G860-0105	●
TOPOS | END CAPS			
E90		G812-3183	
E90W		G812-3185	●
E90B		G812-3184	●
ACESSÓRIOS | ACCESSORIES			
Z36		G812-3201	

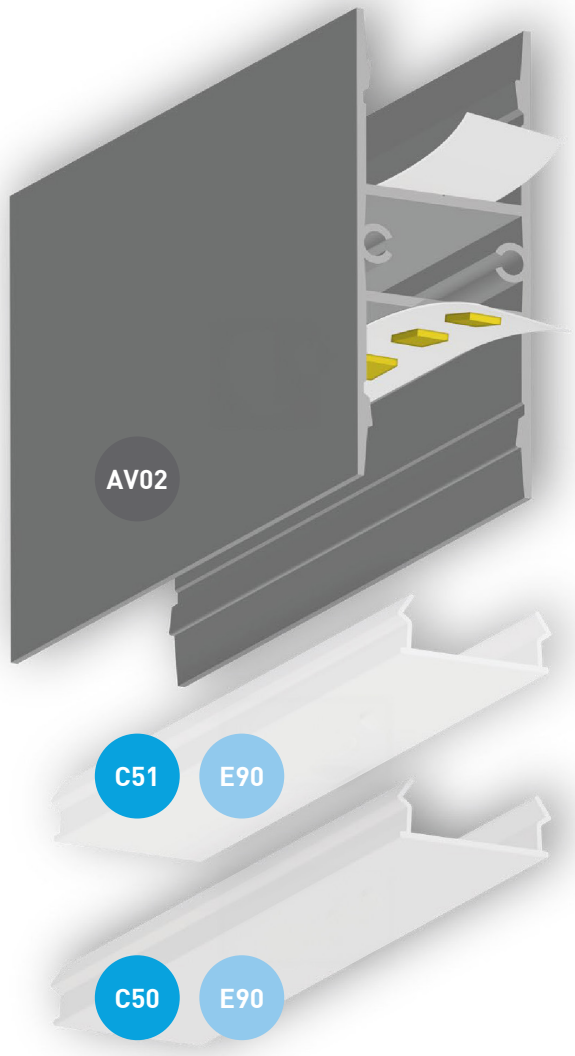

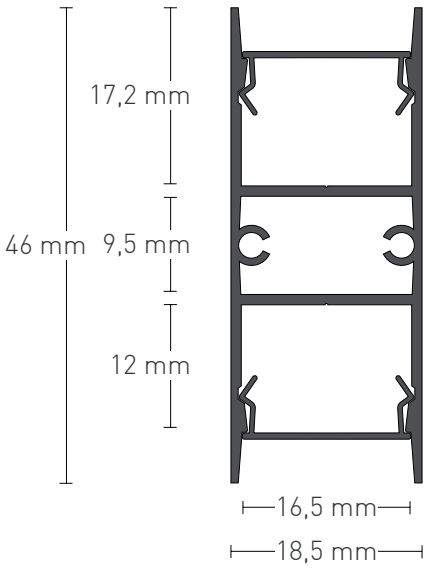

● Sob consulta | Under request

AV03

INDIRETO | INDIRECT



16mm
WIDTH MAX.

622g/m
WEIGHT

200cm
LENGTH



	PERFIS | PROFILES		
AV03	AL	G812-3157	
AV03	WH	G812-3159	●
AV03	BL	G812-3158	●
	DIFUSORES | DIFFUSERS		
C50	65%	G860-0104	
C51	85%	G860-0105	●
	TOPOS | END CAPS		
E91		G812-3186	
E91W		G812-3188	●
E91B		G812-3187	●
	ACESSÓRIOS | ACCESSORIES		
Z35		G812-3200	
Z51		G812-3362	
Z10		G830-1504	
Z11		G830-1505	

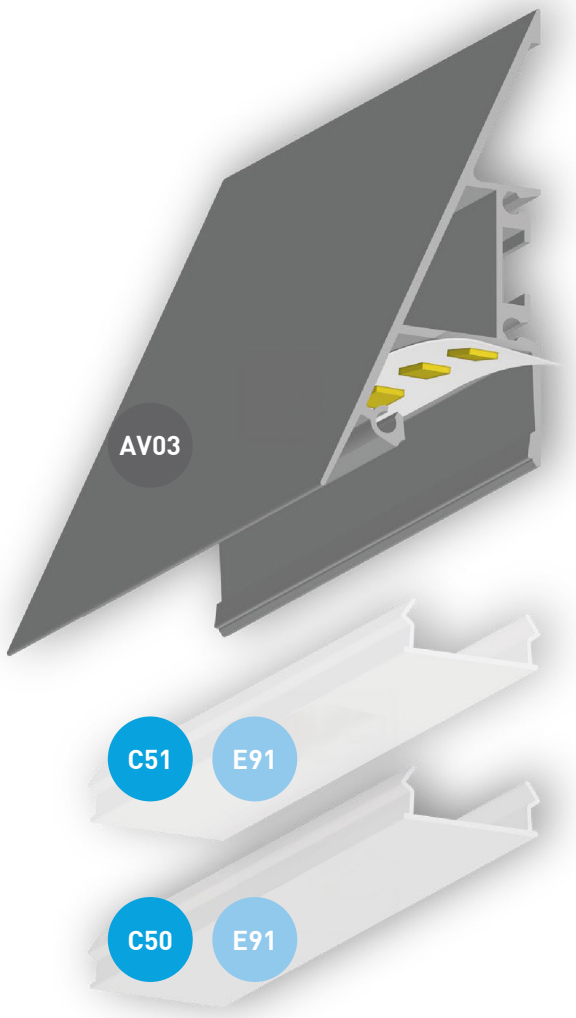

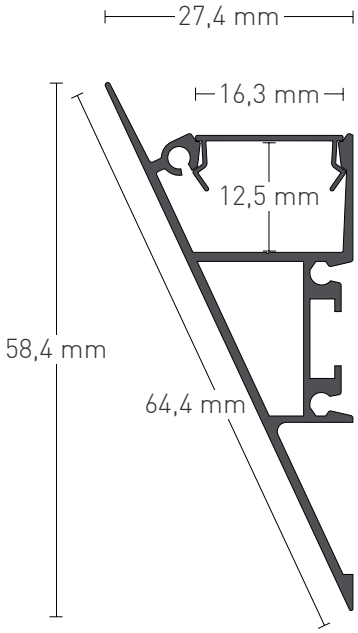

● Sob consulta | Under request

AV04

INDIRETO | INDIRECT



16/14mm
WIDTH MAX.

615g/m
WEIGHT

200cm
LENGTH



AV04 + C50

AV04 + C50

AV04 + C50

PERFIS | PROFILES			
AV04	AL	G812-3160	
AV04	WH	G812-3162	●
AV04	BL	G812-3161	●
DIFUSORES | DIFFUSERS			
C50	65%	G860-0104	
C51	85%	G860-0105	●
TOPOS | END CAPS			
E92		G812-3189	
E92W		G812-3191	●
E92B		G812-3190	●
ACESSÓRIOS | ACCESSORIES			
Z35		G812-3200	
Z51		G812-3362	
Z10		G830-1504	
Z11		G830-1505	



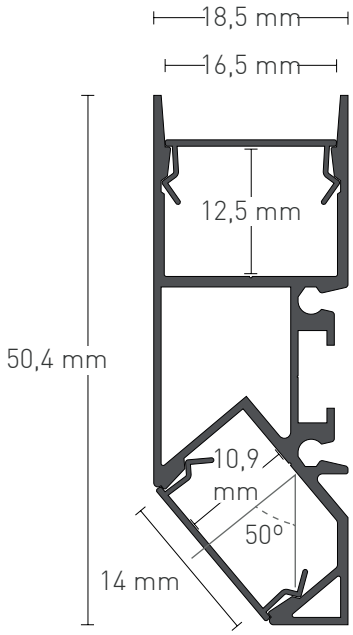

● Sob consulta | Under request

AV05

INDIRETO | INDIRECT



16mm
WIDTH MAX.

763g/m
WEIGHT

200cm
LENGTH



AV05 + C50

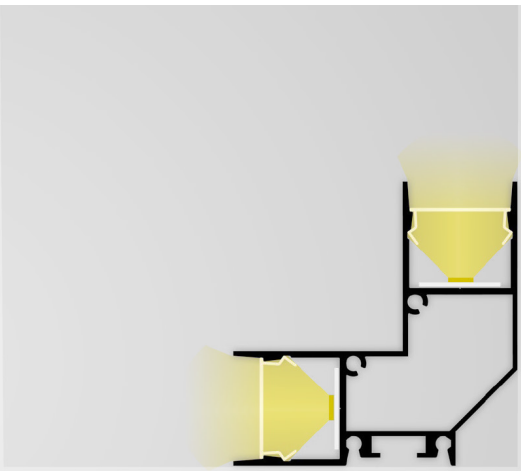

AV05 + C50

AV05 + C50

	PERFIS | PROFILES		
AV05	AL	G812-3163	
AV05	WH	G812-3165	●
AV05	BL	G812-3164	●
	DIFUSORES | DIFFUSERS		
C50	65%	G860-0104	
C51	85%	G860-0105	●
	TOPOS | END CAPS		
E93		G812-3192	
E93W		G812-3194	●
E93B		G812-3193	●
	ACESSÓRIOS | ACCESSORIES		
Z35		G812-3200	
Z51		G812-3362	
Z10		G830-1504	
Z11		G830-1505	

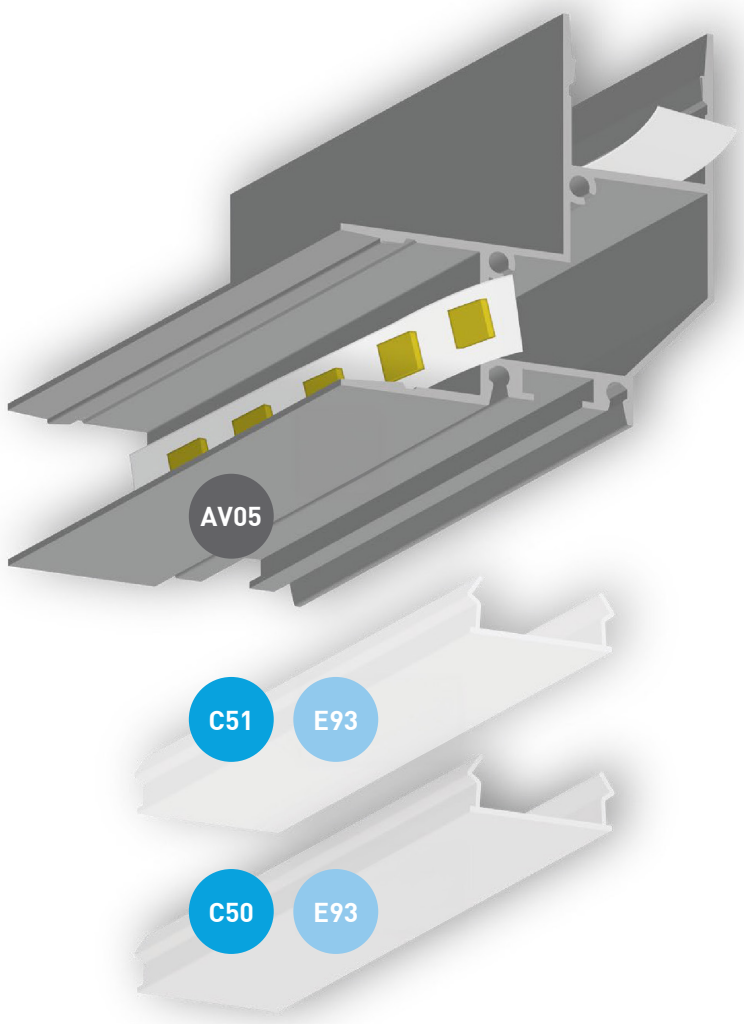

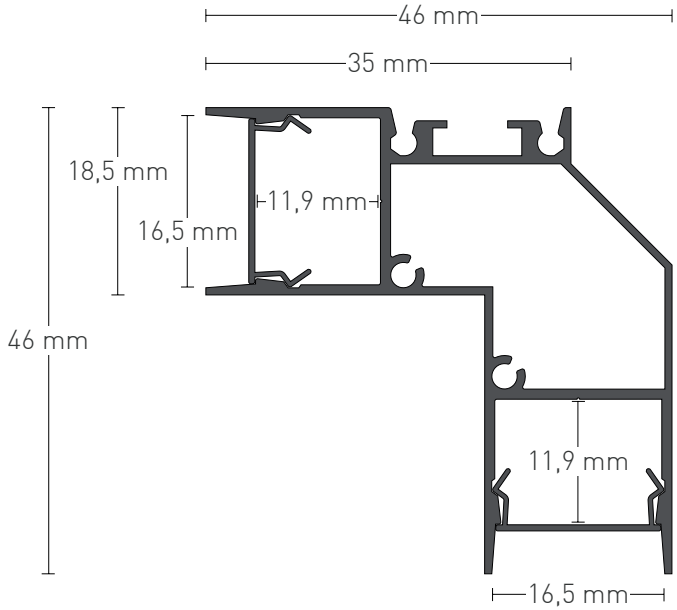

● Sob consulta | Under request

AV06

INDIRETO | INDIRECT



12/16mm
WIDTH MAX.

971g/m
WEIGHT

200cm
LENGTH



AV06 + C27

AV06 + C27

	PERFIS | PROFILES		
AV06	WH	G812-3166	●
AV06	BL	G812-3167	●
	DIFUSORES | DIFFUSERS		
C27	65%	G860-0084	
	TOPOS | END CAPS		
E94W		G812-3196	●
E94B		G812-3195	●
	ACESSÓRIOS | ACCESSORIES		
Z35		G812-3200	
Z51		G812-3362	
Z10		G830-1504	
Z11		G830-1505	

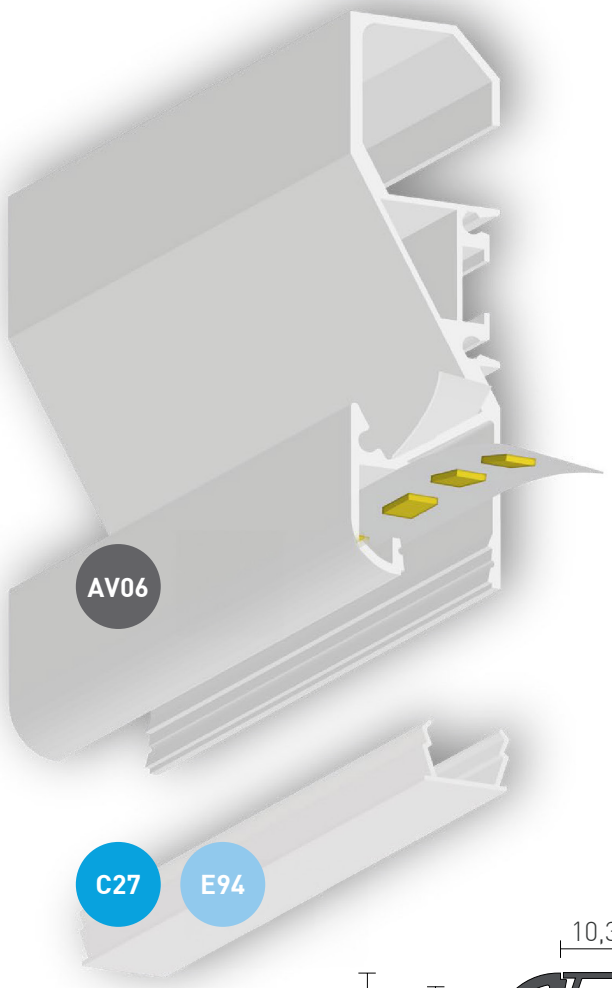

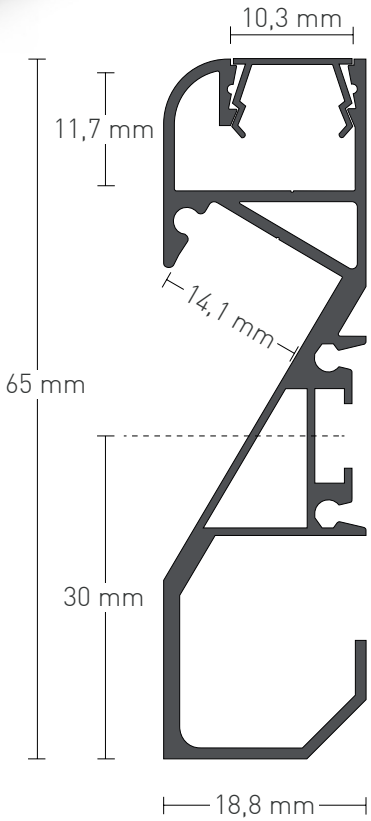

● Sob consulta | Under request

LP13

INDIRETO | INDIRECT



12mm
WIDTH MAX.

623g/m
WEIGHT

200cm
LENGTH



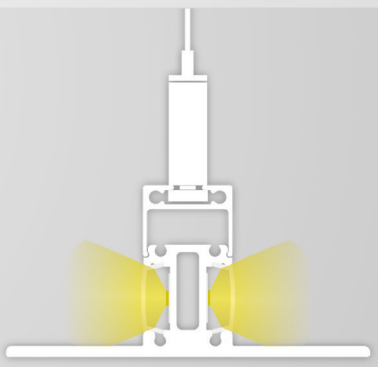

LP13 + C2 + LP10.1

LP13 + LP10.1 + C32

LP13 + C2 + LP10 + Z03W

	PERFIS | PROFILES		
LP13	AL	G810-1004	
LP13	WH	G810-1003	●
LP13	BL	G810-1002	●
	DIFUSORES | DIFFUSERS		
C1	65%	G860-0004	
C2	85%	G860-0003	●
C58	75%	G860-0154	●
C32	25%	G860-0070	●
	TOPOS | END CAPS		
E66		G810-1005	
E66W		G810-1006	●
E66B		G810-1007	●
	LUMINÁRIA LINEAR SUSPENSÃO | LINEAR SUSPENSION LUMINAIRE		
LP10	AL	G810-7012	
LP10	WH	G810-7013	●
LP10	BL	G810-7014	●
Z10		G830-1504	
Z11		G830-1505	
Z03		G830-1502	
Z03W		G830-1512	●
Z03B		G830-1511	●
Z05		G830-1501	
	ACESSÓRIOS | ACCESSORIES		
LP10.1	10cm	G810-1085	
	200cm	G810-1080	

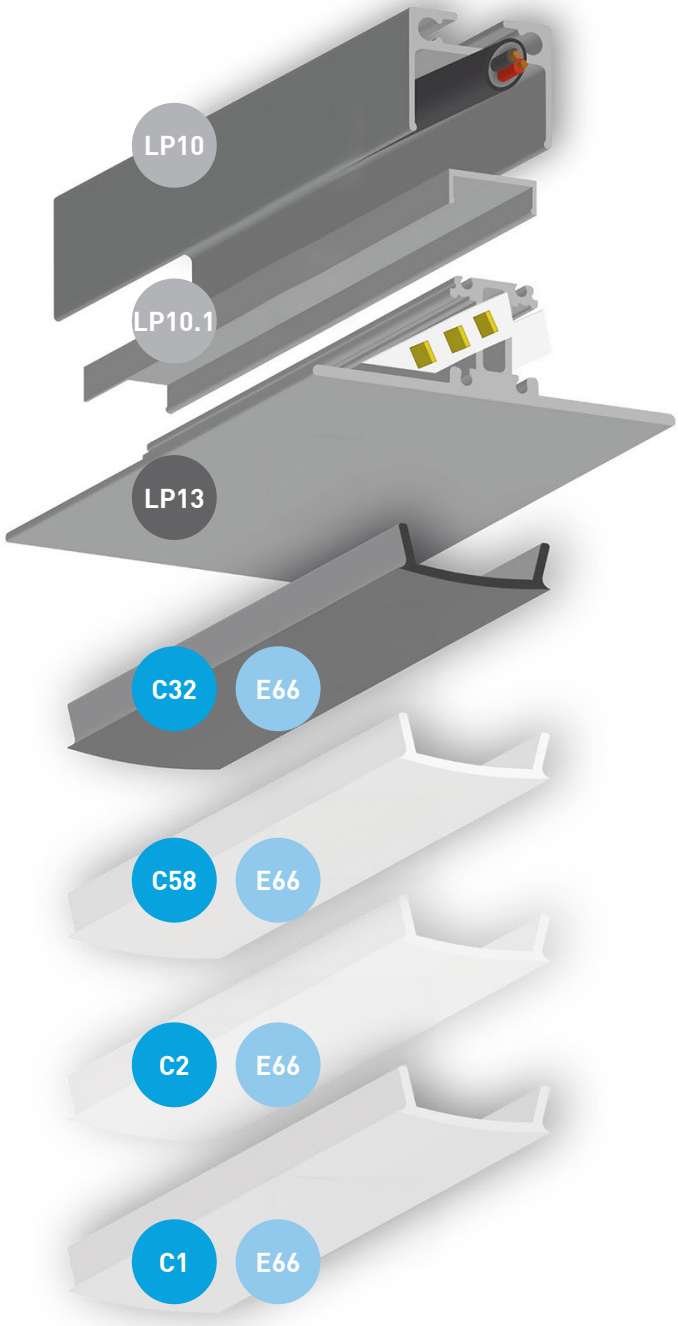

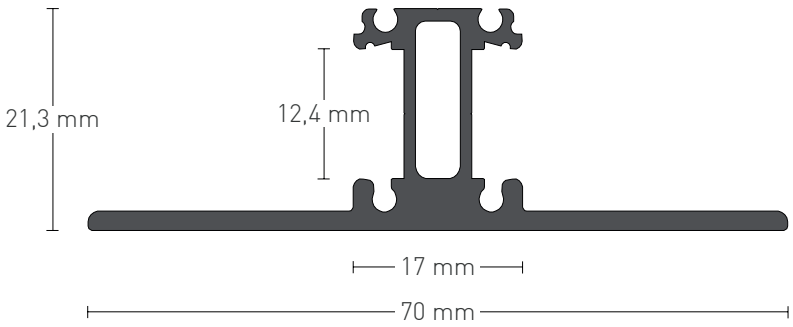

● Sob consulta | Under request

PERFIS DE ALUMÍNIO | ALUMINIUM PROFILES

GESSO CARTONADO | DRYWALL



BTP01

GESSO CARTONADO | DRYWALL



6mm
WIDTH MAX.

327g/m
WEIGHT

200cm
LENGTH

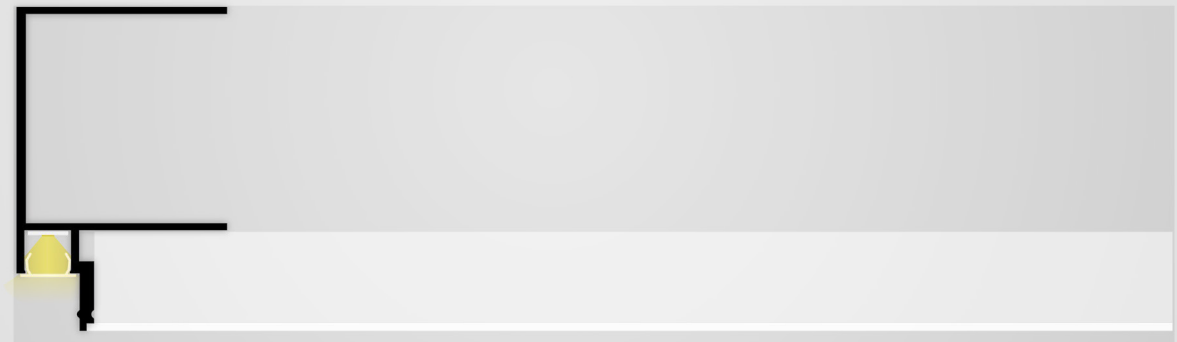

BTP01 + C24

	PERFIS | PROFILES		
BTP01	AL	G810-2050	
BTP01	BL	G810-2056	●
	DIFUSORES | DIFFUSERS		
C24	65%	G860-0106	

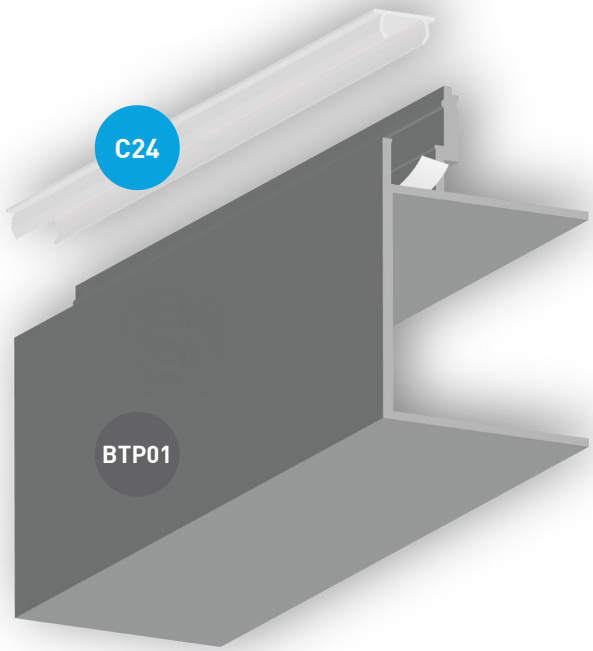

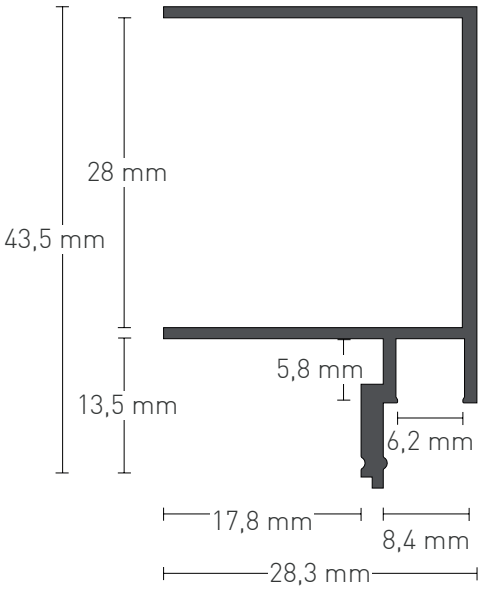

● Sob consulta | Under request

BTP02

GESSO CARTONADO | DRYWALL



11mm
WIDTH MAX.

433g/m
WEIGHT

200cm
LENGTH

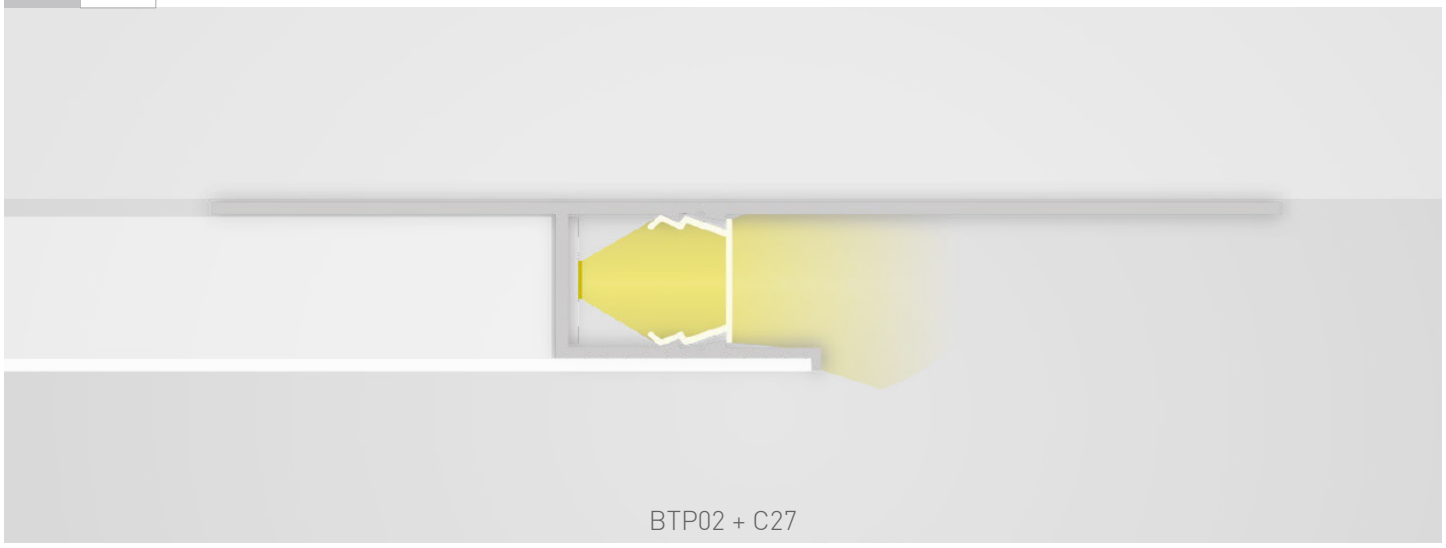

BTP02 + C27

	PERFIS | PROFILES		
BTP02	AL	G810-2040	
BTP02	WH	G810-3040	●
	DIFUSORES | DIFFUSERS		
C27	65%	G860-0084	

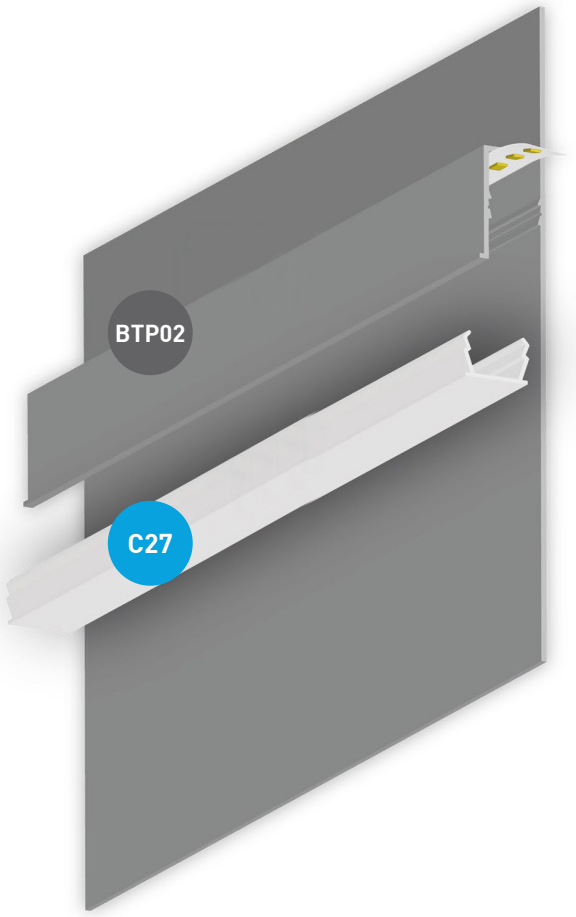

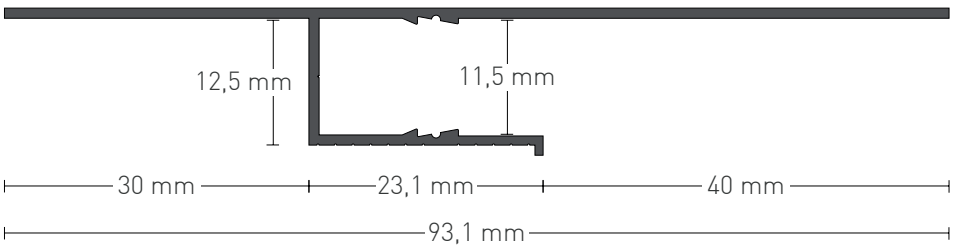

● Sob consulta | Under request

BTP03

GESSO CARTONADO | DRYWALL



14mm
WIDTH MAX.

283g/m
WEIGHT

200cm
LENGTH

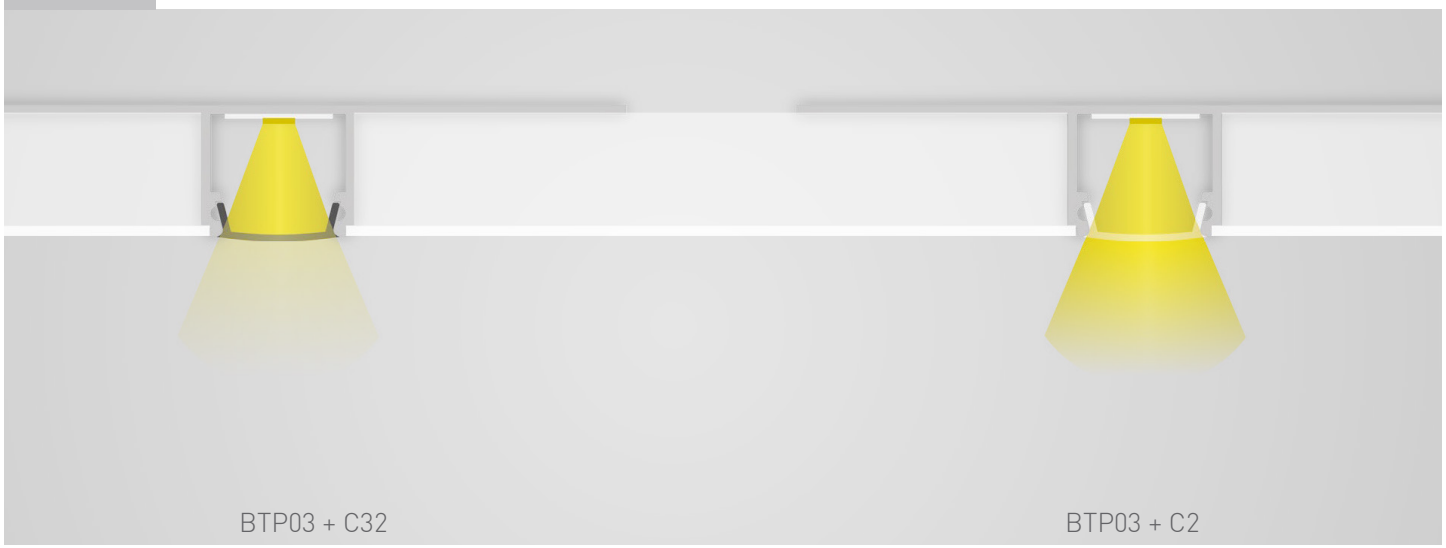

BTP03 + C32

BTP03 + C2

PERFIS | PROFILES			
BTP03	AL	G810-2051	
DIFUSORES | DIFFUSERS			
C1	65%	G860-0004	
C2	85%	G860-0003	●
C58	75%	G860-0154	●
C32	25%	G860-0070	●
TOPOS | END CAPS			
E208 		G810-23009	
E209 		G810-23010	
ACESSÓRIOS | ACCESSORIES			
C1S 		G860-0065	

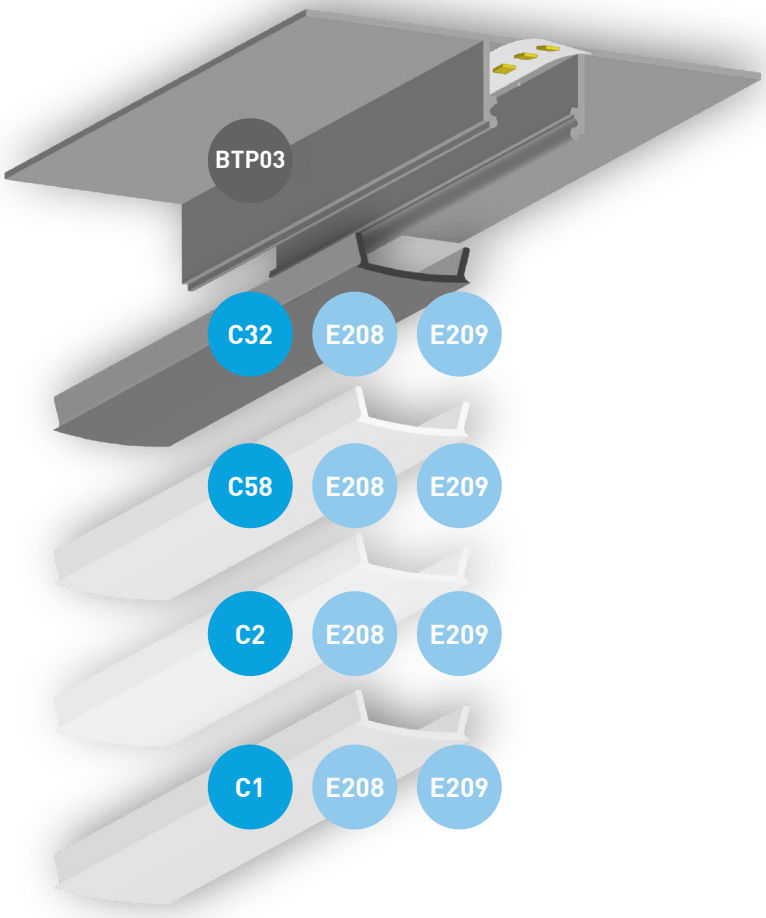

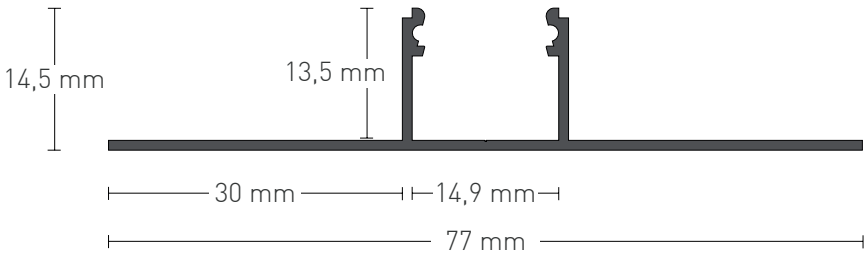

● Sob consulta | Under request

BTP04

GESSO CARTONADO | DRYWALL



14mm
WIDTH MAX.

209g/m
WEIGHT

200cm
LENGTH



BTP04 + C32

BTP04 + C2

	PERFIS | PROFILES		
BTP04	AL	G810-2042	
	DIFUSORES | DIFFUSERS		
C1	65%	G860-0004	
C2	85%	G860-0003	●
C58	75%	G860-0154	●
C32	25%	G860-0070	●
	TOPOS | END CAPS		
E210		G810-23011	
E211		G810-23012	
	ACESSÓRIOS | ACCESSORIES		
C1S		G860-0065	

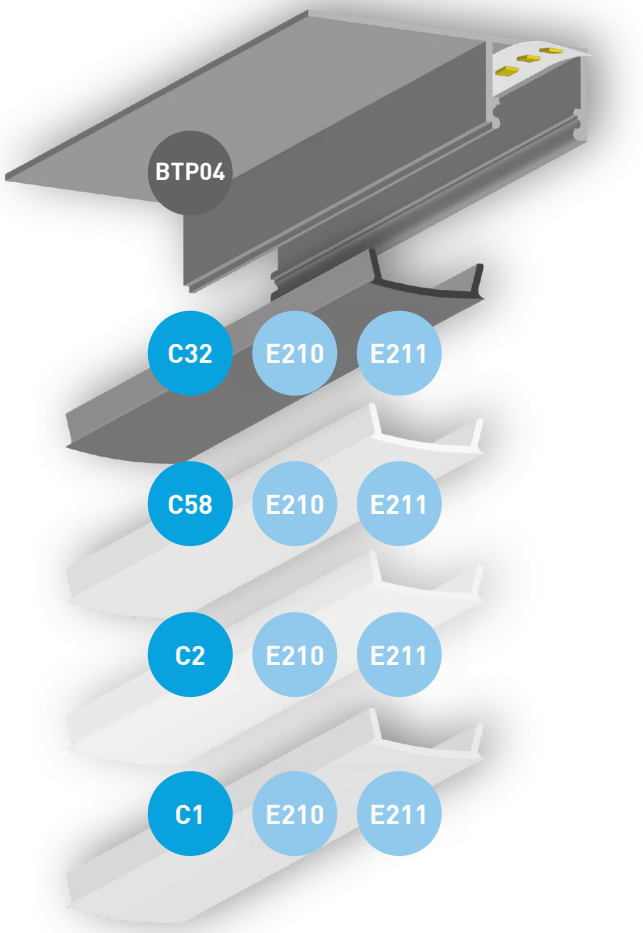

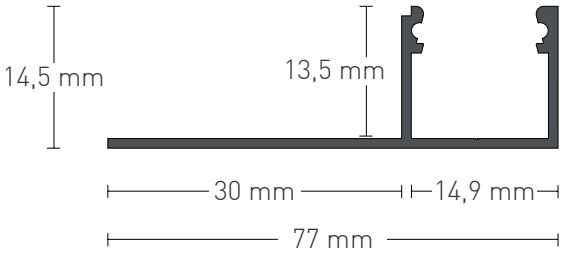

● Sob consulta | Under request

BTP05

GESSO CARTONADO | DRYWALL



20mm
WIDTH MAX.

383g/m
WEIGHT

200cm
LENGTH

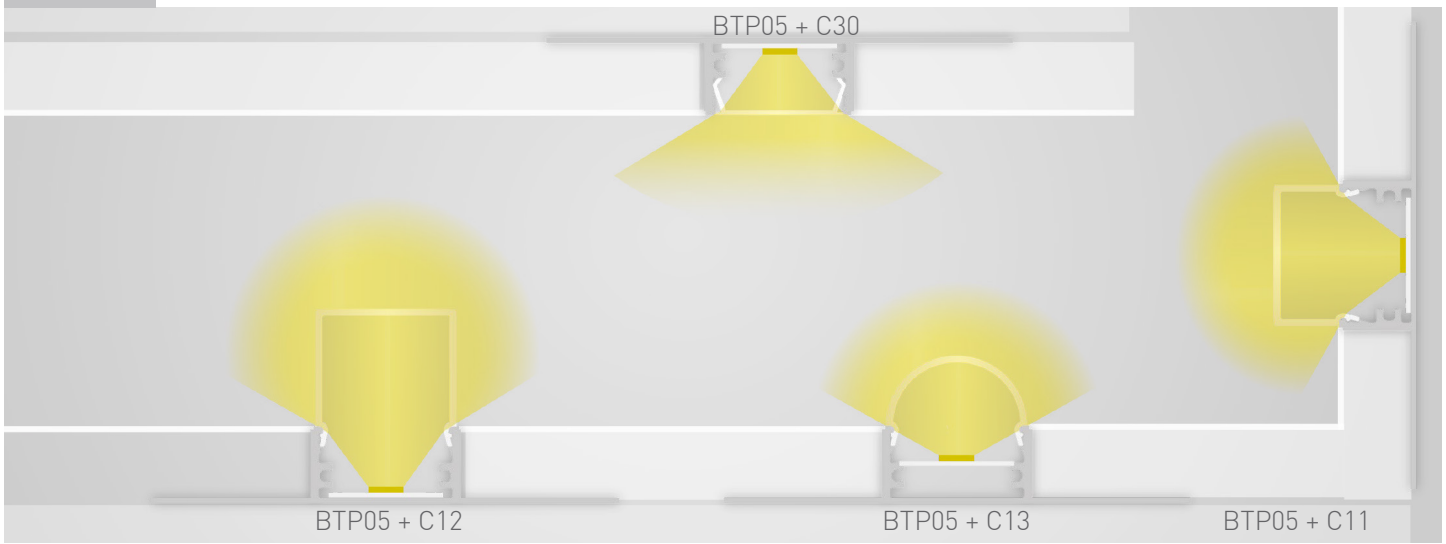

PERFIS | PROFILES			
BTP05	AL	G810-2043	
DIFUSORES | DIFFUSERS			
C30	65%	G860-0077	
C47	75%	G860-0099	●
C11	65%	G860-0018	
C35	85%	G860-0063	●
C12	65%	G860-0019	
C31	85%	G860-0068	●
C13	65%	G860-0020	●
TOPOS | END CAPS			
E43	C30 / C47	G820-1011	
E43W		G820-1015	●
E43B		G820-1016	●
E44	C11 / C35	G820-2011	
E44W		G820-2012	●
E44B		G820-2013	●
E45	C12 / C31	G820-3011	
E45W		G820-3012	●
E45B		G820-3013	●
E46	C13	G820-4011	
E46W		G820-4012	●
E46B		G820-4013	●
E212		G810-23013	
E213		G810-23014	
ACESSÓRIOS | ACCESSORIES			
C10S		G860-0066	

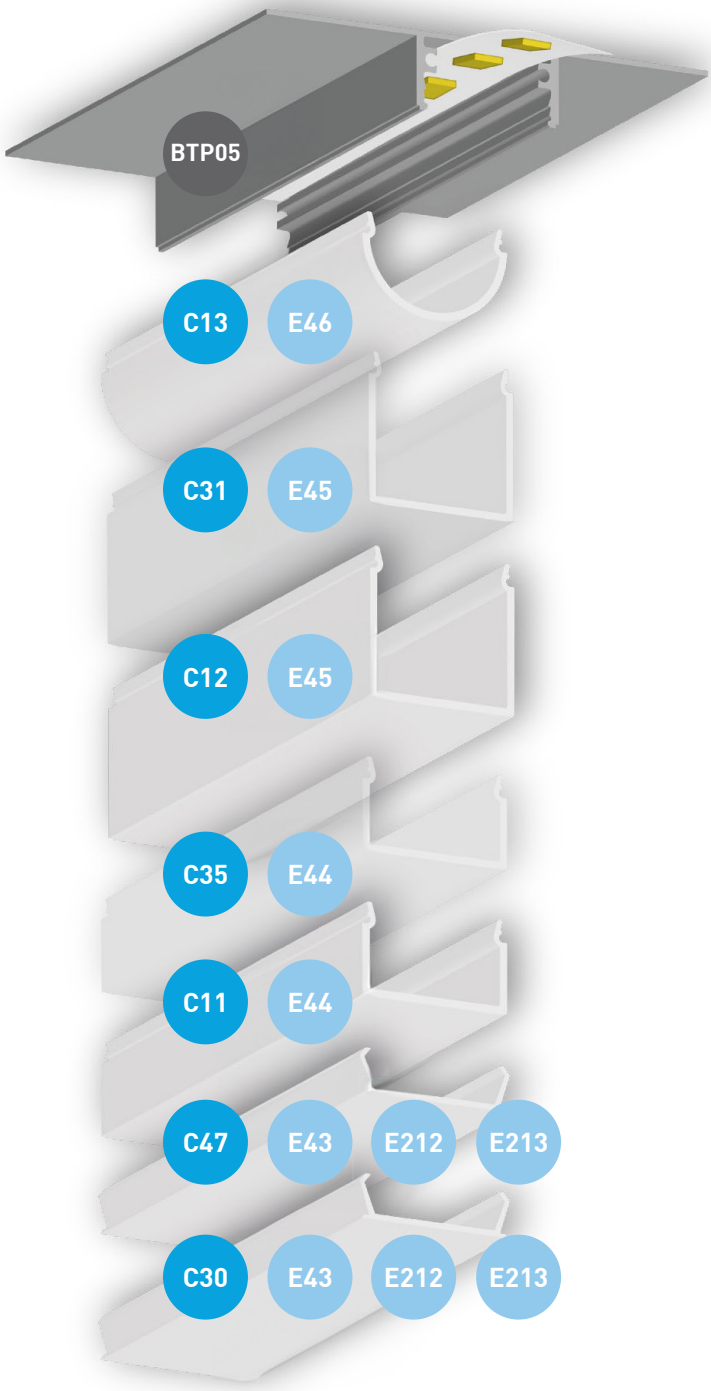

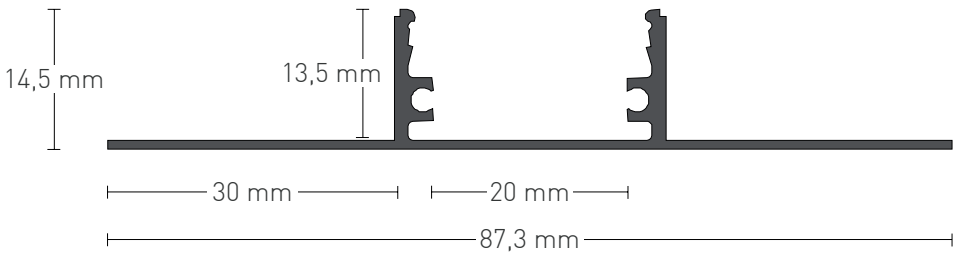

● Sob consulta | Under request

BTP06

GESSO CARTONADO | DRYWALL



14mm
WIDTH MAX.

471g/m
WEIGHT

200cm
LENGTH

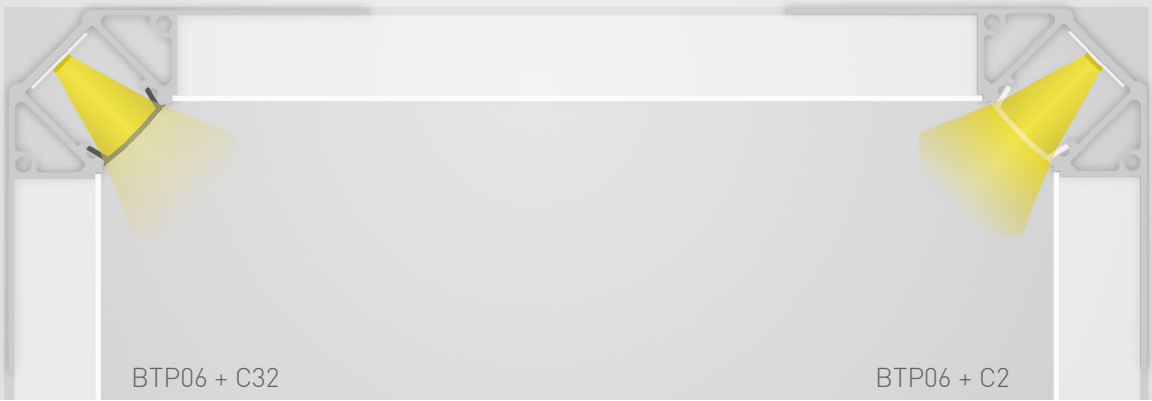

BTP06 + C32

BTP06 + C2

	PERFIS | PROFILES		
BTP06	AL	G810-2044	
	DIFUSORES | DIFFUSERS		
C1	65%	G860-0004	
C2	85%	G860-0003	●
C58	75%	G860-0154	●
C32	25%	G860-0070	●
	TOPOS | END CAPS		
E214		G810-23015	
E215		G810-23016	
	ACESSÓRIOS | ACCESSORIES		
C1S		G860-0065	



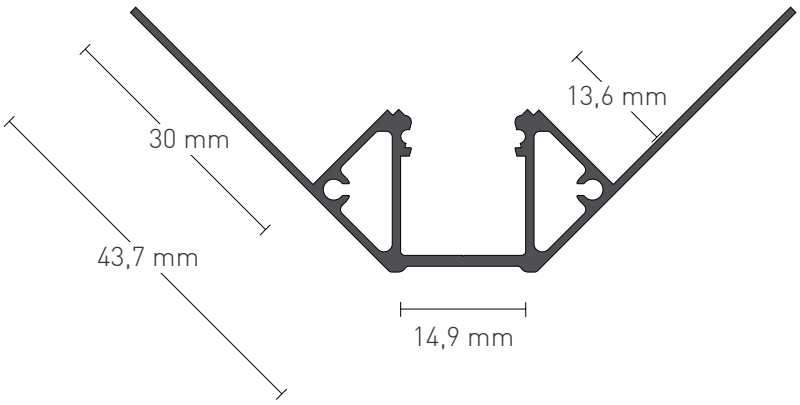

● Sob consulta | Under request

BTP07

GESSO CARTONADO | DRYWALL



12mm
WIDTH MAX.

344g/m
WEIGHT

200cm
LENGTH

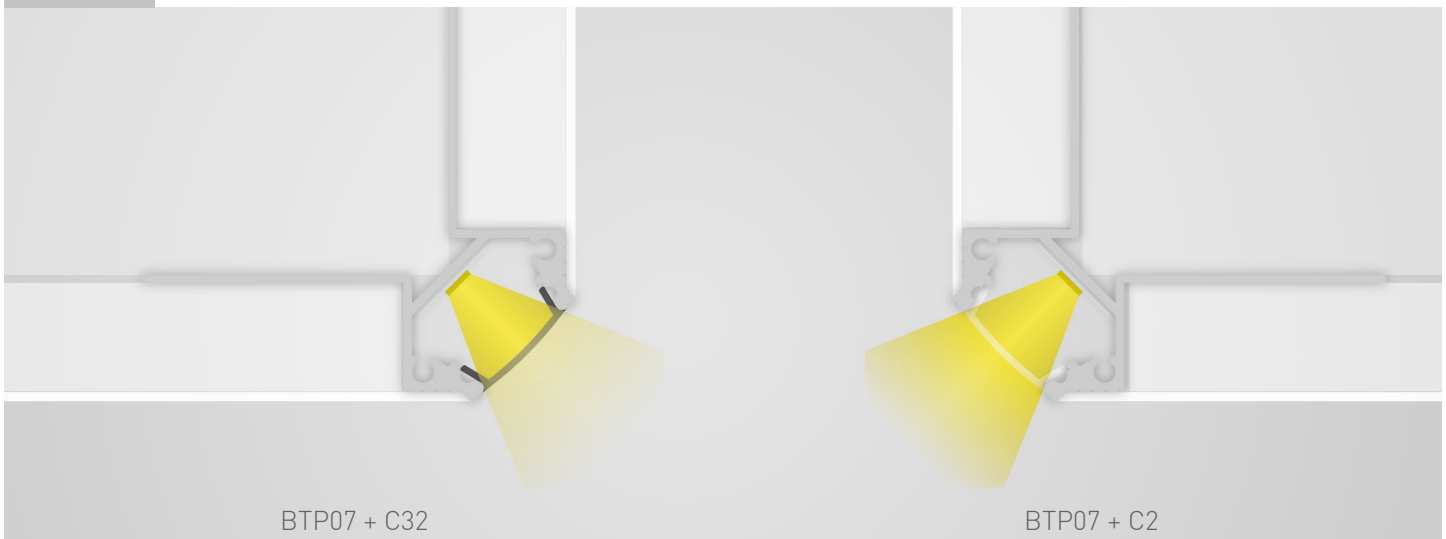

BTP07 + C32

BTP07 + C2

BTP07	**PERFIS | PROFILES**		
	AL	G810-2045	
	DIFUSORES | DIFFUSERS		
C1	65%	G860-0004	
C2	85%	G860-0003	●
C58	75%	G860-0154	●
C32	25%	G860-0070	●
	TOPOS | END CAPS		
E216		G810-23017	
E217		G810-23018	
	ACESSÓRIOS | ACCESSORIES		
C1S		G860-0065	

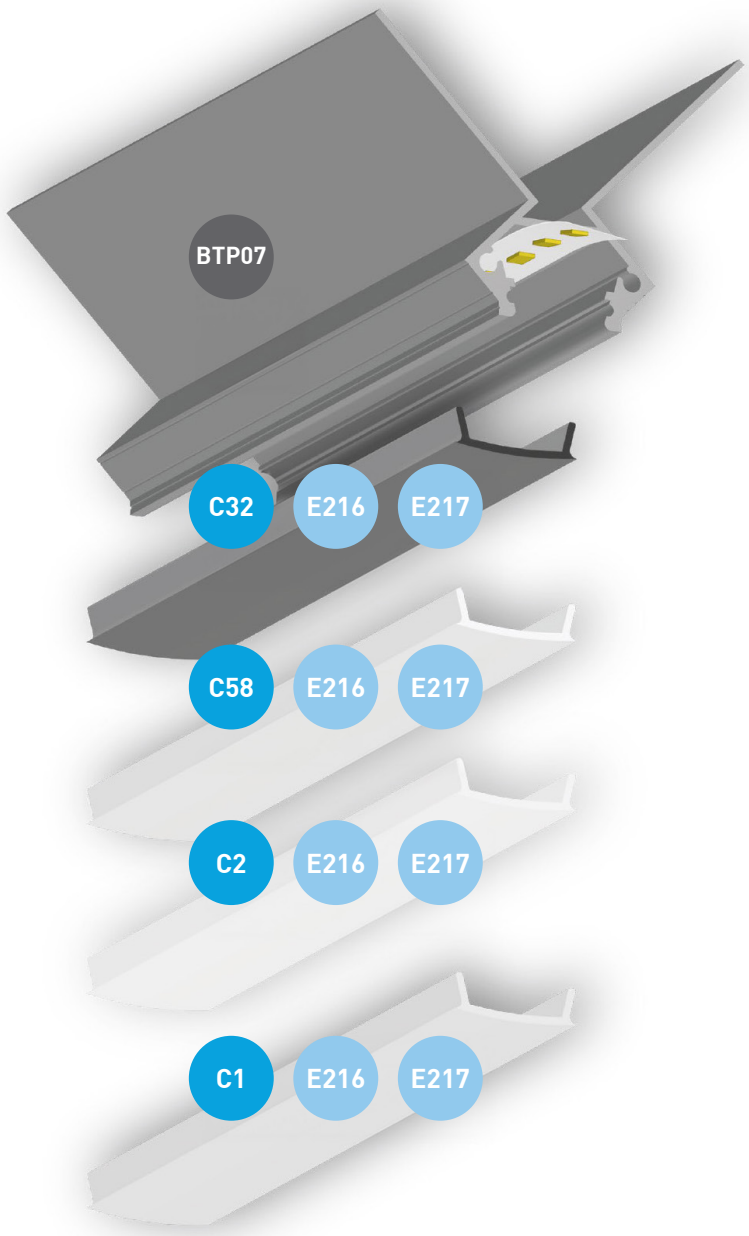

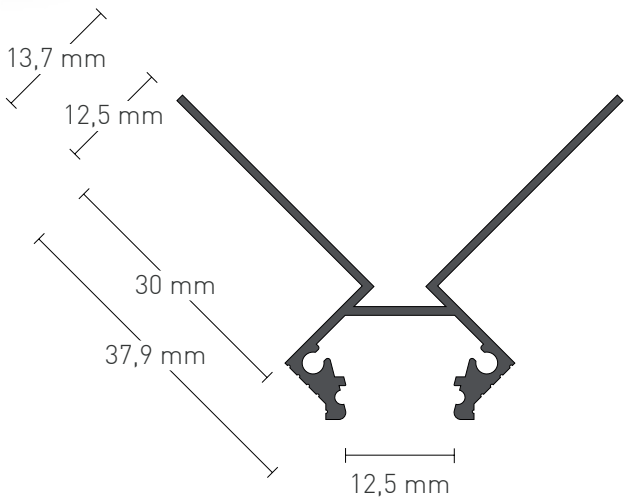

● Sob consulta | Under request

BTP10

GESSO CARTONADO | DRYWALL

11mm
WIDTH MAX.

273g/m
WEIGHT

716g/m
WEIGHT

200cm
LENGTH

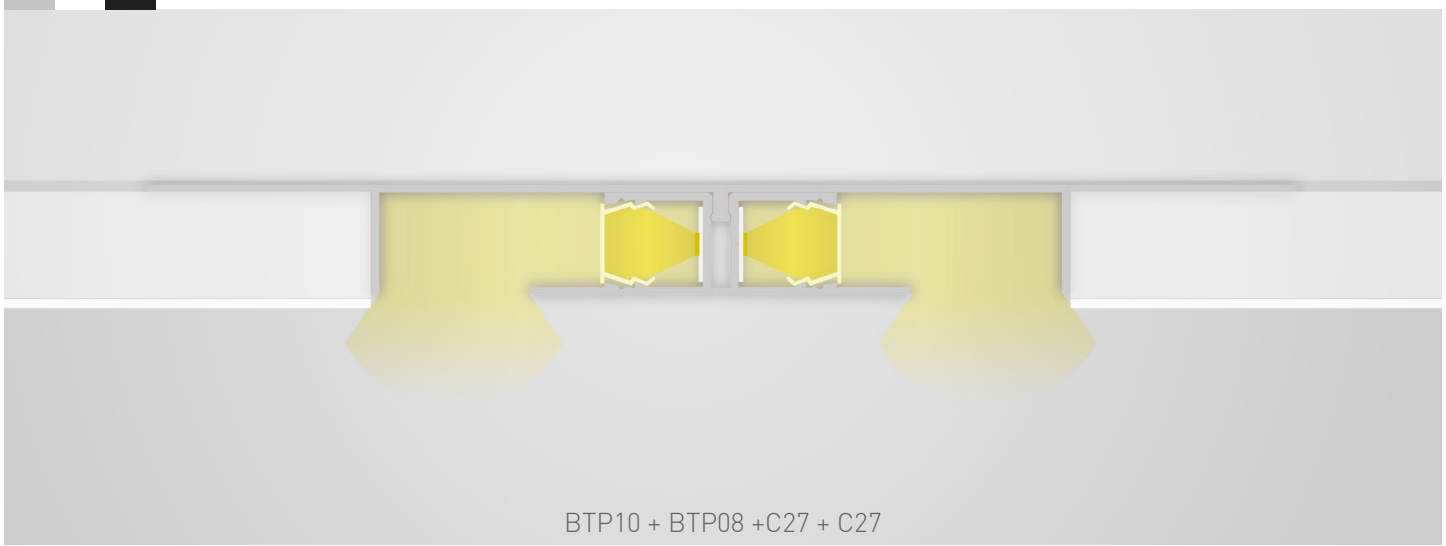

BTP10 + BTP08 +C27 + C27

	PERFIS | PROFILES		
BTP10	AL	G810-2047	
BTP10	WH	G810-3047	●
BTP10	BL	G810-2053	●
BTP08	AL	G810-2046	
BTP08	WH	G810-3046	●
BTP08	BL	G810-2052	●
	DIFUSORES | DIFFUSERS		
C27	65%	G860-0084	

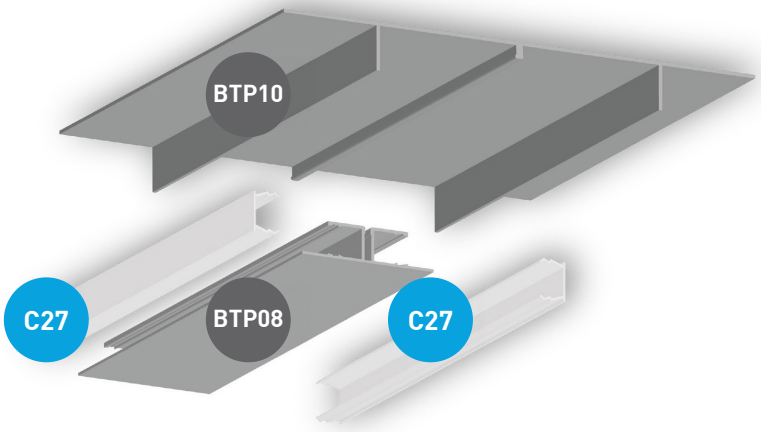

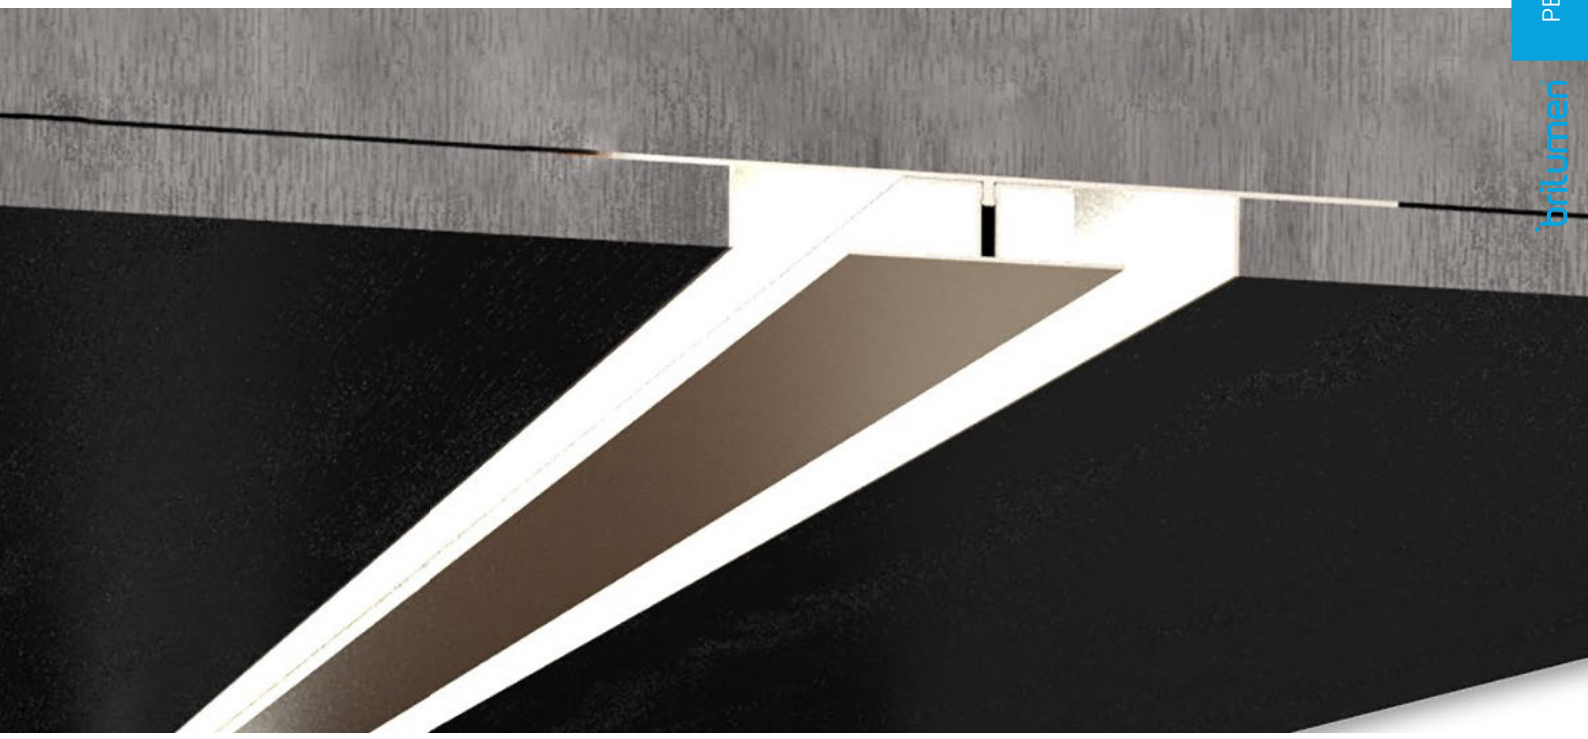

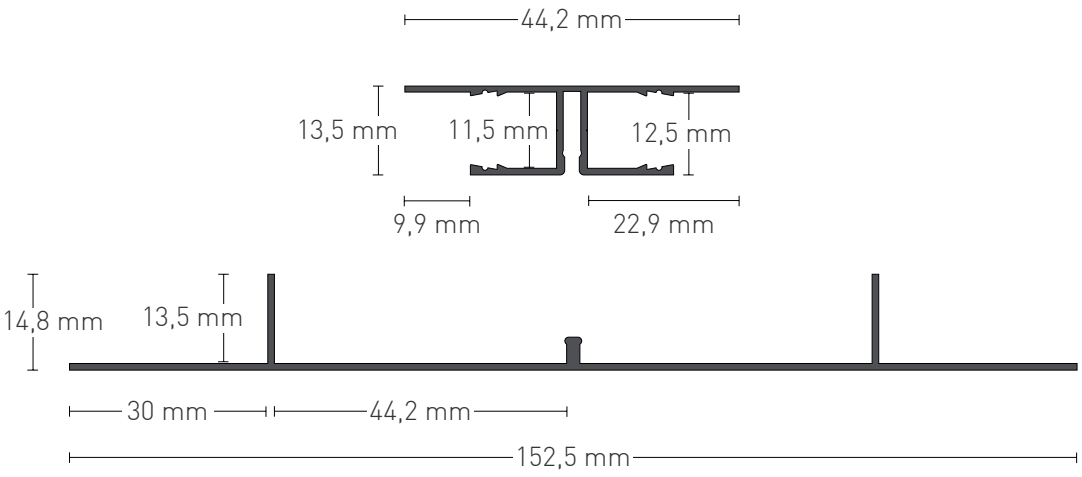

● Sob consulta | Under request

BTP11

GESSO CARTONADO | DRYWALL

11mm
WIDTH MAX.

273g/m
WEIGHT

1545g/m
WEIGHT

200cm
LENGTH

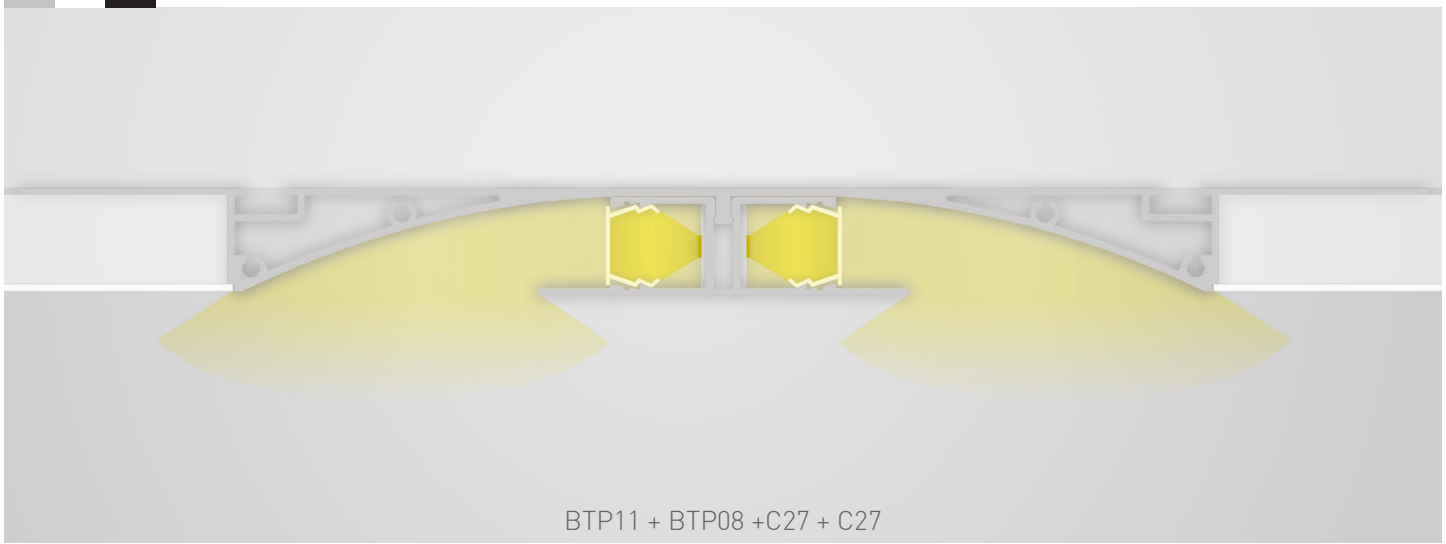

BTP11 + BTP08 +C27 + C27

	PERFIS | PROFILES		
BTP11	AL	G810-2048	
BTP11	WH	G810-3048	●
BTP11	BL	G810-2054	●
BTP08	AL	G810-2046	
BTP08	WH	G810-3046	●
BTP08	BL	G810-2052	●
	DIFUSORES | DIFFUSERS		
C27	65%	G860-0084	
	ACESSÓRIOS | ACCESSORIES		
Z10		G830-1504	
Z11		G830-1505	

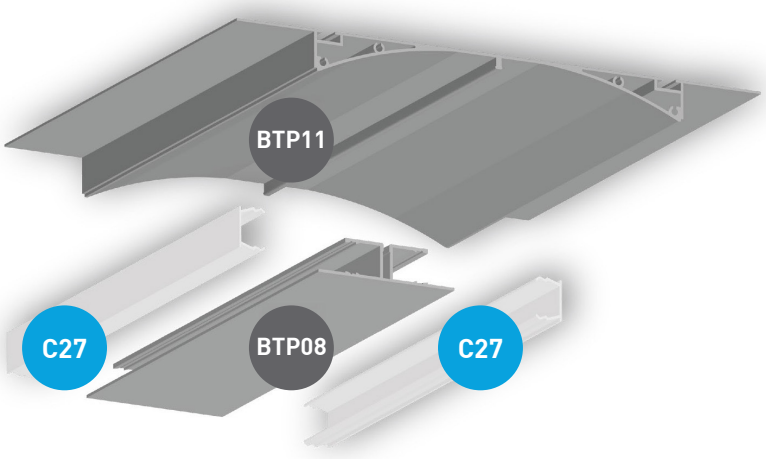

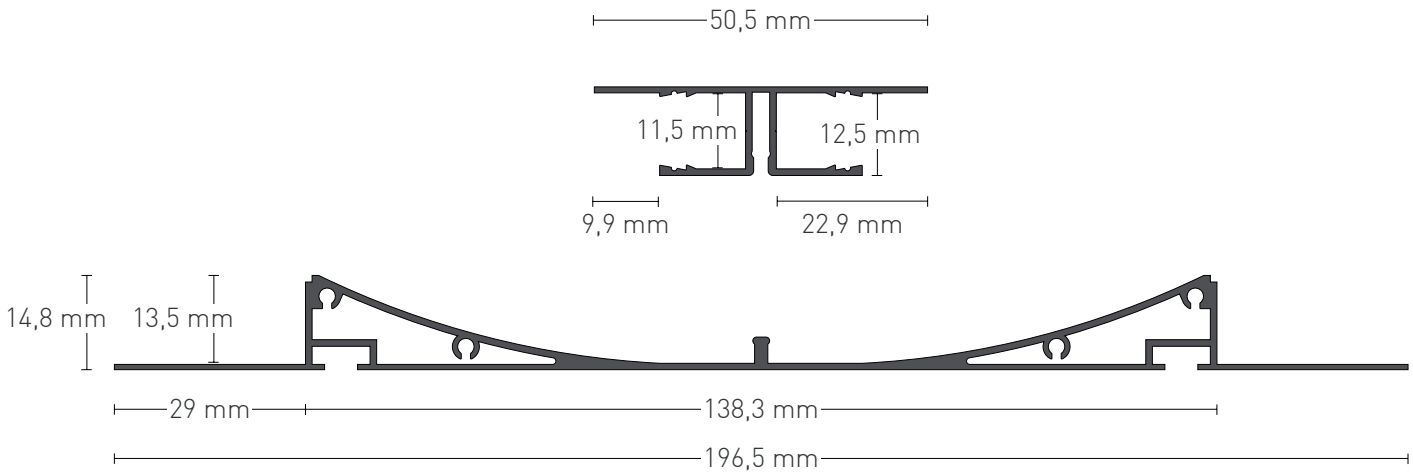

● Sob consulta | Under request

BTP12

GESSO CARTONADO | DRYWALL

11mm
WIDTH MAX.

KG
990g/m
WEIGHT

200cm
LENGTH



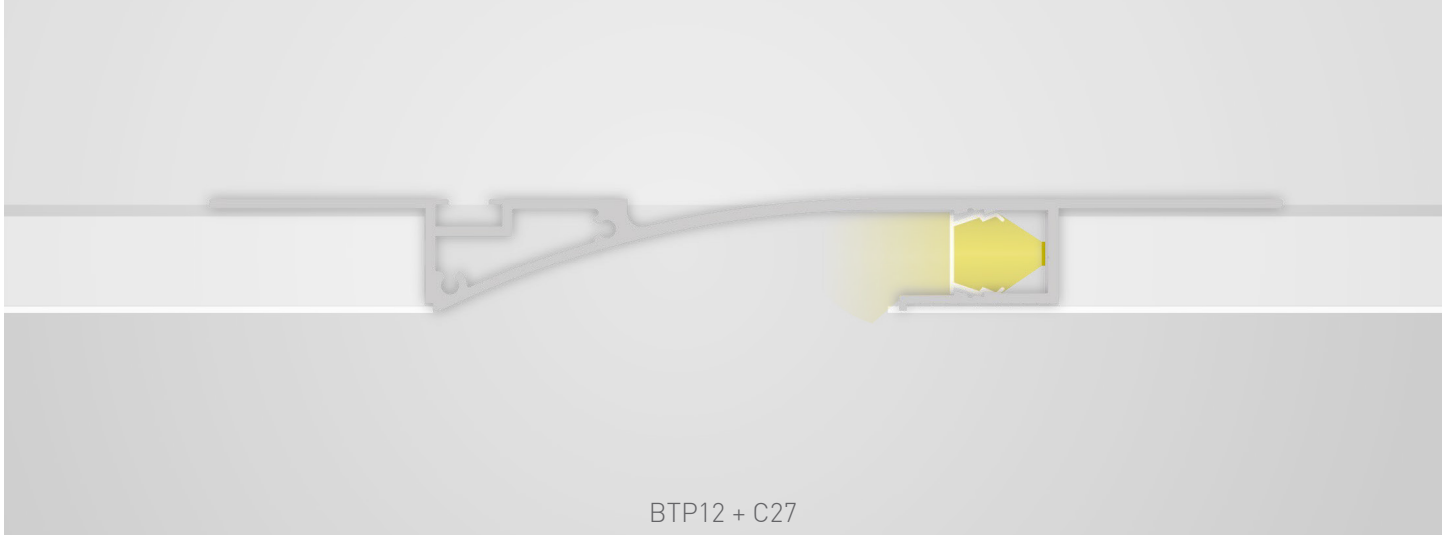

BTP12 + C27

PERFIS | PROFILES			
BTP12	AL	G810-2049	
BTP12	WH	G810-3049	●
BTP12	BL	G810-2055	●
DIFUSORES | DIFFUSERS			
C27	65%	G860-0084	
ACESSÓRIOS | ACCESSORIES			
Z10		G830-1504	
Z11		G830-1505	

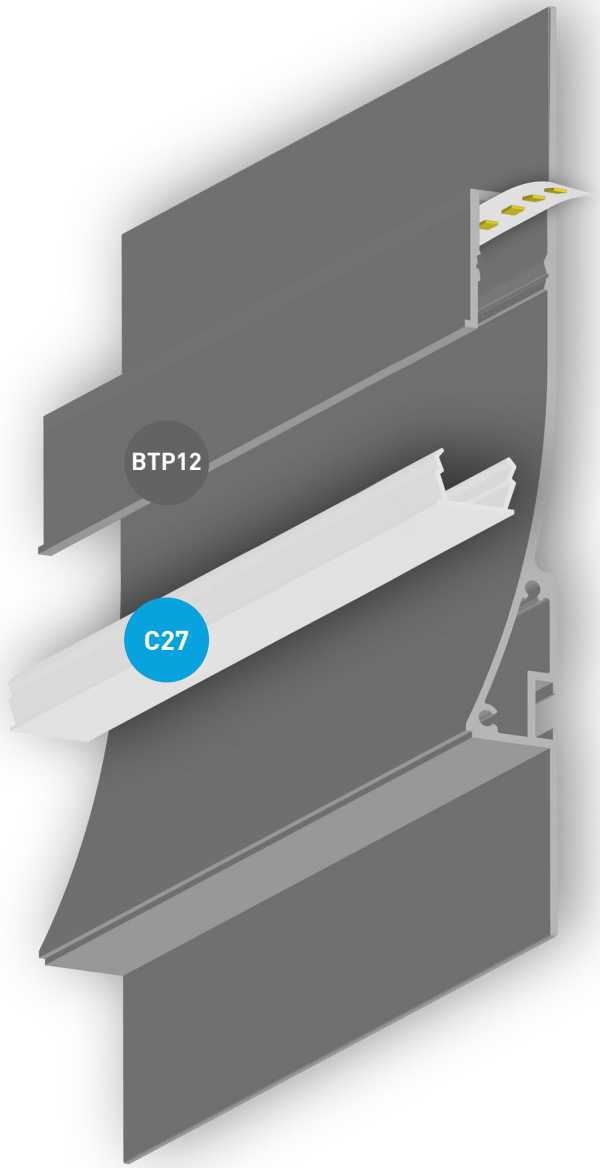

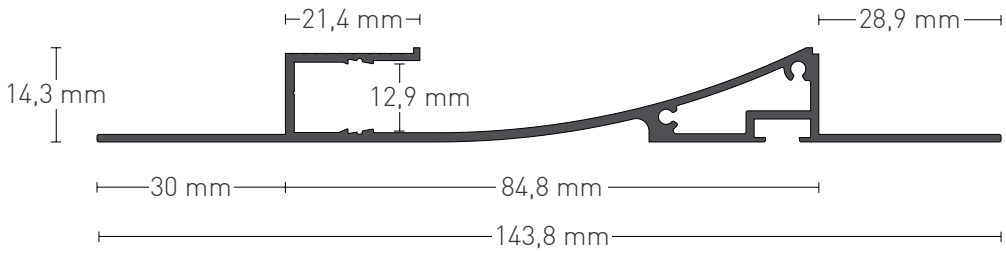

● Sob consulta | Under request

BTP13

GESSO CARTONADO | DRYWALL

21mm
WIDTH MAX.

544g/m
WEIGHT

200cm
LENGTH



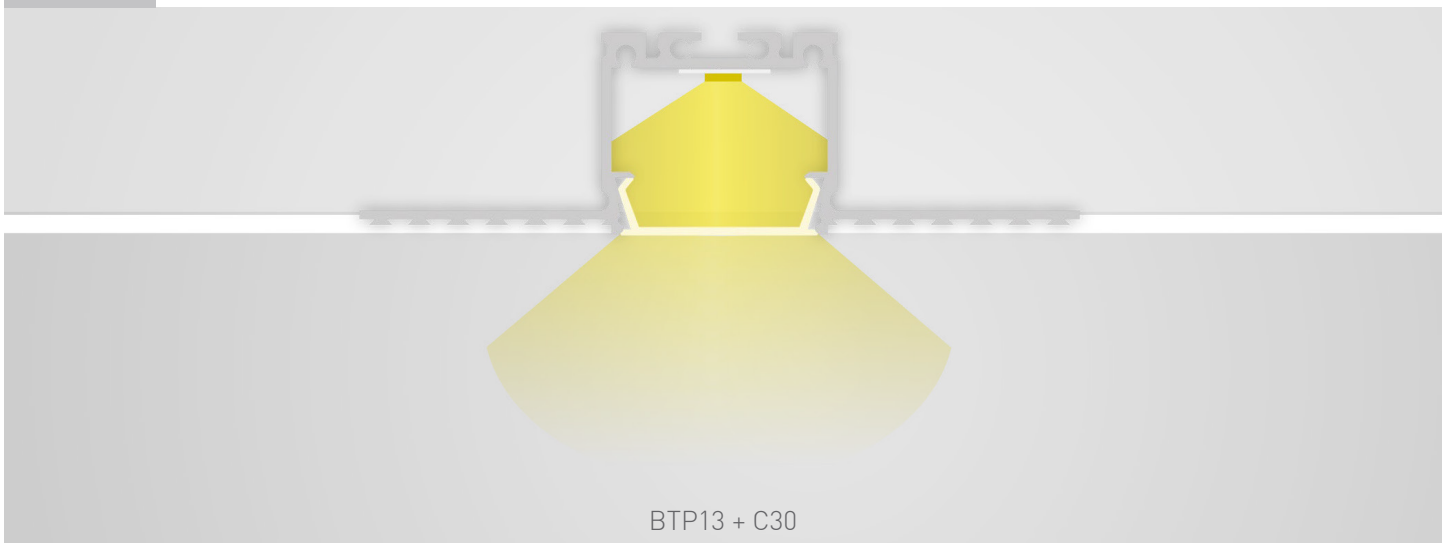

BTP13 + C30

PERFIS | PROFILES			
BTP13	AL	G810-3090	
DIFUSORES | DIFFUSERS			
C30	65%	G860-0077	
C47	75%	G860-0099	●
C11	65%	G860-0018	
C35	85%	G860-0063	●
C12	65%	G860-0019	
C31	85%	G860-0068	●
C13	65%	G860-0020	●
ACESSÓRIOS | ACCESSORIES			
C10S		G860-0066	
Z22		G830-1508	
Z23		G830-1509	

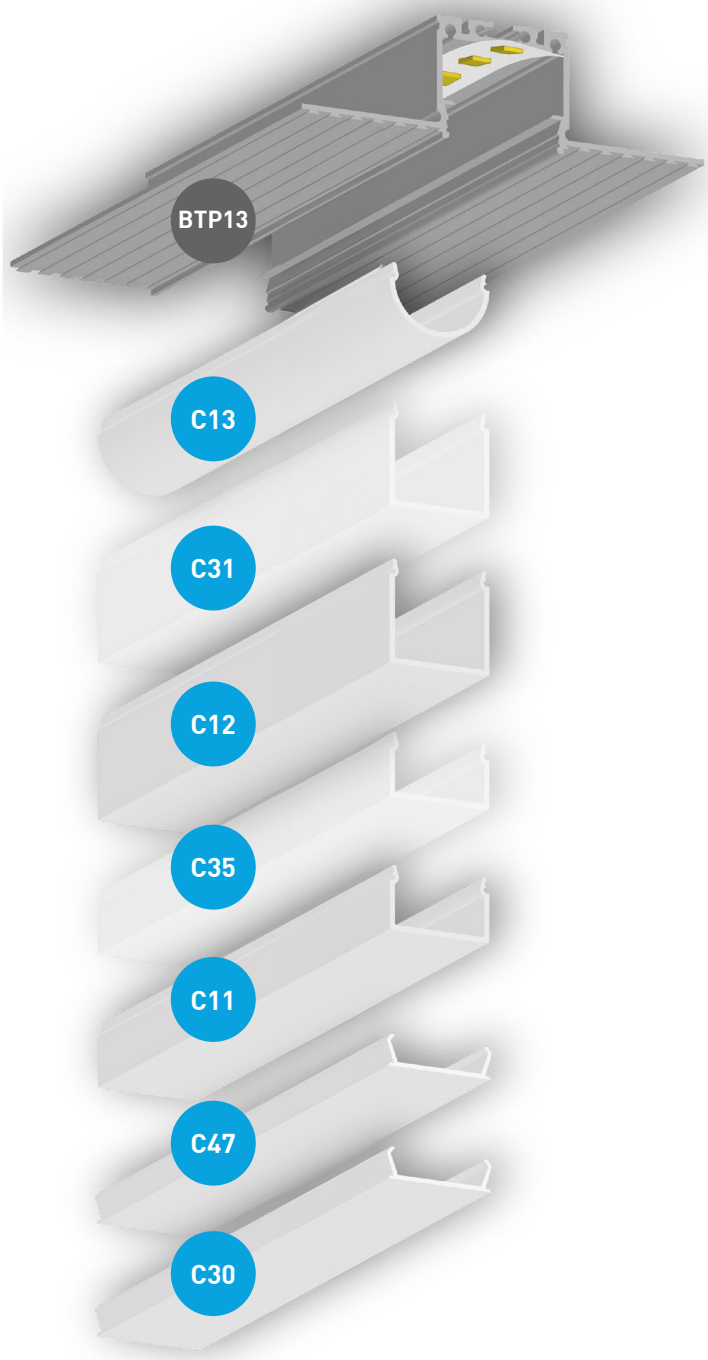

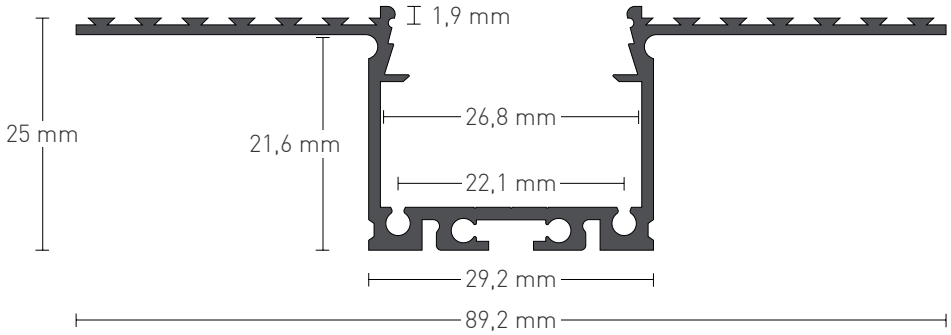

● Sob consulta | Under request

PERFIS DE ALUMÍNIO | ALUMINIUM PROFILES

AZULEJO | TILE

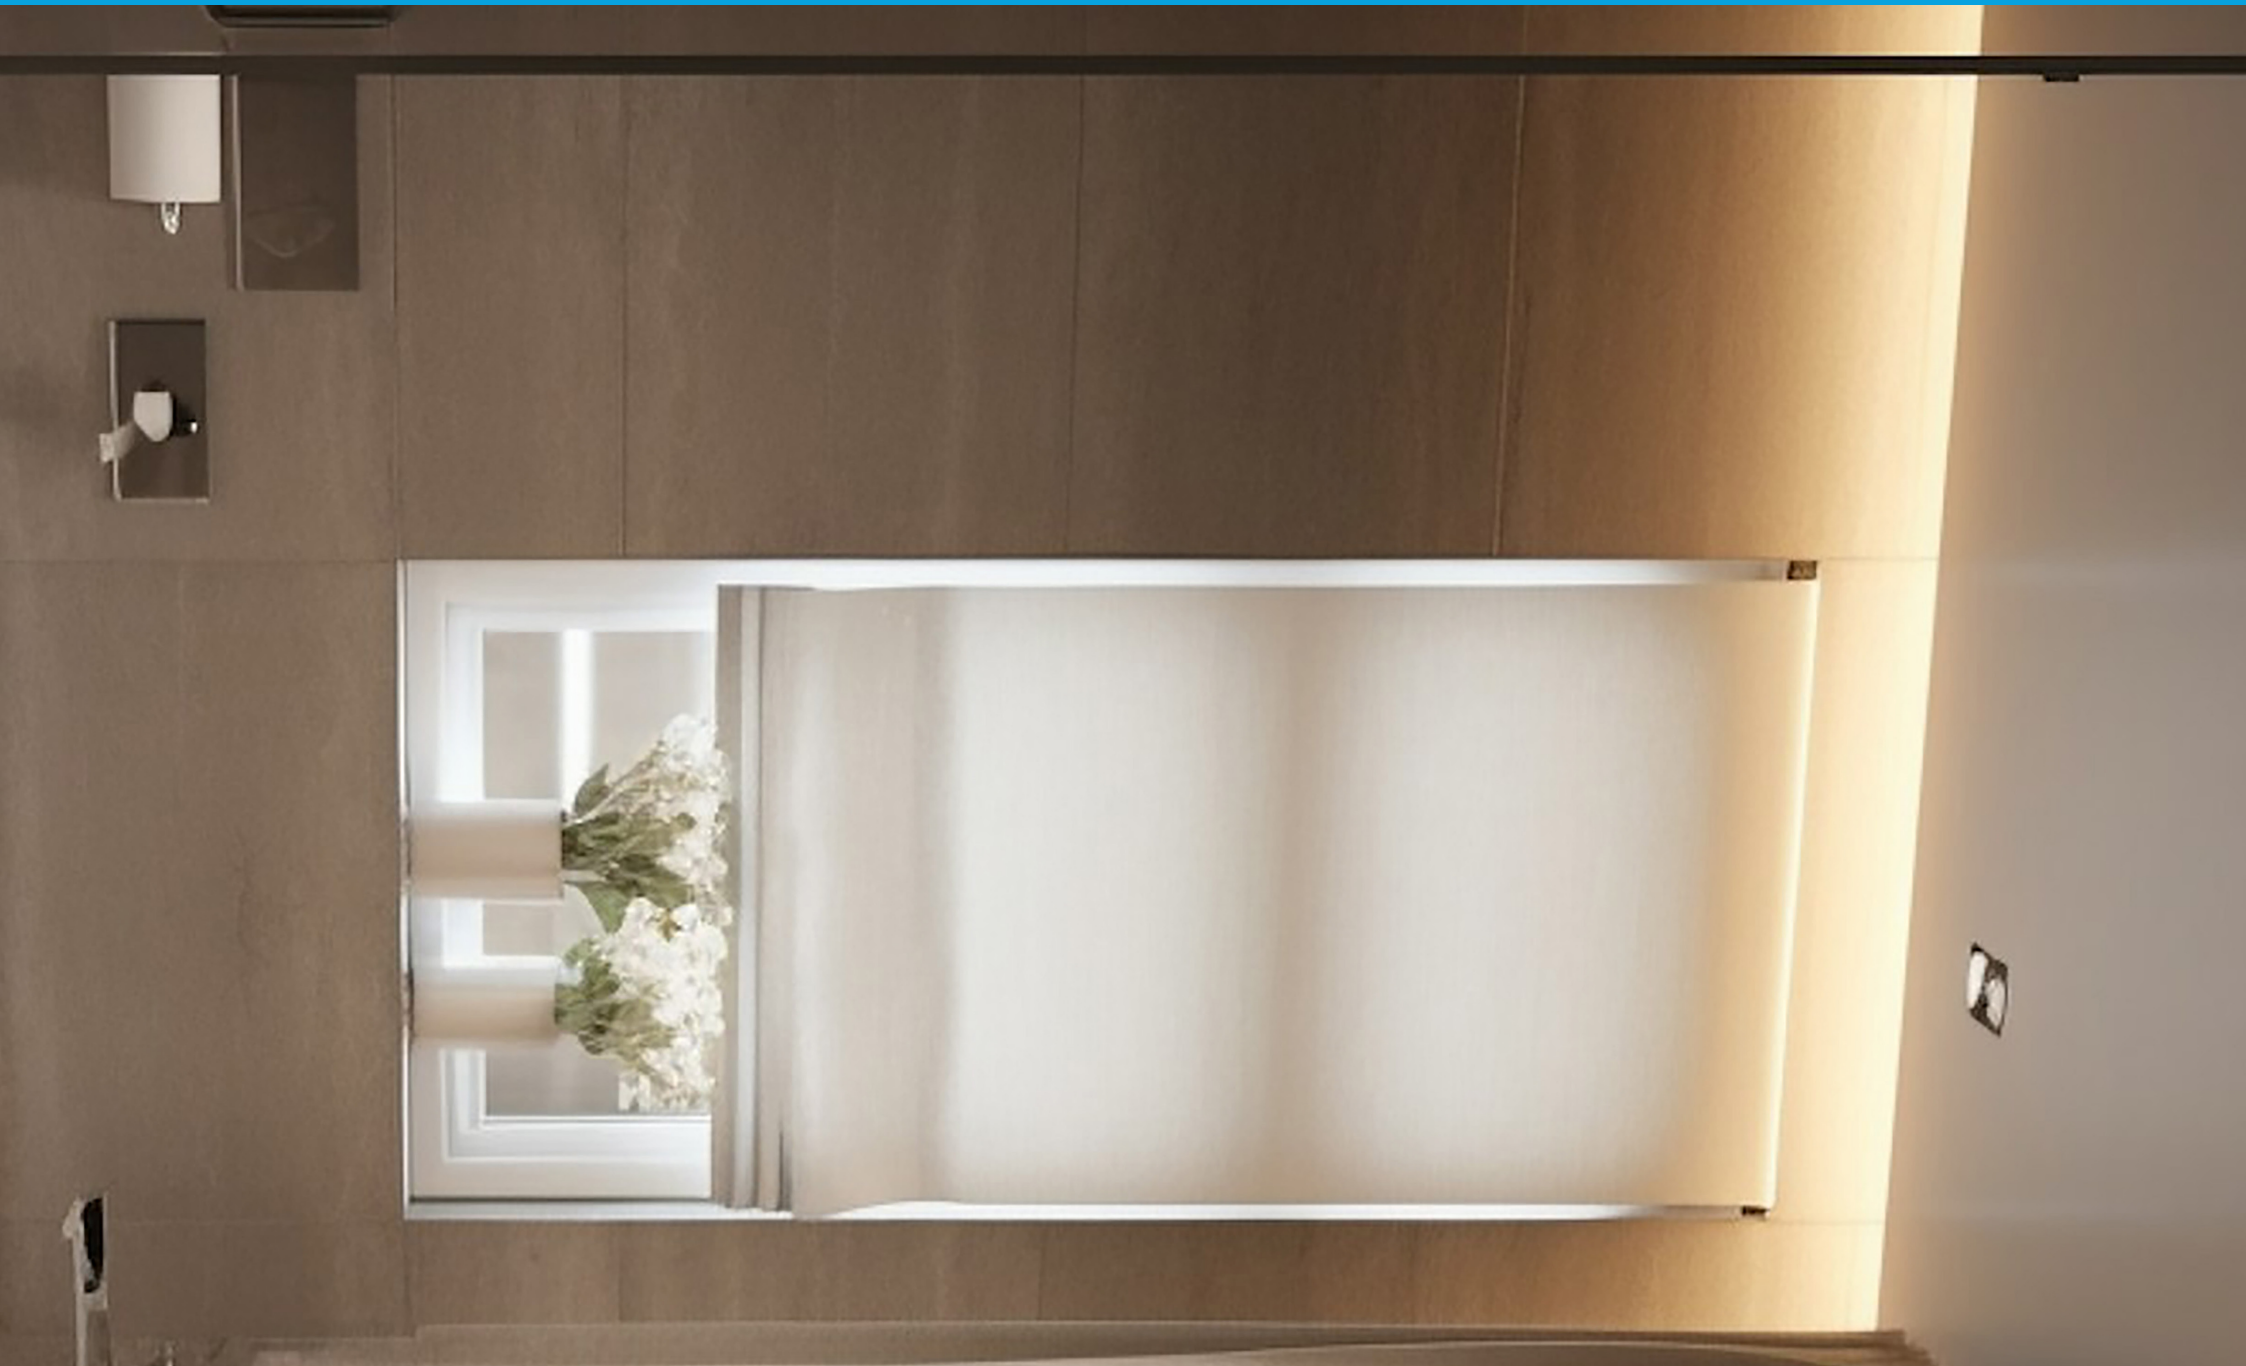



PF01

AZULEJO | TILE



12mm
WIDTH MAX.

KG
150g/m
WEIGHT

200cm
LENGTH

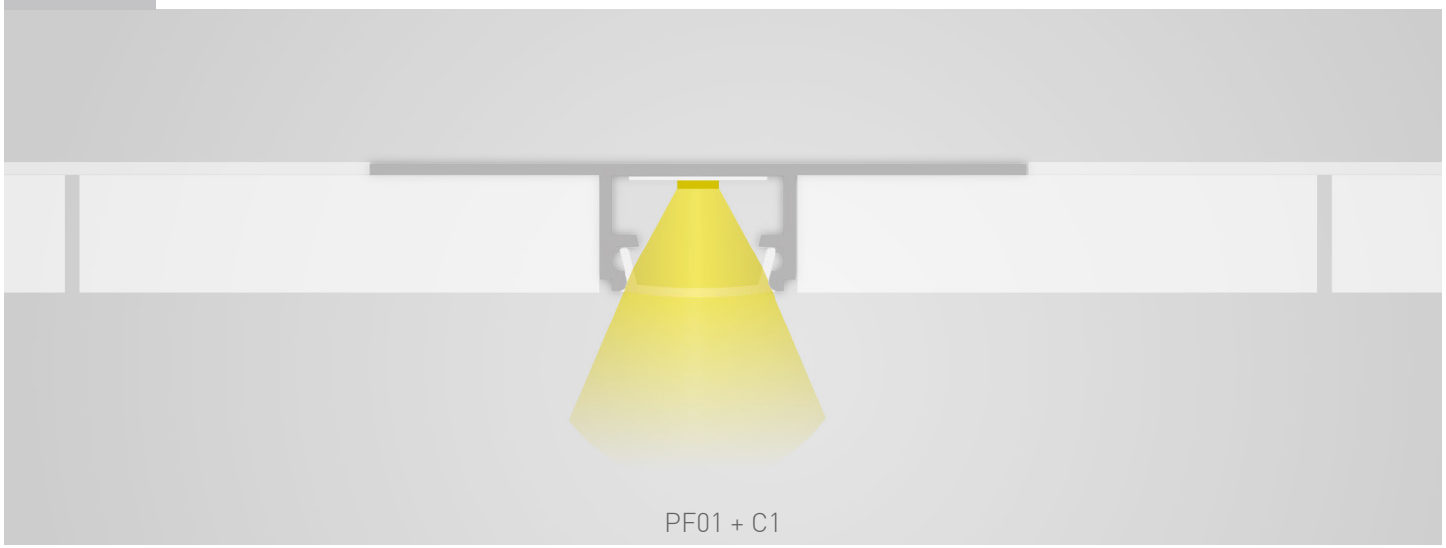

PF01 + C1

	PERFIS | PROFILES		
PF01	AL	G810-2032	
	DIFUSORES | DIFFUSERS		
C1	65%	G860-0004	
C2	85%	G860-0003	●
C58	75%	G860-0154	●
C32	25%	G860-0070	●
	TOPOS | END CAPS		
E200		G810-23001	
E201		G810-23002	
	ACESSÓRIOS | ACCESSORIES		
C1S		G860-0065	

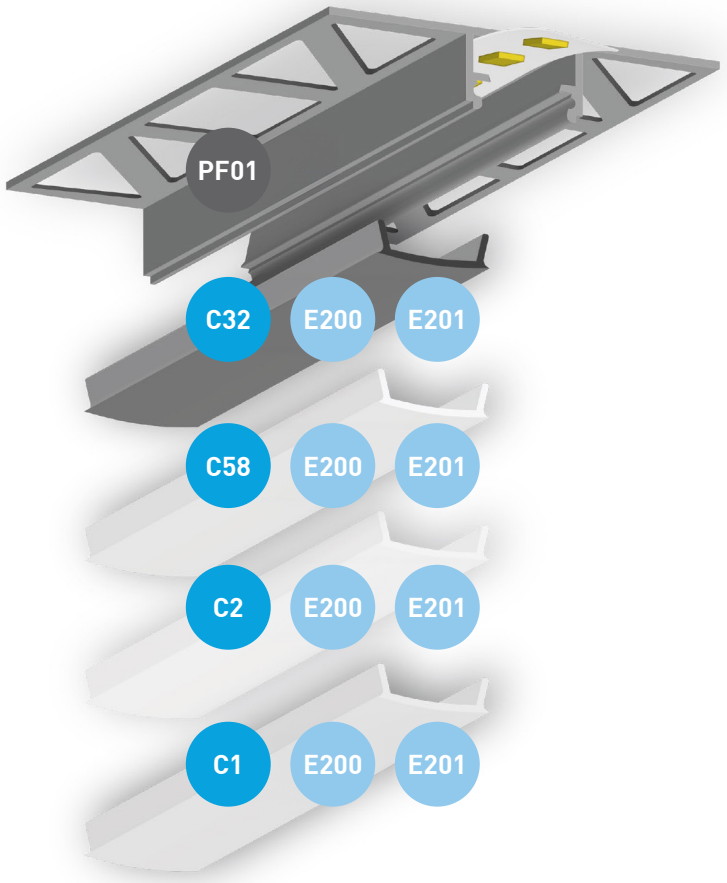

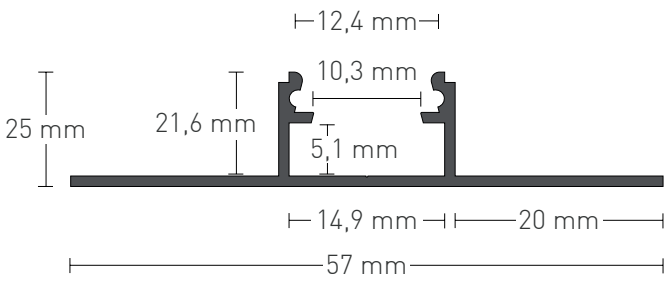

● Sob consulta | Under request

PF02

AZULEJO | TILE



12mm
WIDTH MAX.

KG
140g/m
WEIGHT

200cm
LENGTH

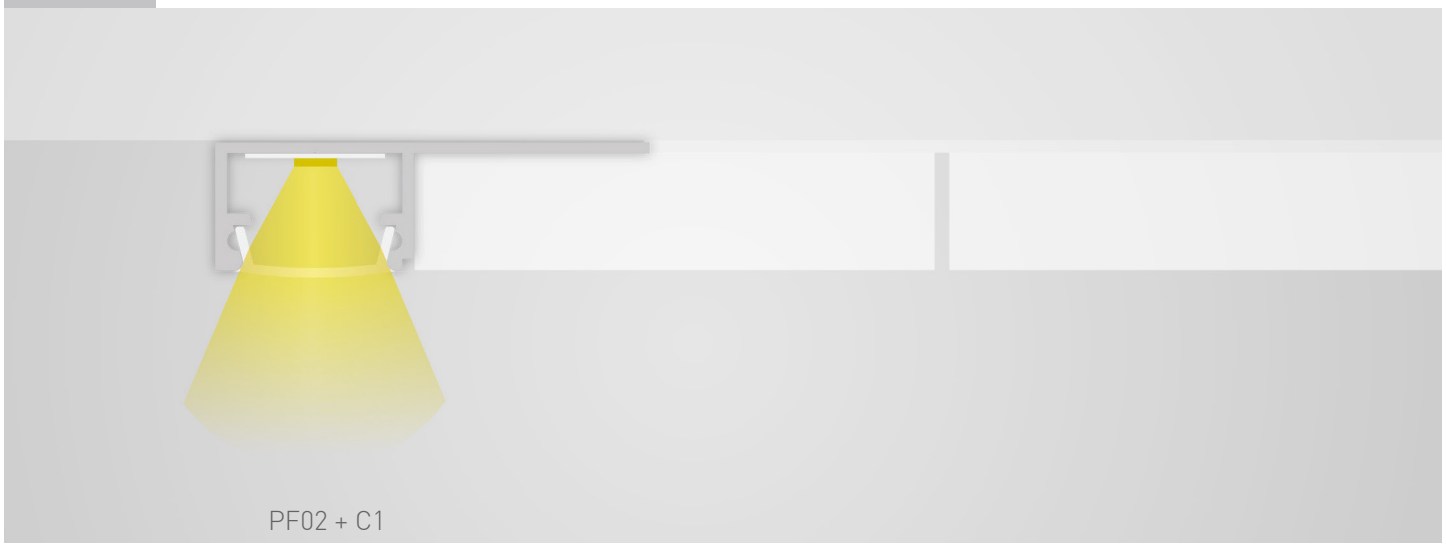

PF02 + C1

	PERFIS | PROFILES		
PF02	AL	G810-2034	
	DIFUSORES | DIFFUSERS		
C1	65%	G860-0004	
C2	85%	G860-0003	●
C58	75%	G860-0154	●
C32	25%	G860-0070	●
	TOPOS | END CAPS		
E202 		G810-23003	
E203 		G810-23004	
	ACESSÓRIOS | ACCESSORIES		
C1S 		G860-0065	

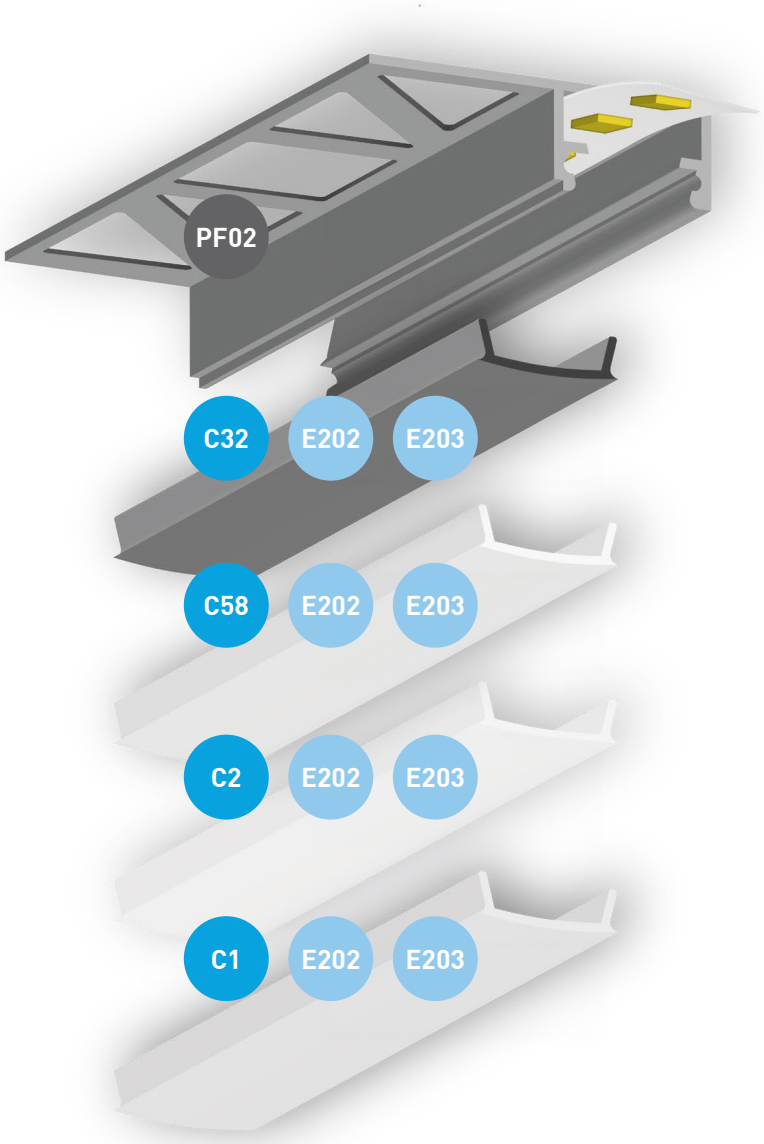

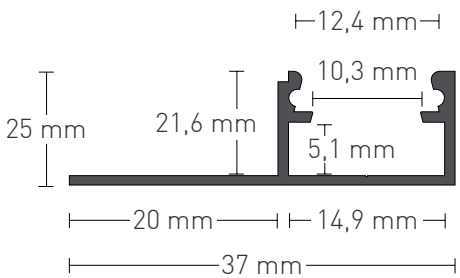

● Sob consulta | Under request

PF03

AZULEJO | TILE



8mm
WIDTH MAX.

86g/m
WEIGHT

200cm
LENGTH



PF03 + C23

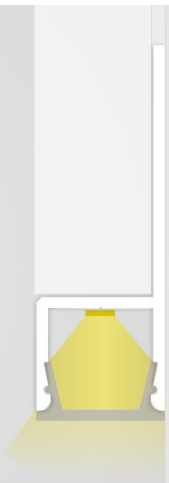

PF03 + C34

PERFIS | PROFILES			
PF03	AL	G812-3174	
PF03	WH	G812-3322	●
DIFUSORES | DIFFUSERS			
C23	65%	G860-0046	
C34	25%	G860-0074	●
TOPOS | END CAPS			
E218		G810-2319	
E218W		G830-4022	●
E219		G810-2320	
E219W		G830-4023	●

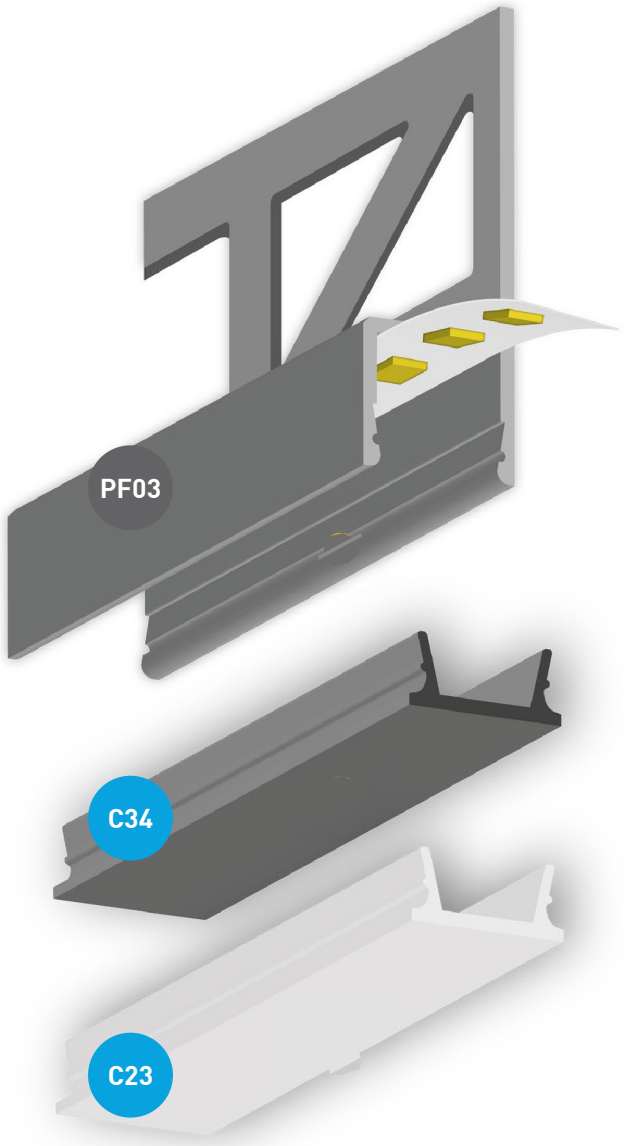

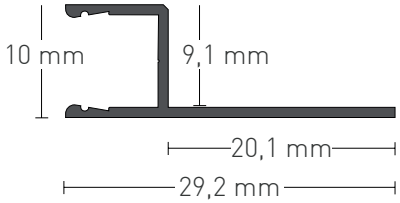

● Sob consulta | Under request

PF04

AZULEJO | TILE



10mm
WIDTH MAX.

KG
129g/m
WEIGHT

200cm
LENGTH



PF04 + C34



PF04 + C23

	PERFIS | PROFILES		
PF04	AL	G812-3176	
PF04	WH	G812-3320	●
	DIFUSORES | DIFFUSERS		
C23	65%	G860-0046	
C34	25%	G860-0074	●
	TOPOS | END CAPS		
E220		G810-2321	
E220W		G830-4024	●
E221		G810-2322	
E221W		G830-4025	●

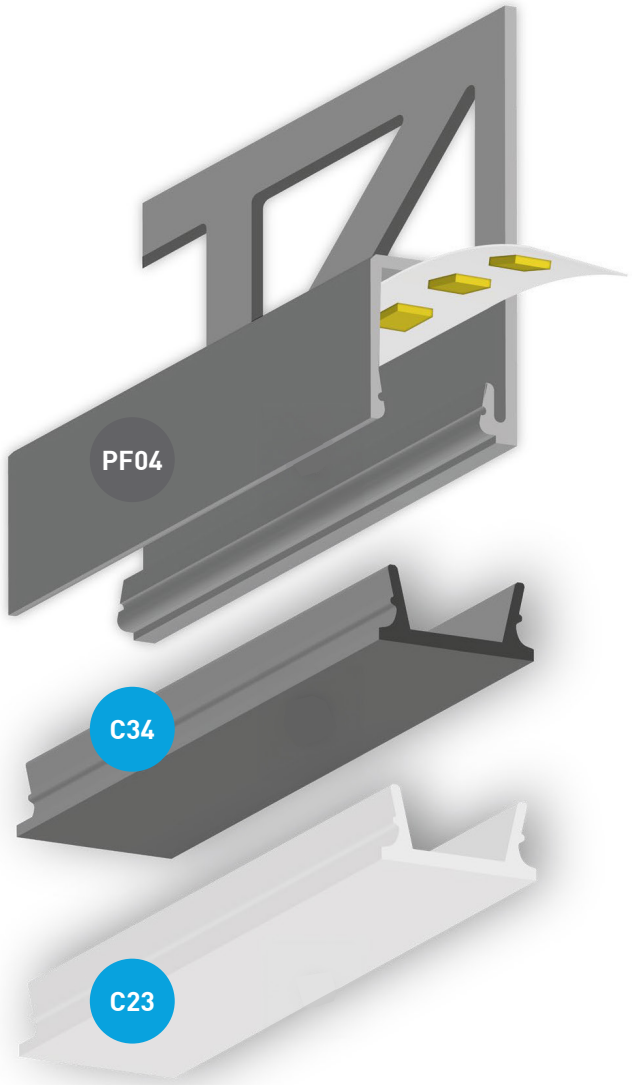

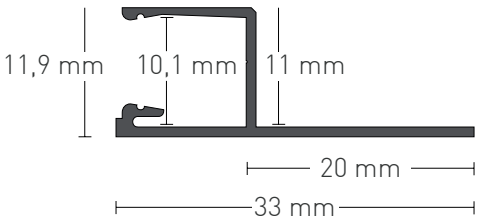

● Sob consulta | Under request

PF05

AZULEJO | TILE



12mm
WIDTH MAX.

KG
224g/m
WEIGHT

200cm
LENGTH

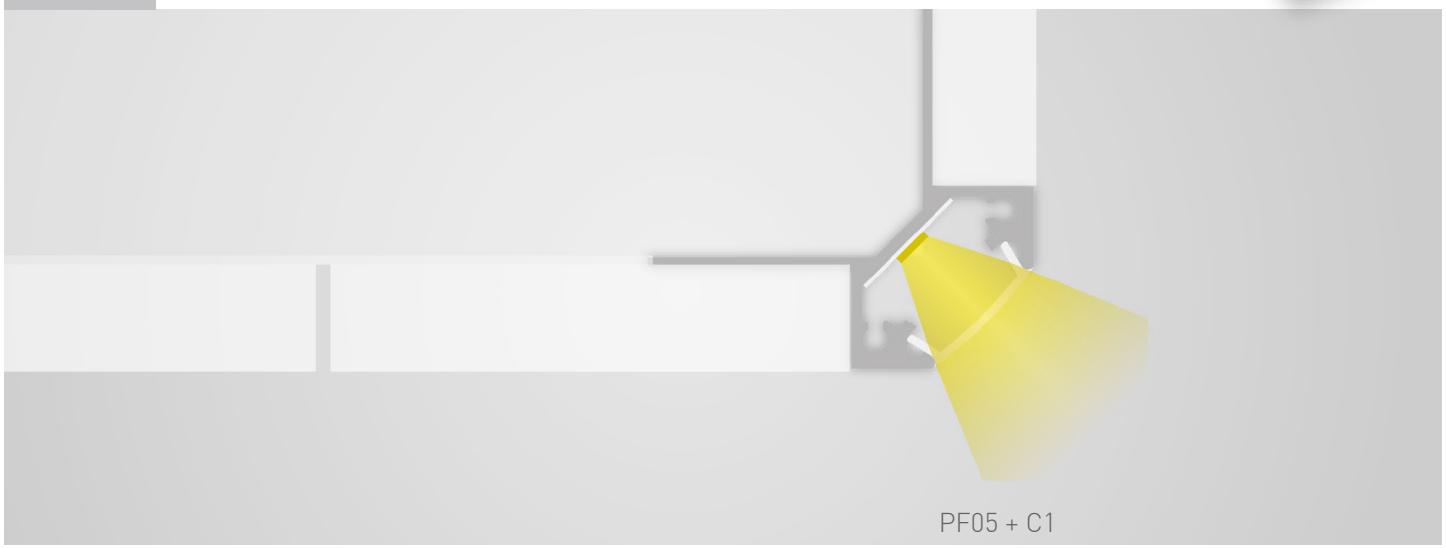

PF05 + C1

	PERFIS | PROFILES		
PF05	AL	G810-2036	
	DIFUSORES | DIFFUSERS		
C1	65%	G860-0004	
C2	85%	G860-0003	●
C58	75%	G860-0154	●
C32	25%	G860-0070	●
	TOPOS | END CAPS		
E204		G810-23005	
E205		G810-23006	
	ACESSÓRIOS | ACCESSORIES		
C1S		G860-0065	

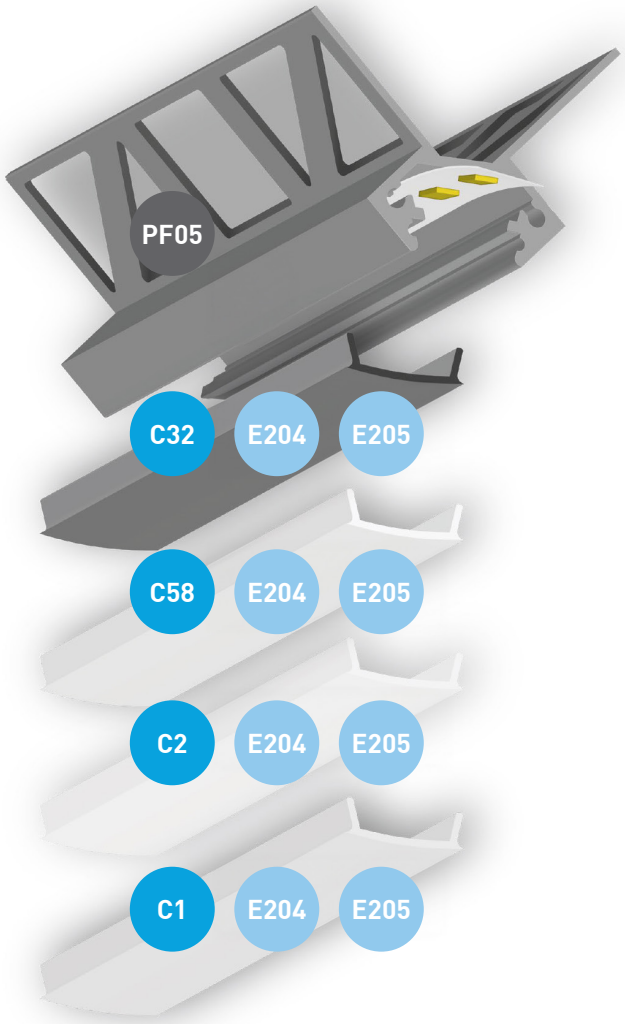

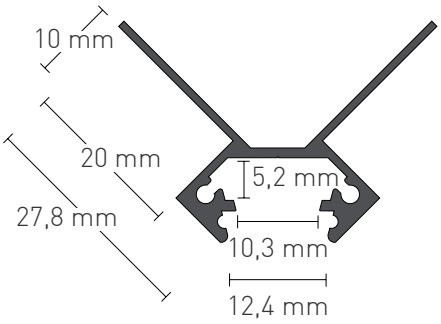

● Sob consulta | Under request

PF08 V2

AZULEJO | TILE



12mm
WIDTH MAX.

403g/m
WEIGHT

200cm
LENGTH

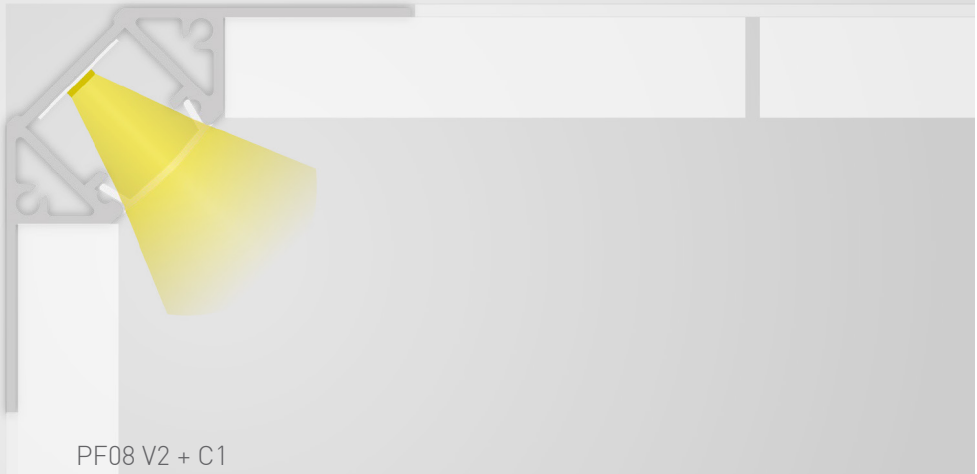

PF08 V2 + C1

PERFIS | PROFILES			
PF08 V2	AL	G810-2230	
DIFUSORES | DIFFUSERS			
C1	65%	G860-0004	
C2	85%	G860-0003	●
C58	75%	G860-0154	●
C32	25%	G860-0070	●
TOPOS | END CAPS			
E206 		G810-23007	
E207 		G810-23008	
ACESSÓRIOS | ACCESSORIES			
C1S 		G860-0065	

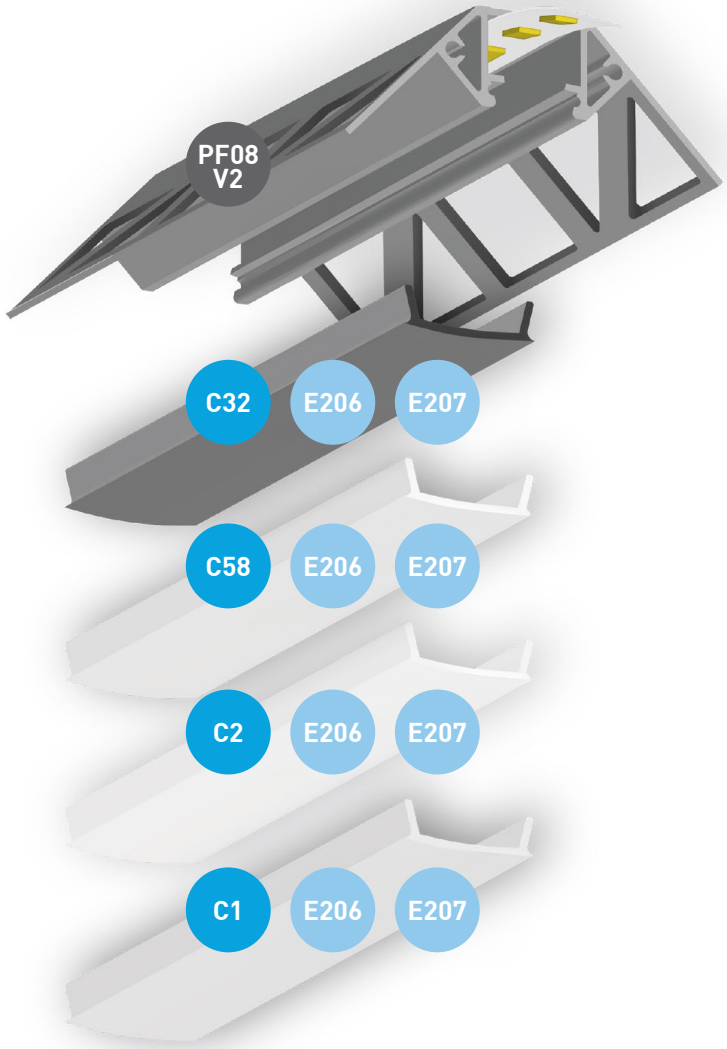

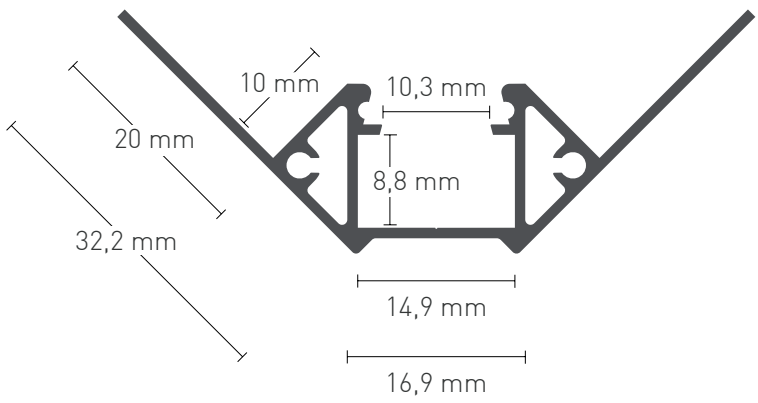

● Sob consulta | Under request

PERFIS DE ALUMÍNIO | ALUMINIUM PROFILES

ESPECIAL | SPECIAL



NP33

DISSIPADOR | COOLING



14mm
WIDTH MAX.

77g/m
WEIGHT

200cm
LENGTH

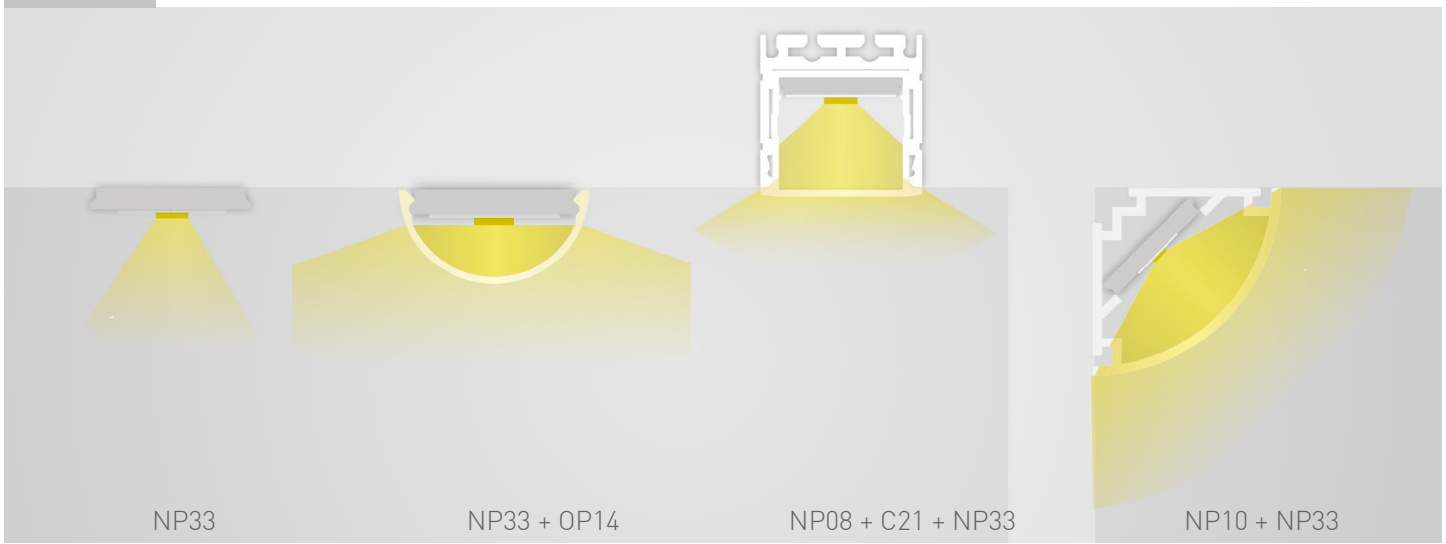

NP33 | NP33 + OP14 | NP08 + C21 + NP33 | NP10 + NP33

NP33	PERFIS | PROFILES	
	AL	G810-5050

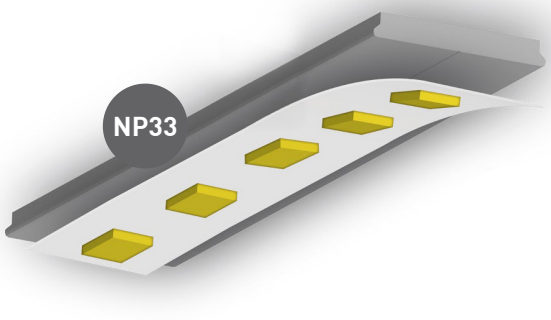





PB02

PAVIMENTO | WALKABLE



12mm
WIDTH MAX.

110g/m
WEIGHT

200cm
LENGTH



PB02 + C57

	PERFIS | PROFILES		
PB02	AL		**G810-2083**
	DIFUSORES | DIFFUSERS		
C57	65%		**G860-0137**
	TOPOS | END CAPS		
E98	WH		**G830-4014**
E99	WH		**G830-4047**

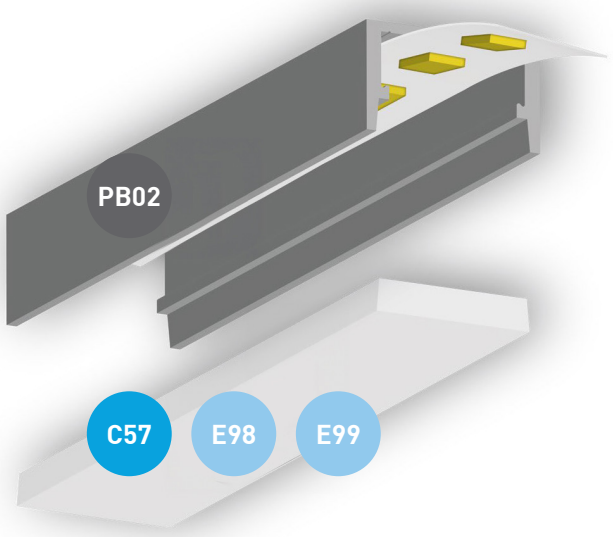





PM01

MOBILIÁRIO | FURNITURE



6mm
WIDTH MAX.

155g/m
WEIGHT

200cm
LENGTH

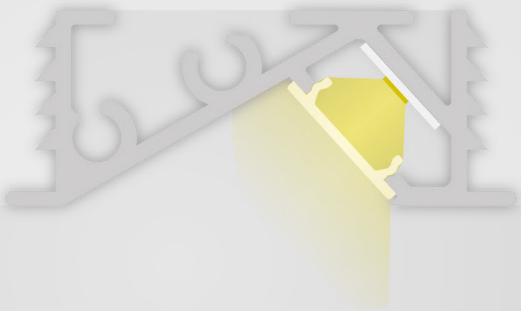

PM01 + C24

	PERFIS | PROFILES		
PM01	AL	G812-3168	
PM01	WH	G812-3170	●
PM01	BL	G812-3169	●
	DIFUSORES | DIFFUSERS		
C24	65%	G860-0106	
	TOPOS | END CAPS		
E95	AL	G812-3197	
	WH	G812-3199	●
	BL	G812-3198	●
	ACESSÓRIOS | ACCESSORIES		
Z37		G812-3202	

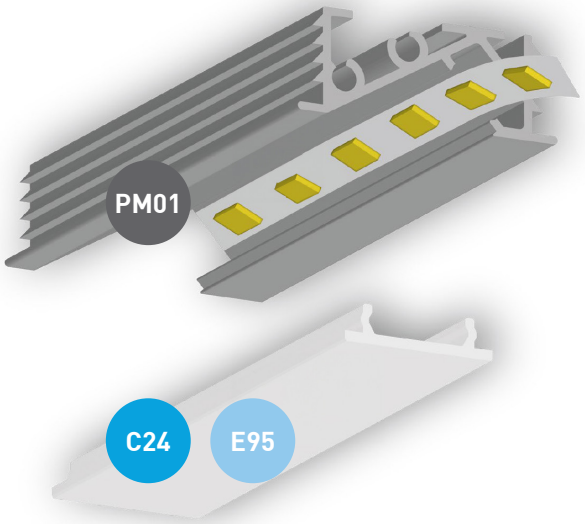



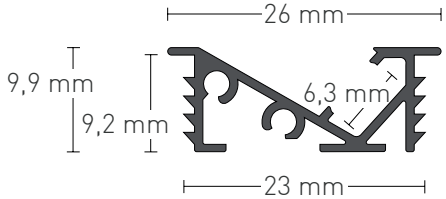

● Sob consulta | Under request

PM02

MOBILIÁRIO | FURNITURE



6mm
WIDTH MAX.

153g/m
WEIGHT

200cm
LENGTH

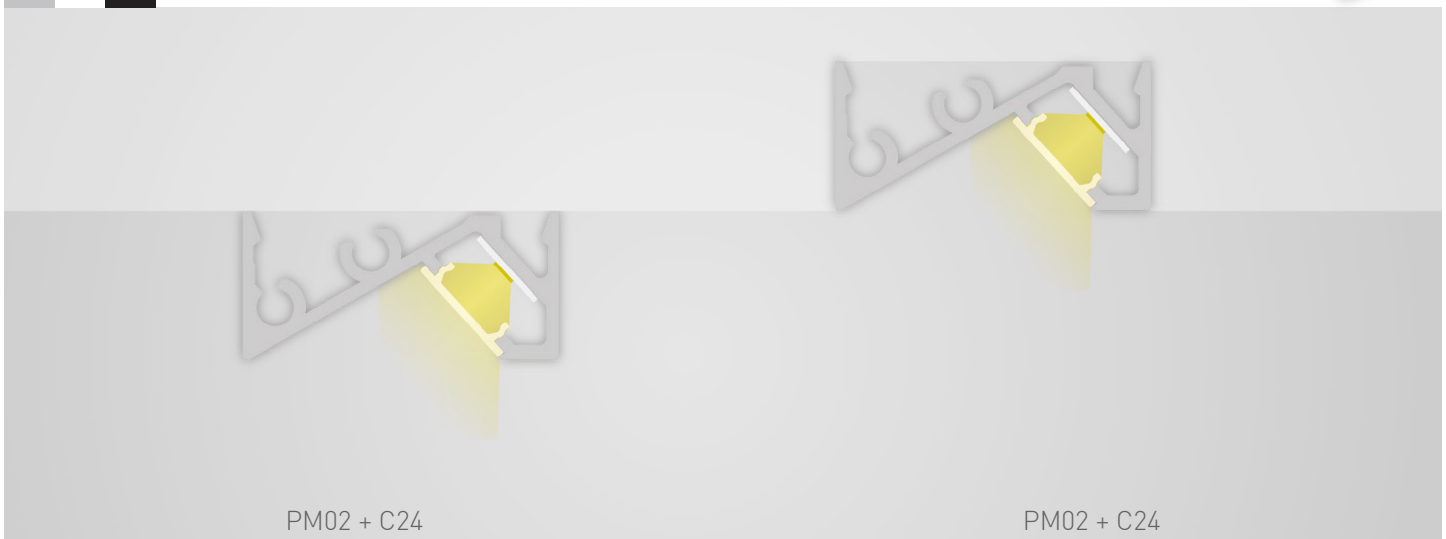

PM02 + C24

PM02 + C24

	PERFIS | PROFILES		
PM02	AL	G812-3171	
PM02	WH	G812-3173	●
PM02	BL	G812-3172	●
	DIFUSORES | DIFFUSERS		
C24	65%	G860-0106	
	TOPOS | END CAPS		
E95	AL	G812-3197	
	WH	G812-3199	●
	BL	G812-3198	●
	ACESSÓRIOS | ACCESSORIES		
Z37		G812-3202	

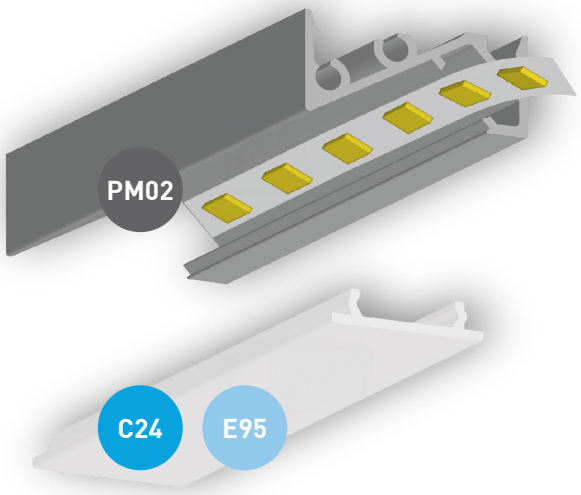





● Sob consulta | Under request

PS01

ESCADAS | STAIRS



13mm
WIDTH MAX.

497g/m
WEIGHT

200cm
LENGTH

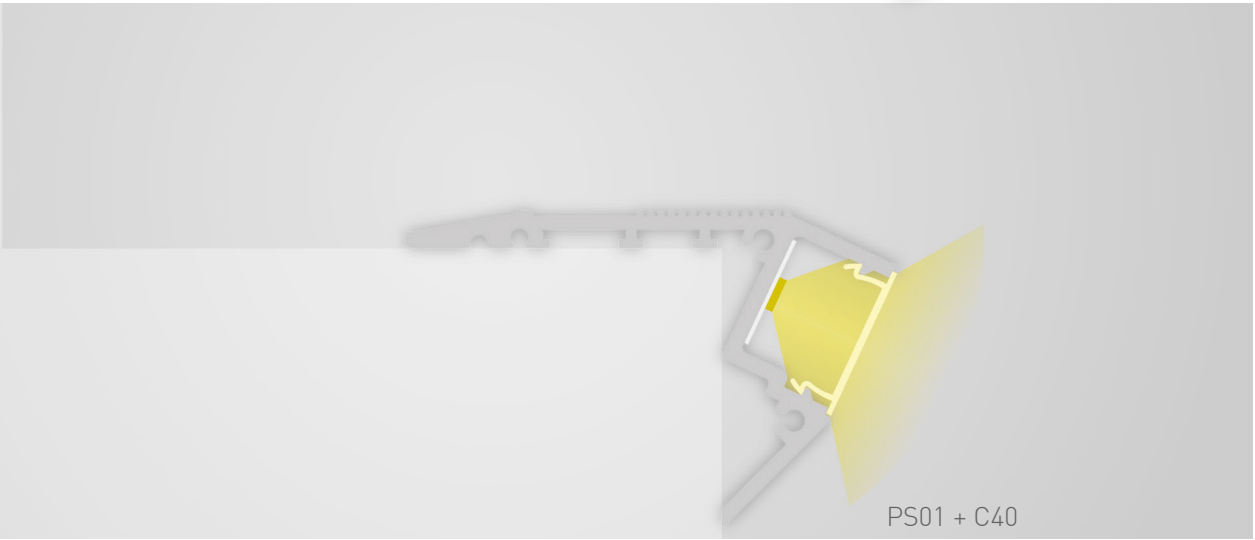

PS01 + C40

PERFIS | PROFILES		
PS01	AL	G812-2100
DIFUSORES | DIFFUSERS		
C40	65%	G860-0085
C41	85%	G860-0088 ●
C48	85%	G860-0100 ●
C53	75%	G860-0155 ●
TOPOS | END CAPS		
E83	AL	G812-2151

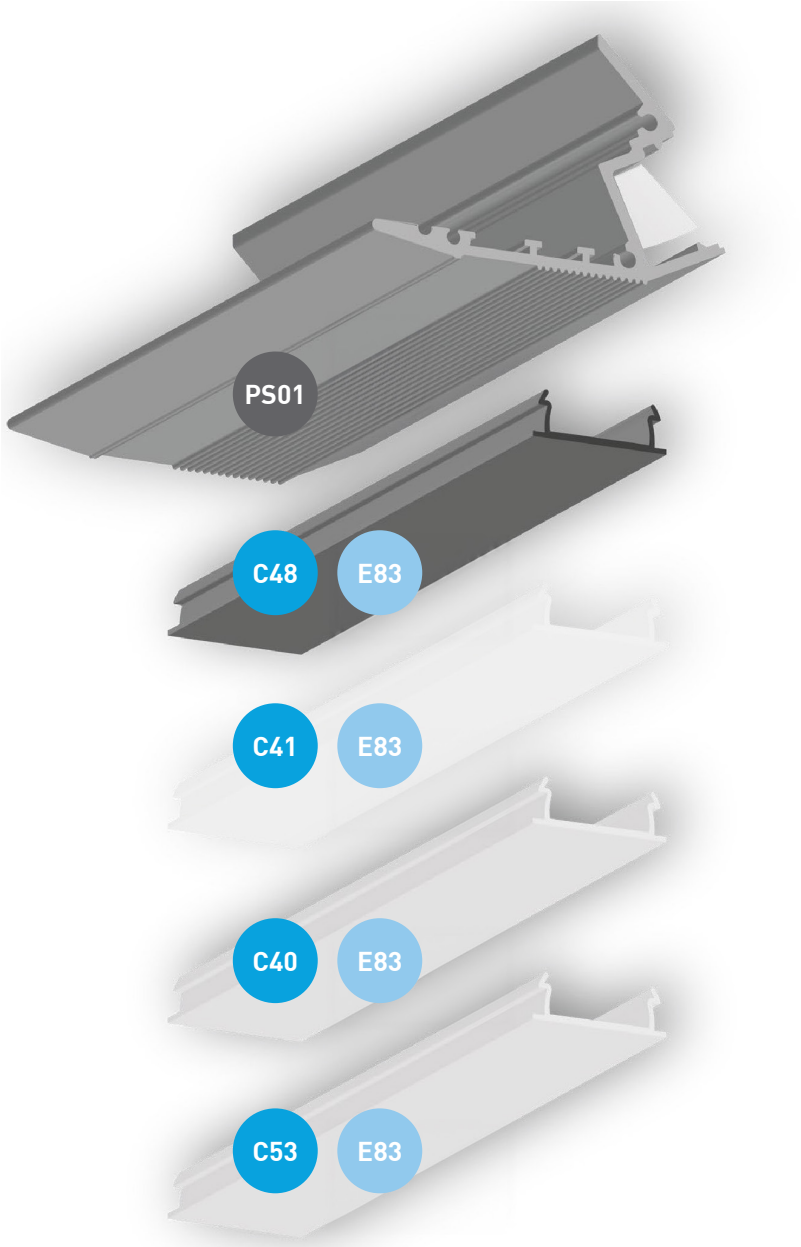

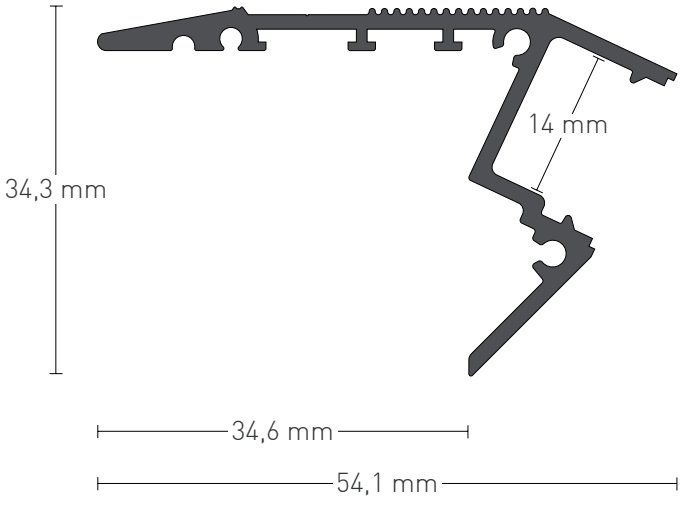

● Sob consulta | Under request

FONTES E CONTROLADORES | POWER SUPPLY AND CONTROLLERS

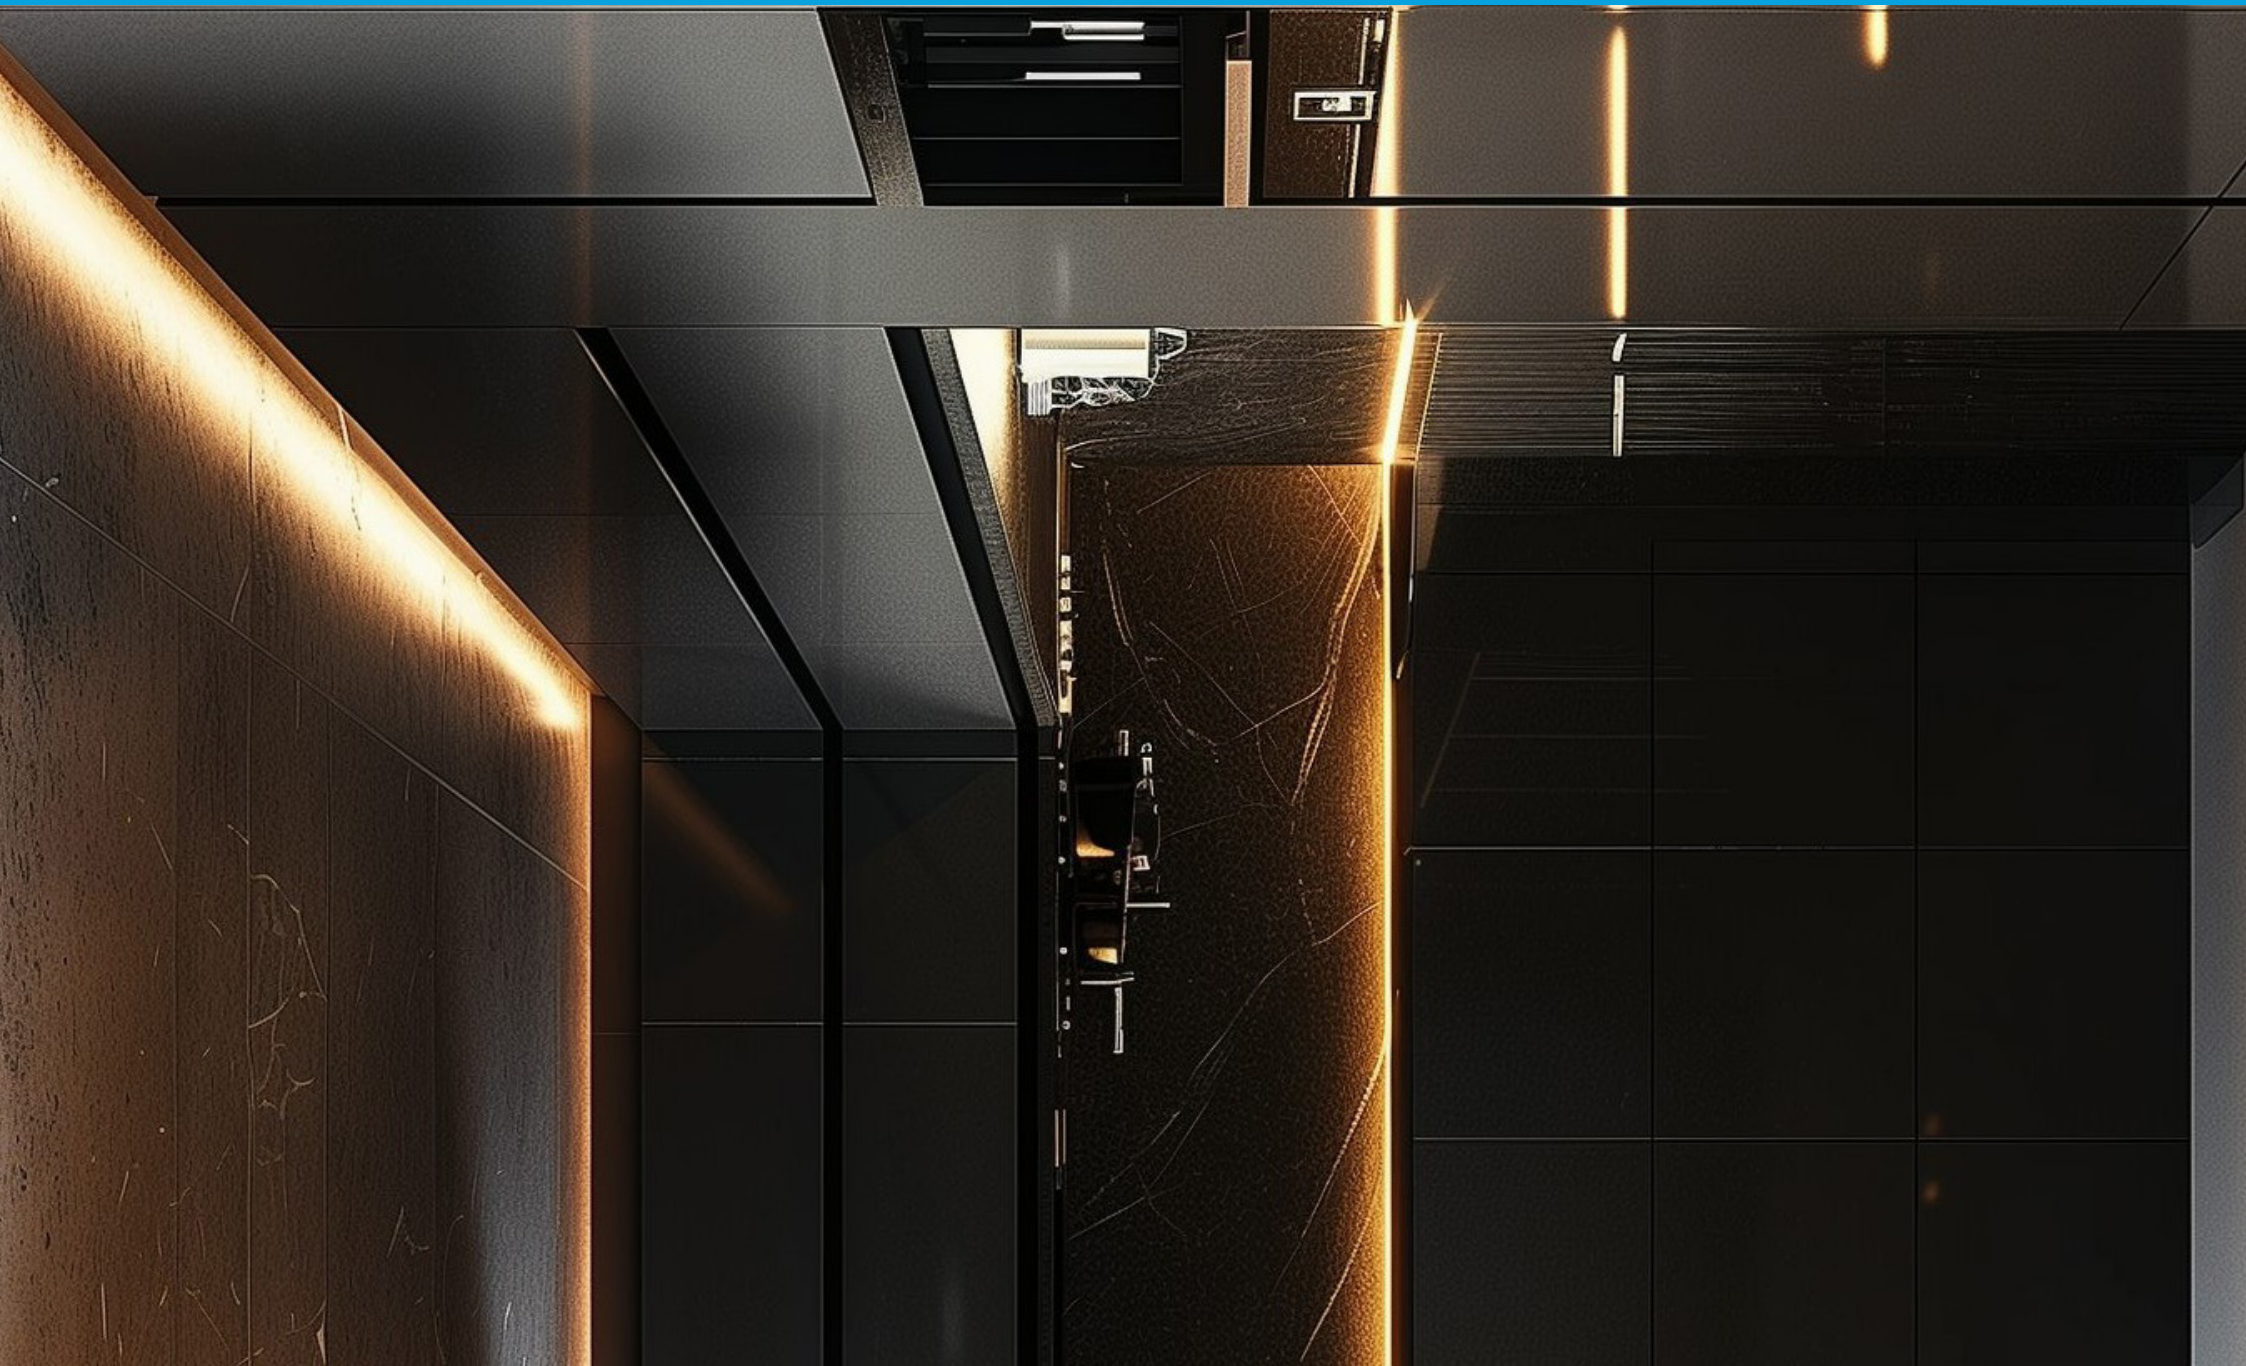



FONTES ALIMENTAÇÃO
POWER SUPPLY



IP20 | CLASS I | 3 YEARS WARRANTY | CE

DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	ON/OFF	24V	25 W	8011-2404
			60 W	8011-2419
			100 W	8011-2420
			150 W	8011-2421
			200 W	8011-2422
			250 W	8011-2423



IP20 | CLASS II | 5 YEARS WARRANTY | CE

DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	ON/OFF	24V	30 W	8011-2425
			60 W	8011-2426
			120 W	8011-2427
			180 W	8011-2428



IP20 | CLASS II | 5 YEARS WARRANTY | CE

DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	ON/OFF	24V	18 W	TD87500932
			35 W	TD87501054
			60 W	TD87501055
			100 W	TD87501056
			200 W	TD87501057



IP67 | CLASS II | 3 YEARS WARRANTY | CE

DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	ON/OFF	24V	36 W	8011-2437
			60 W	8011-2438
			100 W	8011-2439
			150 W	8011-2440

IP20 CLASS II 5 YEARS WARRANTY CE DALI 2

DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	DALI-2	24V	30 W	8011-2429
			60 W	8011-2430
			100 W	8011-2431
			150 W	8011-2432
			250 W	8011-2433



IP20 CLASS II 5 YEARS WARRANTY CE DALI 2

DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	DALI-2	24V	35 W	TD28001920
			60 W	TD28001921
			100 W	TD28001922
			150 W	TD28001923



IP20 CLASS II 2 YEARS WARRANTY CE

DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	TRIAC	24V	36 W	8011-2434
			75 W	8011-2435
			150 W	8011-2436



FONTES ALIMENTAÇÃO
POWER SUPPLY



IP20 | CLASS II | 5 YEARS WARRANTY | CE | CASAMBI

DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	BLUETOOTH (CASAMBI)	24V	35 W	TD28002677
			60 W	TD28002674
			100 W	TD28002675
			150 W	TD28002678



IP20 | CLASS II | 5 YEARS WARRANTY | CE | MATTER

DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	MATTER	24V	35 W	TD28004489
			60 W	TD28004490
			100 W	TD28004491
			150 W	TD28004492



IP20 | CLASS II | 5 YEARS WARRANTY | CE

DESCRIPTION	CONTROL	VOLTAGE	CHANNEL	POWER	ORDER CODE
Fonte Alimentação Power Supply	BLUETOOTH (TUYA)	24V	1	75 W	8011-2441
			2	100 W	8011-2442



IP20

Android: iOS:

DESCRIPTION	CONTROL	COMMISSIONING	MAXIMUM PUSH-BUTTON CONNECTED	ORDER CODE
sceneCOM S DALI-2	DALI-2	BLUETOOTH APP	4	28004922



IP20

DESCRIPTION	CURRENT	VOLTAGE	ORDER CODE
Fonte alimentação DALI-2 DALI-2 power supply	70mA	230VAC	8030-0873



IP20

DESCRIPTION	CONTROL	MAXIMUM PUSH-BUTTON CONNECTED	ORDER CODE
Módulo DALI-2 XC para botão de pressão DALI-2 XC module for Push-button	DALI-2	4	28002877



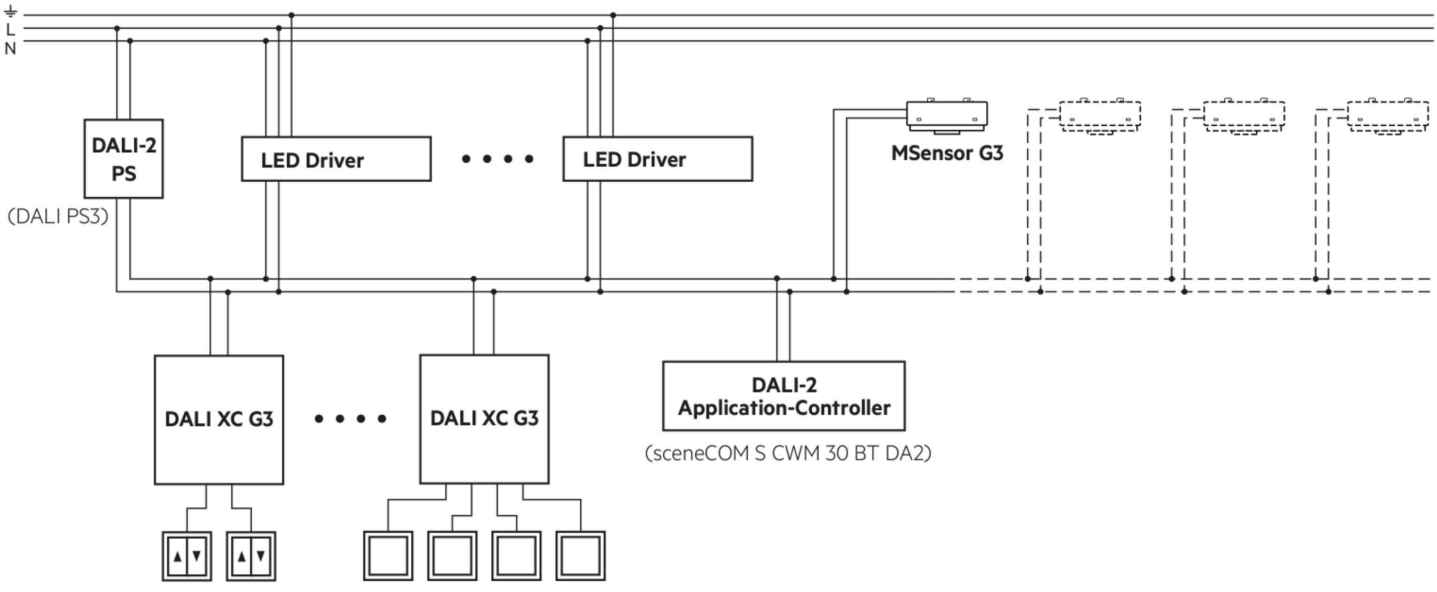

CONTROLADORES - CASAMBI
CONTROLLERS - CASAMBI



IP20 | 5 YEARS WARRANTY | CE | CASAMBI

DESCRIPTION	CONTROL	MAXIMUM NUMBER DRIVERS CONNECTED	VOLTAGE	ORDER CODE
Módulo ativo CASAMBI Active module CASAMBI	BLUETOOTH (CASAMBI)	1 50	230VAC	CBU-ASD-LR CBU-DA-1P



IP20 | 5 YEARS WARRANTY | CE | CASAMBI

DESCRIPTION	CONTROL	MAXIMUM PUSH-BUTTON CONNECTED	MAXIMUM NUMBER DRIVERS CONNECTED	VOLTAGE	ORDER CODE
Módulo Ativo Wireless basicDIM G2 TRIDONIC basicDIM Wireless Active module G2 TRIDONIC	BLUETOOTH (CASAMBI)	1	4	230VAC	28003540



IP20 | 5 YEARS WARRANTY | CE | CASAMBI

DESCRIPTION	CONTROL	MAXIMUM DALI SENSOR CONNECTED	ORDER CODE
Módulo passivo CASAMBI Passive module CASAMBI	BLUETOOTH (CASAMBI)	1	CBU-DCS



IP20 | 5 YEARS WARRANTY | CE | CASAMBI

DESCRIPTION	CONTROL	MAXIMUM PUSH-BUTTON CONNECTED	ORDER CODE
Módulo Passivo Wireless basicDIM G2 TRIDONIC basicDIM Wireless Passive module G2 TRIDONIC	BLUETOOTH (CASAMBI)	4	28003541



IP20 | 5 YEARS WARRANTY | CE | CASAMBI

DESCRIPTION	CONTROL	ORDER CODE
Bluetooth sensor TRIDONIC	BLUETOOTH (CASAMBI)	8030-2801
Caixa saliente para sensor bluetooth Surface housing for bluetooth sensor	—	8030-2802



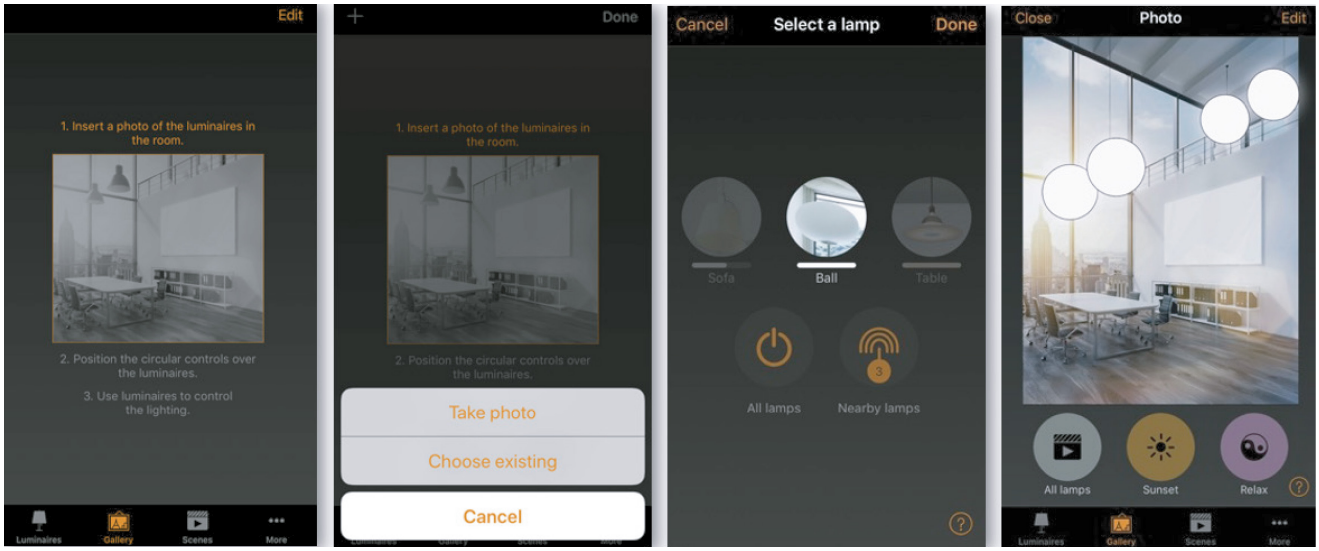

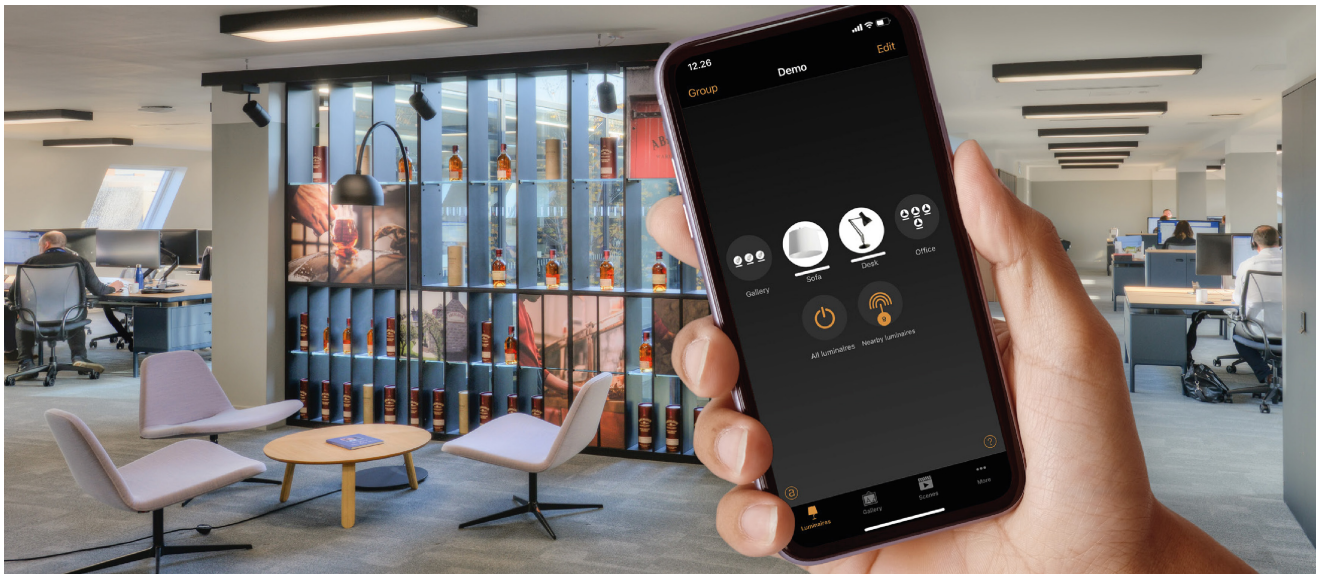

GET IT ON Google Play

Download on the App Store

CONTROLADORES - CASAMBI
CONTROLLERS - CASAMBI



IP20 | 5 YEARS WARRANTY | CE | CASAMBI

DESCRIPTION	CONTROL	VOLTAGE	CHANNEL	POWER	ORDER CODE
Módulo CASAMBI para RGBW + Tunable White CASAMBI module for RGBW + Tunable White	BLUETOOTH (CASAMBI)	24V	4	144W	CBU-PWM4

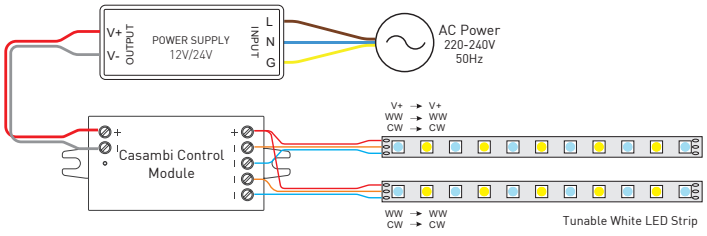



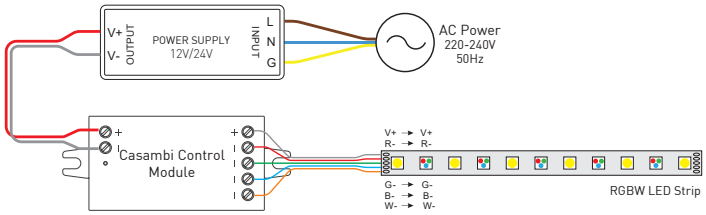





IP20 | 5 YEARS WARRANTY | CE | CASAMBI

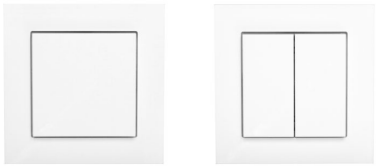

DESCRIPTION	CONTROL	ORDER CODE
Interruptor branco CASAMBI - 1 tecla CASAMBI White Switch - 1 way rocker	BLUETOOTH (CASAMBI)	1051W
Interruptor branco CASAMBI - 2 teclas CASAMBI White Switch - 2 way rocker		1052WN

IP20 | 5 YEARS WARRANTY | CE | CASAMBI



DESCRIPTION	CONTROL	ORDER CODE
Painel interface CASAMBI - preto CASAMBI user panel interface - black	BLUETOOTH (CASAMBI)	8030-2213
Painel interface CASAMBI - branco CASAMBI user panel interface - white		8030-2420

IP20

DESCRIPTION	CONTROL	VOLTAGE	CHANNEL	POWER	ORDER CODE
Controlador RGBW + Comando RF (A) RGBW controller + RF remote control (A)	RF	24V	4	480W	8012-0100
Controlador RGBW + Comando RF (B) RGBW controller + RF remote control (B)					8012-0101





IP20

DESCRIPTION	CONTROL	VOLTAGE	CHANNEL	POWER	ORDER CODE
Controlador TC + Comando RF CT controller + RF remote control	RF	24V	2	216W	8012-0102



IP20

DESCRIPTION	CONTROL	VOLTAGE	CHANNEL	POWER	ORDER CODE
Controlador Dimmer +Comando RF Dimmer controller + RF remote control	RF	24V	1	216W	8012-0103



IP20

DESCRIPTION	CONTROL	VOLTAGE	CHANNEL	POWER	ORDER CODE
Amplificador Amplifier	RF	24V	1	192W	8012-0104
			4	480W	8012-0105



CONTROLADORES - WI-FI
CONTROLLERS - WI-FI



IP20 | 5 YEARS WARRANTY | CE

DESCRIPTION	CONTROL	VOLTAGE	CHANNEL	POWER	ORDER CODE
Controlador Wi-Fi Wi-Fi controller	WI-FI / RF	24V	4	384W	8012-0106

GET IT ON Google Play

Download on the App Store



IP20 | 5 YEARS WARRANTY | CE

DESCRIPTION	CONTROL	VOLTAGE	CHANNEL	POWER	ORDER CODE
Controlador Wi-Fi/RF Wi-Fi/ RF controller	RF	24V	4	480W	8012-0107



IP20

DESCRIPTION	CONTROL	ORDER CODE
Comando - Cor única Remote Controller- Single color	RF	8012-0108
Comando - RGB Remote Controller- RGB	WI-FI / RF	8012-0109



IP20

DESCRIPTION	CONTROL	ORDER CODE
Painel Touch - Cor única Touch Panel- Single color	RF	8012-0110
Painel Touch - RGBW Touch Panel- RGBW		8012-0111



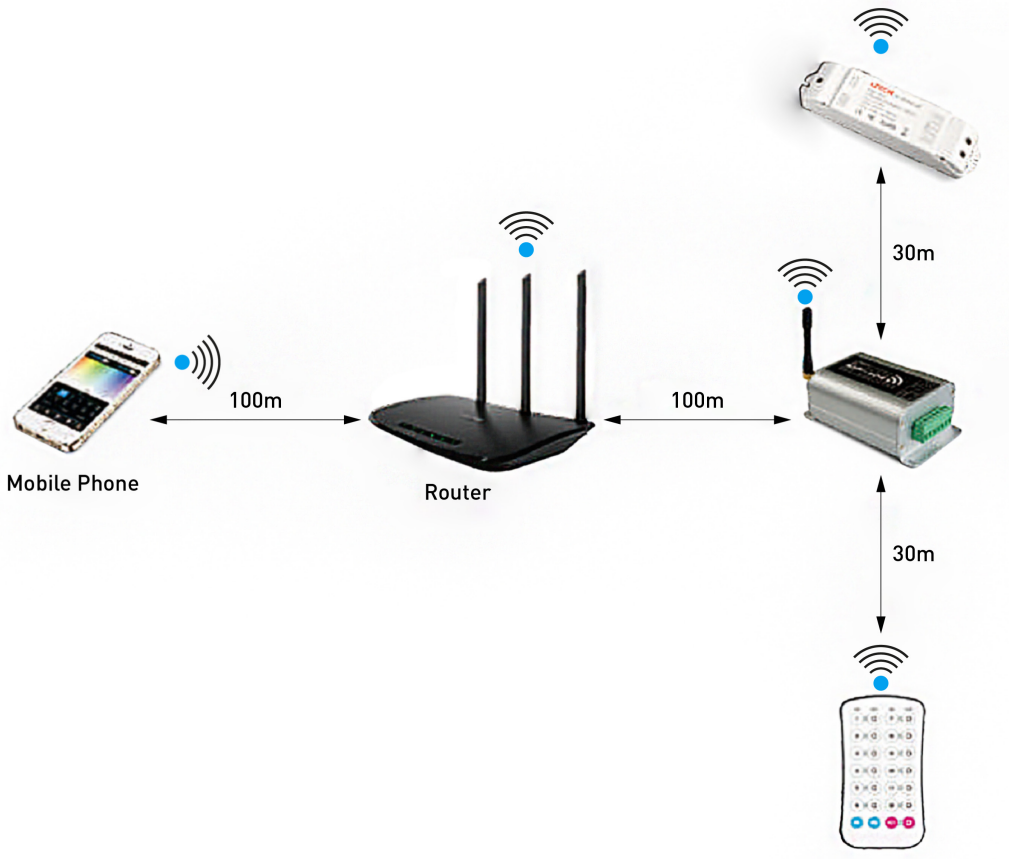

LUMINÁRIAS | LIGHTINGS





FOLLOW-ME EVO



RoHS | 1,5W | 230V | IK04 | LED | IP20 | CLASS II | CE | ISO 3864 EN 60598-2-22 | 24m

A FOLLOW ME EVO é uma luminária de indicação de saída de emergência com pictograma de leitura dupla face. Permite a instalação no teto de forma SALIENTE, ENCASTRADA, SUSPENSA ou aplicada na PAREDE. O corpo é em alumínio com acabamento termolacado branco e o painel retroiluminado é em acrílico transparente, onde é aplicado o pictograma que sinaliza a saída.

A FOLLOW-ME EVO permite, na mesma luminária, definir o modo de funcionamento "permanente" ou "não permanente", no local da instalação. De base está configurada para "não permanente", mas basta ligar uma linha de fase no terminal "SL" (Switched Line) para a tornar "permanente". Isto proporciona conveniência e economia, eliminando a necessidade de encomendar luminárias diferentes para cada modo de operação.

FOLLOW-ME EVO is an emergency exit luminaire with a double-sided pictogram. Allows installation as SURFACE, RECESSED, SUSPENDED, or WALL MOUNTED. The body is made of aluminum with a white thermo lacquered finish, and the backlit panel is made of clear acrylic, where the exit signaling pictogram is applied.

FOLLOW ME EVO offers the possibility, within the same luminaire, to define a "maintained" or "non-maintained" operating mode at the installation site. By default, it is configured as "non-maintained," but simply connecting a phase line to "SL" (Switched Line) terminal makes it "maintained". This provides convenience and savings, eliminating the need to order different luminaires for each operating mode.



PERMANENTE | MAINTAINED

Ligada permanentemente. | Continuously ON.
Potência: 1,5W (no funcionamento normal ou de emergência). | Power: 1,5W (in normal or emergency operation).



NÃO PERMANENTE | NON-MAINTAINED

Ligada apenas em caso de falha de energia. | ON only in case of a power failure.
Potência: 0,5W em standby e 1,5W em modo de emergência. | Power: 0,5W in standby mode and 1,5W in emergency mode.



GENERAL INFORMATION

RATED LUMINOUS FLUX	110 lm
INPUT VOLTAGE	220-240 VAC
FREQUENCY	50/60 Hz
REMOTE CONTROL VOLTAGE RANGE	5-20 VDC
BATTERY TYPE	Li-ion 3.6V 2500mAh
DISCHARGING TIME	3h
VISIBILITY	24m
CHARGING TIME	8h
OPERATING TEMPERATURE	0ºC ~ 40ºC
BATTERY LIFETIME	1500 cycles
DIMENSIONS	284x215x35 mm

MATERIALS

LUMINÁRIA | FIXTURE	Alumínio | Aluminium
SINALIZAÇÃO | SIGNALLING	Acrílico | Acrylic
PCB - CEM-1 RETARDANTE DA CHAMA | PCB - CEM-1 FLAME-RETARDANT	

PICTOGRAMS





ORDER CODES

APPLICATION	TYPE	POWER	ORDER CODE
# Versão básica | Basic Version*	Permanente ou Não Permanente | Maintained or Not Maintained	1.5W or 0.5W	612.XX.PI
A Suspensão | Suspended**			613.XX.PI
B Saliente | Surface			614.XX.PI
C Encastrado | Recessed			615.XX.PI
D Parede Bandeirola | Wall Flag			616.XX.PI
E Colocação na parede | Wall Mounted			617.XX.PI

* Kit de instalação não fornecido | No installation kit supplied
** Incluir o acessório para a aplicação no teto: saliente ou encastrado. | Please include the ceiling application: surface or recessed.

CONTROL TYPE	XX
Modo de descanso | Rest Mode	RM
Opção DALI | DALI option	DL

PICTOGRAM	PI
→	0011
←	0012
↓	0013
↙	0014
↗	0015
↖	0016
↕	0017

ACCESSORIES | SUSPENDED



A Saliente | Surface
50041020.TW
50041020.TB



A Encastrado | Recessed
50041021.TW
50041021.TB

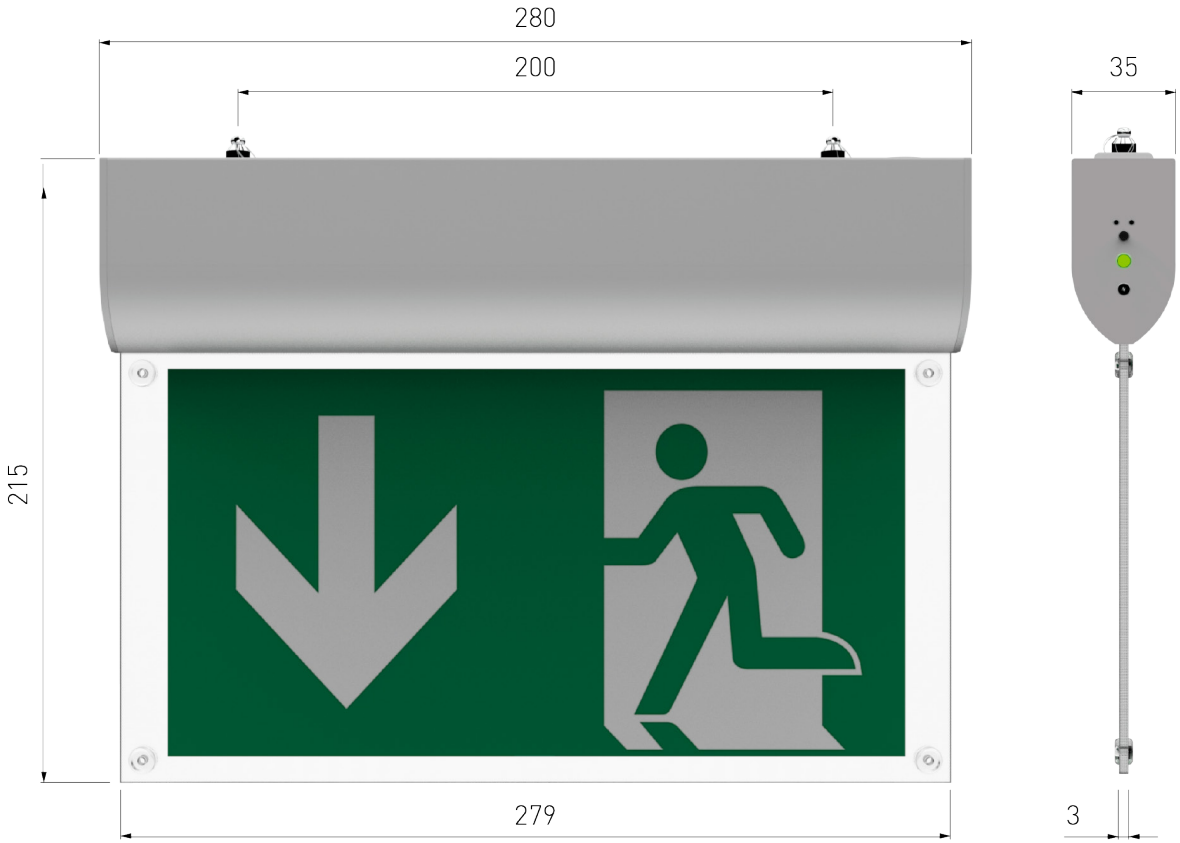

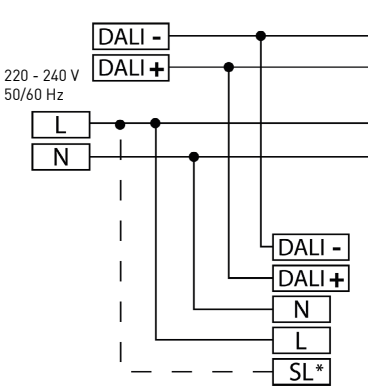

OPÇÃO DALI | DALI OPTION

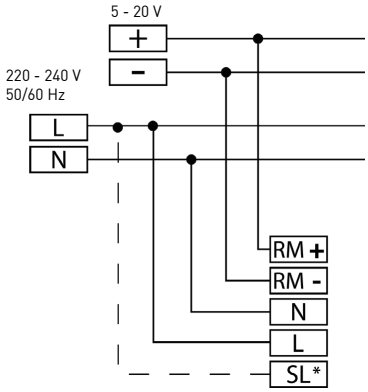

MODO DE DESCANSO | REST MODE

*Ligar uma linha de fase no terminal "SL" (Switched Line) para a tornar "Permanente" | *Connect a phase line to the "SL" (Switched Line) terminal to make it "Maintained".









SOFTIS

RoHS	>80 CRI	230V	IK09	3000/4000 CCT	IP66	CLASS I	ON OFF TYPE	CE	5 YEARS WARRANTY
3 STEPS MacAdam	50000h								

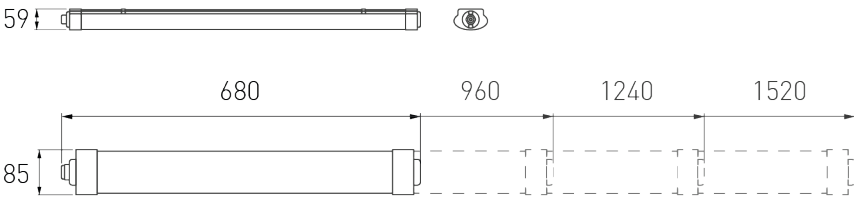

SURFACE



SUSPENDED

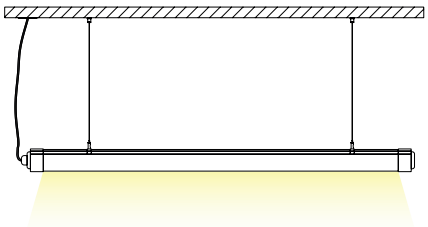

PT

A luminária SOFTIS apresenta uma elevada eficiência, até 211lm/W. Esta luminária é a solução ideal para iluminar áreas com grandes dimensões e propósitos muito diferentes, como estacionamentos, áreas técnicas, áreas industriais, hipermercados, linhas de montagem e pavilhões desportivos.

EN

The SOFTIS is a highly efficient luminaire with up to 211lm/W. This luminaire is the ideal solution for lighting large areas with very different purposes, such as parking lots, technical areas, industrial areas, hypermarkets, assembly lines and sports halls.



Select your preferred option

Selecione a sua opção preferida
Sélectionnez votre option préférée

CONTROL TYPE	XX
ON/OFF	NF
DALI PUSH DIM	DA

SOFTIS CRI >80

LENGHT	POWER	CCT	LED LUMENS	LUMINAIRE LM	LED EFFICACY	INPUT CABLE	INPUT + OUTPUT CABLE
680 mm	13,3 W	3000k	2698 lm	2293 lm	202 lm/W	760XX.06.830	761XX.06.830
		4000k	2818 lm	2395 lm	211 lm/W	760XX.06.840	761XX.06.840
960 mm	20 W	3000k	4047 lm	3440 lm	202 lm/W	760XX.09.830	761XX.09.830
		4000k	4227 lm	3593 lm	211 lm/W	760XX.09.840	761XX.09.840
1240 mm	26,7 W	3000k	5396 lm	4587 lm	202 lm/W	760XX.12.830	761XX.12.830
		4000k	5636 lm	4791 lm	211 lm/W	760XX.12.840	761XX.12.840
1520 mm	33,4 W	3000k	6745 lm	5733 lm	202 lm/W	760XX.15.830	761XX.15.830
		4000k	7045 lm	5988 lm	211 lm/W	760XX.15.840	761XX.15.840

KIT EMERGÊNCIA | EMERGENCY KIT



Kit de Emergência Tridonic 150W 50-200VDC 1H 4 células
Tridonic emergency kit 150W 50-200VDC 1H 4 cells
6080-006



Kit de Emergência Tridonic 150W 50-200VDC 3H 4 células
Tridonic emergency kit 150W 50-200VDC 1H 4 cells
6080-007

RoHS · IP20 · CLASS II · CE · 5 YEARS WARRANTY

KIT SUSPENSÃO | SUSPENSION KIT



80303017.SL	1,5m
80303018.SL	3m
80303019.SL	5m

ACABAMENTO | FINISHING	FI
Silver Coated	SL

ICONOGRAFIA BRILUMEN
BRILUMEN ICONOGRAPHY

TECHNICAL SPECIFICATIONS
ESPECIFICAÇÕES TÉCNICAS
SPÉCIFICATIONS TECHNIQUES

CORRIDOR FUNCTION

DALI PUSH DIM

DALI

ON.OFF

Cutting diameter
Diâmetro de corte / Diamètre de coupe

Color rendering index (CRI)
Índice de restituição cromática (CRI)
Indice de Reproduction Chromatique (CRI)

Beam angle
Ângulo de feixe / Angle de faisceau

Direction angle
Ângulo de oscilação / Angle d'oscillation

IP - Luminaire ingress protection rating
IP - Índice de estanqueidade e proteção da luminária
IP - Indice d'étanchéité et de protection

Unified Glare Rating .
Taxa de encandeamento / Taux d'éblouissement

Operating temperature
Temperatura de funcionamento
Température de fonctionnement

Technical drawing´s measures presented in mm.
Medidas dos desenhos técnicos apresentadas em mm.
Dimensions des dessins techniques en mm

PF - Power factor
PF - Fator de potência / PF - Facteur de puissance

Time of continuous use
Número de horas de uso contínuo
Nombre d'heures d'utilisation continue

Electrical classes I, II, III.
Classes de isolamento I, II, III / Classes d'isolation I, II, III

LED type
Tipo de LED / Type de LED

IK - Impact Protection Rating
IK - Índice de Proteção contra Impactos Mecânicos
IK - Indice de protection contre les chocs mécaniques

European standards
Normas Europeias / Normes européennes

5 Years of Warranty
5 Anos de garantia/ 5 Années de garantie

3 Years of Warranty
3 Anos de garantia/ 3 Années de garantie

2 Years of Warranty
2 Anos de garantia/ 2 Années de garantie

COLOUR FINISHES
CORES DE ACABAMENTO
COULEURS DE FINITION

BL — Black . Preto / Noir

TB — Textured Black . Preto texturado / Noir texturé

WH — White . Branco / Blanc

TW — Textured White Branco texturado / Blanc texturé

AL — Anodized Aluminium
Alumínio anodizado / Aluminium anodisé

BAL — Brushed Aluminium
Alumínio escovado / Aluminium brossé

BS — Brushed Steel
Aço escovado / Acier brossé

TS — Textured Silver
Prateado texturado / Argent texturé

COLOUR TEMPERATURE CCT
TEMPERATURAS DA COR DISPONÍVEIS CCT
TEMPÉRATURES DE COULEUR DISPONIBLES CCT

5000K | 5500K | 6000K | 6400K | 6500K

4000K | 4200K

2500K | 2700K | 3000K

Tunable White

RGBW

CE Marking
Marcação CE / Marquage CE

Restriction of certain hazardous substances
Restrição de certas substâncias perigosas normativa Europeia
Restriction de certaines substances dangereuses
Réglementations européennes

Recyclable. Do not put in trash
Reciclável. Não colocar no lixo comum
Recyclable. ne pas jeter à la poubelle

Choose LED, be environment friend
Escolha LED, proteja o meio ambiente
Choisissez la LED, protégez l'environnement

CONTACTOS BRILUMEN
BRILUMEN CONTACT

brilumen®
Lighting emotions!



GPS 41°15'31.6"N / 8°38'55.4"W

BRILUMEN
PRODUTOS ELÉCTRICOS, LDA
Rua de Oliveira e Sá, nº 200
4475-263 Maia

Tel. (+351) 220 920 550

info@brilumen.com

www.brilumen.com

Due to the constant technological evolution and to make available the most advanced solutions, Brilumen reserves the right to change data contained in this document without prior notice. The most up-to-date version of the products/features can be found on the website www.brilumen.com.

Devido à constante evolução tecnológica e com o objetivo de disponibilizar sempre as soluções mais avançadas, a Brilumen reserva-se no direito de alterar os dados constantes deste documento sem aviso prévio. A versão mais atualizada dos produtos/características poderá ser consultada no website www.brilumen.com.

En raison de l'évolution constante des technologies et afin de mettre à disposition les solutions les plus avancées, Brilumen se réserve le droit de modifier les données contenues dans le présent document sans préavis. La version la plus récente des produits/fonctionnalités est disponible sur le site internet www.brilumen.com.

PRODUCT CATALOG
CATÁLOGO DE PRODUTOS
WWW.BRILUMEN.COM

COMPETE 2030
PORTUGAL 2030
Cofinanciado pela União Europeia