

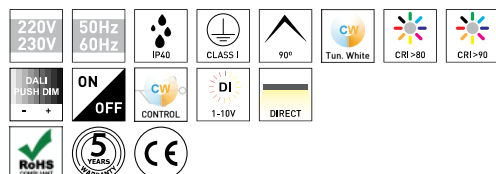
DESCRIPTION

A space only reveals its true charm with the right lighting. Being aware of this reality, Brilumen presents a LED profiles collection with a 5 Year Warranty, that will help you to create the desired environment. With different wattages, dimensions and mounting types, these profiles can be applied in numerous locations, such as stores, cinemas, museums, galleries, hotels, restaurants, meeting rooms, offices, lounges, etc. With Oris 50mm it's possible to mount light lines up to 5,05 meters without joining, with or without trims, add emergency kits with 1 or 3 hours of autonomy and choose white, black or aluminium as finishing colour. The LED profiles can also be configured in ON-OFF, Dimming 0-10VDC or with the advanced DALI PUSH DIM. Brilumen has also available the IES and LDT files for DIALux projects, providing technical assistance during the lighting project.

MOUNTING TYPE	Trimless
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured White
CONTROL	1-10V, DALI, ON/OFF, Tunable White


TECHNICAL DRAWING
LED FEATURES

LUMINOUS EFFICIENCY	UP TO 179 lm/W
CRI	CRI→80, CRI→90, Tunable White CRI→80
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1


ICONOGRAFIA

ORIS 50MM TRIM. OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→80

DIMENSION	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	UGR	LED LUMENS	LUMINAIRE LM	CODE
850	24	AL, TW	3000K, 4000K	1V, DA, NF		4040	2926	172XX.0809.CT.FI
1130	32	AL, TW	3000K, 4000K	1V, DA, NF		5400	3994	172XX.1109.CT.FI
1410	40	AL, TW	3000K, 4000K	1V, DA, NF		6740	4977	172XX.1409.CT.FI
1690	48	AL, TW	3000K, 4000K	1V, DA, NF		8100	5939	172XX.1609.CT.FI
1970	56	AL, TW	3000K, 4000K	1V, DA, NF		9440	6920	172XX.1909.CT.FI
2250	64	AL, TW	3000K, 4000K	1V, DA, NF		10800	7988	172XX.2209.CT.FI
2530	72	AL, TW	3000K, 4000K	1V, DA, NF		12140	8971	172XX.2509.CT.FI
2810	80	AL, TW	3000K, 4000K	1V, DA, NF		13480	9954	172XX.2809.CT.FI
3090	88	AL, TW	3000K, 4000K	1V, DA, NF		14840	10916	172XX.3009.CT.FI
3370	96	AL, TW	3000K, 4000K	1V, DA, NF		16200	11878	172XX.3309.CT.FI
3930	112	AL, TW	3000K, 4000K	1V, DA, NF		18880	13948	172XX.3909.CT.FI
4490	128	AL, TW	3000K, 4000K	1V, DA, NF		21580	15893	172XX.4409.CT.FI
5050	144	AL, TW	3000K, 4000K	1V, DA, NF		24300	17817	172XX.5009.CT.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
1-10V	1V	3000K	30	Anodized aluminium	AL
DALI	DA	4000K	40	Textured White	TW
ON/OFF	NF				


ORIS 50MM TRIM. OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI>90

DIMENSION	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	UGR	LED LUMENS	LUMINAIRE LM	CODE
850	23,4	AL, TW	3000K, 4000K	1V, DA, NF		3790	2745	176XX.0809.CT.FI
1130	31,2	AL, TW	3000K, 4000K	1V, DA, NF		5040	3728	176XX.1109.CT.FI
1410	39	AL, TW	3000K, 4000K	1V, DA, NF		6310	4660	176XX.1409.CT.FI
1690	46,8	AL, TW	3000K, 4000K	1V, DA, NF		7560	5543	176XX.1609.CT.FI
1970	54,6	AL, TW	3000K, 4000K	1V, DA, NF		8830	6473	176XX.1909.CT.FI
2250	62,4	AL, TW	3000K, 4000K	1V, DA, NF		9640	7456	176XX.2209.CT.FI
2530	70,2	AL, TW	3000K, 4000K	1V, DA, NF		11350	8388	176XX.2509.CT.FI
2810	78	AL, TW	3000K, 4000K	1V, DA, NF		12620	9320	176XX.2809.CT.FI
3090	85,8	AL, TW	3000K, 4000K	1V, DA, NF		13870	9747	176XX.3009.CT.FI
3370	93,6	AL, TW	3000K, 4000K	1V, DA, NF		15120	11086	176XX.3309.CT.FI
3930	109,2	AL, TW	3000K, 4000K	1V, DA, NF		17660	13048	176XX.3909.CT.FI
4490	124,8	AL, TW	3000K, 4000K	1V, DA, NF		20180	14863	176XX.4409.CT.FI
5050	140,4	AL, TW	3000K, 4000K	1V, DA, NF		22680	16629	176XX.5009.CT.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
1-10V	1V	3000K	30	Anodized aluminium	AL
DALI	DA	4000K	40	Textured White	TW
ON/OFF	NF				


ORIS 50MM TRIM. OPAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - Tunable White CRI>80

DIMENSION	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	UGR	LED LUMENS	LUMINAIRE LM	CODE
850	19,8	AL	2700K - 6500K	TW		3525	2553	172XX.0809.CT.FI
1130	26,4	AL	2700K - 6500K	TW		4700	3476	172XX.1109.CT.FI
1410	33	AL	2700K - 6500K	TW		5875	4339	172XX.1409.CT.FI
1690	39,6	AL	2700K - 6500K	TW		7050	5169	172XX.1609.CT.FI
1970	46,2	AL	2700K - 6500K	TW		8225	6029	172XX.1909.CT.FI
2250	52,8	AL	2700K - 6500K	TW		9400	6952	172XX.2209.CT.FI
2530	59,4	AL	2700K - 6500K	TW		10575	7815	172XX.2509.CT.FI
2810	66	AL	2700K - 6500K	TW		11750	8678	172XX.2809.CT.FI
3090	72,6	AL	2700K - 6500K	TW		12925	9508	172XX.3009.CT.FI
3370	79,2	AL	2700K - 6500K	TW		14100	10338	172XX.3309.CT.FI
3930	92,4	AL	2700K - 6500K	TW		16450	12154	172XX.3909.CT.FI
4490	105,6	AL	2700K - 6500K	TW		18800	13847	172XX.4409.CT.FI
5050	118,8	AL	2700K - 6500K	TW		21150	15507	172XX.5009.CT.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX	COLOR TEMP.	CT	FINISHING	FI
Tunable White	TW	2700K - 6500K	82765	Anodized aluminium	AL

ACCESSORIES



Oris Trimless
Oris Trimless 8030-1400.2000