
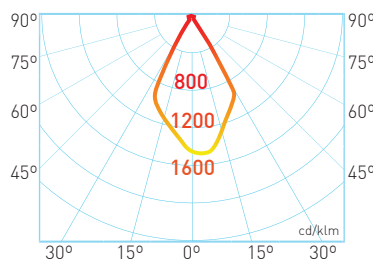
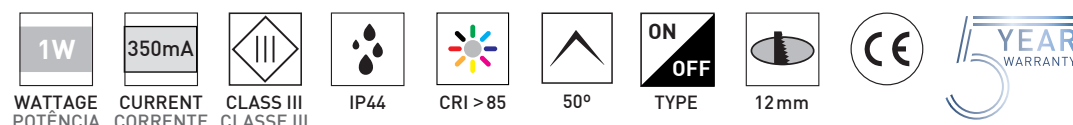


BRILUMEN DATA SHEET



1m	Ø1,05m	32,8 lx
2m	Ø2,11m	8,2 lx
3m	Ø3,16m	3,65 lx
4m	Ø4,22m	2,05 lx
5m	Ø5,27m	1,31 lx
6m	Ø6,33m	0,91 lx

ORDER OPTIONS OPÇÕES DE ENCOMENDA

PRODUCT CODE	POWER	BEAM ANGLE	CRI	CCT	LED LUMENS	LUMINAIRE LUMENS
340.85.50.30.TW	1 W	50°	> 85	3000K	120 lm	40 lm
340.85.50.40.TW	1 W	50°	> 85	4000K	125 lm	45 lm

ACCESSORIES OPTIONS OPÇÕES DE ACESSÓRIOS

PRODUCT CODE	DESCRIPTION
8015-0222	Driver for TinkerBell 1-3 pieces, 350mA Driver para TinkerBell 1-3 unidades, 350mA
8015-0224	Driver for TinkerBell 3-5 pieces, 350mA Driver para TinkerBell 3-5 unidades, 350mA
8030-0004	Distributor with 6 outputs Distribuidor com 6 saídas
8030-0008	Distributor shunt Shunt para distribuidor
4080-1030	Waterproof box 81x83x55mm: 1 cable gland input of 4,8mm and 5 outputs Caixa estanque 81x83x55mm: 1 buçim de entrada de 4,8mm e 5 saídas
4080-1031	Output cable gland for waterproof box Buçim de saída p/ caixa estanque
4080-1033	Cover for waterproof box Tampa p/ caixa estanque

