

DESCRIPTION

The HERON from Brilumen is a spotlight with a great aesthetic beauty equipped with a high performance LED. Recently, two new solutions for the use of this lighting fixture have been added: Surface and recessed versions. It is available in textured white and black finishing. The high quality textured black finishing and the option of golden ring present the HERON as an irrefutable choice for your project.


MOUNTING TYPE	Surface
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured Black and Gold, Textured White
CONTROL	CASAMBI, DALI, ON/OFF




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 142 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

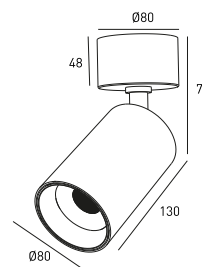

ICONOGRAPHY

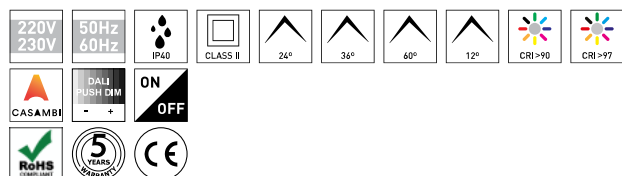

HERON SPOTLIGHT SURFACE
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

POWER	FINISHING	CONTROL TYPE	BEAMANGLE	UGR	LED LUMENS	LUMINAIRE LM	LEDEFFICACY	COLOR TEMP.	CODE
24,1	TB, TBG, TW	CS, DA, NF	12, 24, 36, 60		3215	2733	134	2700K	454XX.BA.927.FI
24,1	TB, TBG, TW	CS, DA, NF	12, 24, 36, 60		3350	2848	140	3000K	454XX.BA.930.FI
24,1	TB, TBG, TW	CS, DA, NF	12, 24, 36, 60		3402	2892	142	4000K	454XX.BA.940.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAMANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI	DA	Textured Black and Gold	TBG	24°	24
ON/OFF	NF	Textured White	TW	36°	36
				60°	60

HERON SPOTLIGHT SURFACE
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

POWER	FINISHING	CONTROL TYPE	BEAMANGLE	UGR	LED LUMENS	LUMINAIRE LM	LEDEFFICACY	COLOR TEMP.	CODE
24,6	TB, TBG, TW	CS, DA, NF	12, 24, 36, 60		2855	2427	117	2700K	456XX.BA.9727.FI
24,6	TB, TBG, TW	CS, DA, NF	12, 24, 36, 60		2969	2524	121	3000K	456XX.BA.9730.FI
24,6	TB, TBG, TW	CS, DA, NF	12, 24, 36, 60		3044	2588	125	4000K	456XX.BA.9740.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAMANGLE	BA
CASAMBI	CS	Textured Black	TB	12°	12
DALI	DA	Textured Black and Gold	TBG	24°	24
ON/OFF	NF	Textured White	TW	36°	36
				60°	60