

brilumen[®]

Oris Slim Pro

Wall Light



ORIS SLIM PRO

WALL LIGHT



EN

The luminaire Oris SlimPro Wall is a complement to the Oris SlimPro range.

The reduced dimensions of only 26 mm in width make this luminaire slim and distinctive and a good choice for wall application in refined spaces, where lighting is discreet, but efficient and with a high CRI.

PT

A luminária Oris SlimPro Wall surge como complemento da gama ORIS SlimPro, para aplicação na parede.

As dimensões reduzidas de apenas 26 mm de largura tornam esta luminária em alumínio esguia e distinta e uma boa escolha para aplicação mural em espaços requintados, onde a iluminação seja discreta, mas eficiente, e com elevado CRI.

FR

L'applique murale Oris SlimPro est un complément à la gamme ORIS SlimPro.

Ses dimensions de seulement 26mm de large, distinguent ce luminaire comme étant ultra fin et en fait le choix idéal pour les espaces raffinés, où l'éclairage doit être discret, mais efficace et posséder un CRI élevé.

GENERAL INFO

Wall light
Class I
IP40



DIFFUSER TYPE

Opal / Prismatic / Low Glare

LED PCB


3000K / 4000K
CRI>90
Lifetime 50.000h Tp 55°C
3 Steps MacAdam

DIMENSIONS (mm)

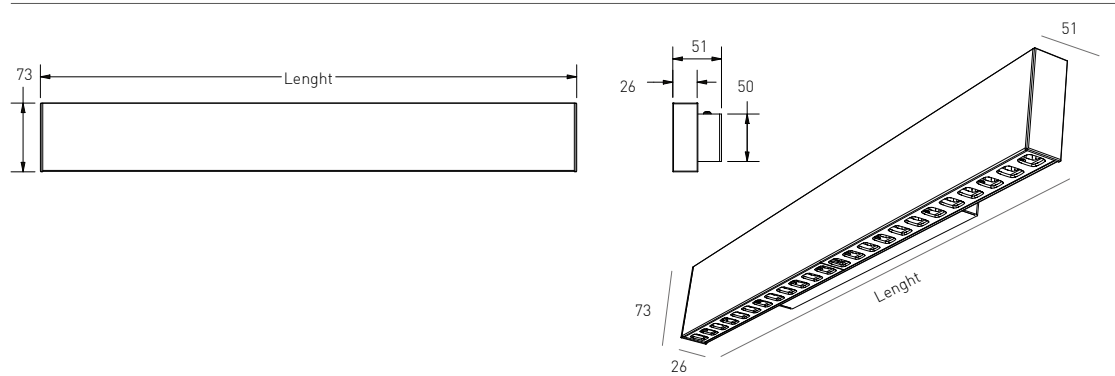

ORIS Slim Pro - Wall
OPAL / PRISMATIC Diffuser (O9/ P8) - CRI>90
Product Table / Tabela de produtos / Tableau des produits

LENGTH	POWER	LED LUMENS	LUMINAIRE LM	EFFICACY	ORDER CODE
580 mm	10,2 W	1576 lm	1064 lm	154 lm/W	295XX.05BA.9CT.FI
850 mm	15,3 W	2363 lm	1597 lm	154 lm/W	295XX.08BA.9CT.FI
1130 mm	20,4 W	3151 lm	2129 lm	154 lm/W	295XX.11BA.9CT.FI



Note


Full photometrics available online.
Fotometrias completas disponíveis online.
Photométries complètes disponibles en ligne.

*Lumen details for 4000K OPAL / *Detalhes de lumen para 4000K OPAL / *Détails de lumen pour 4000K OPALE

Select your preferred option


Selecione a sua opção preferida
Sélectionnez votre option préférée

CONTROL TYPE	XX	BEAM ANGLE	BA	COR. COL. TEMP	CT	FINISHING	FI
ON/OFF	NF	Opal 90°	O9	3000K	30	<input type="checkbox"/> Textured White	TW
DALI PUSH DIM	DA	Prismatic 80°	P8	4000K	40	<input type="checkbox"/> Textured Black	TB
						<input type="checkbox"/> Anodized Aluminium	AL



ORIS Slim Pro - Wall - LOW GLARE Diffuser (U6) - CRI>90
Product Table / Tabela de produtos / Tableau des produits

LENGTH	POWER	LED LUMENS	LUMINAIRE LM	EFFICACY	ORDER CODE
580 mm	7,6 W	1097 lm	967 lm	145 lm/W	296XX.05U6.9CT.FI
850 mm	11,4 W	1645 lm	1448 lm	145 lm/W	296XX.08U6.9CT.FI
1130 mm	15,2 W	2194 lm	1931 lm	145 lm/W	296XX.11U6.9CT.FI



Note


Full photometrics available online.
Fotometrias completas disponíveis online.
Photométries complètes disponibles en ligne.

*Lumen details for 4000K / *Detalhes de lumen para 4000K / *Détails de lumen pour 4000K

Select your preferred option


Selecione a sua opção preferida
Sélectionnez votre option préférée

CONTROL TYPE	XX	COR. COL. TEMP	CT	FINISHING	FI
ON/OFF	NF	3000K	30	<input type="checkbox"/> Textured White	TW
DALI PUSH DIM	DA	4000K	40	<input type="checkbox"/> Textured Black	TB
				<input type="checkbox"/> Anodized Aluminium	AL



ORIS Slim Pro - Wall
OPAL + OPAL INDIRECT Diffuser - CRI>90
Product Table / Tabela de produtos / Tableau des produits

LENGTH	POWER	LED LUMENS	LUMINAIRE LM	EFFICACY	ORDER CODE
580 mm	20,4 W	3151 lm	2128 lm	154 lm/W	297XX.0509.9CT.FI
850 mm	30,7 W	4727 lm	3194 lm	154 lm/W	297XX.0809.9CT.FI
1130 mm	40,9 W	6302 lm	4259 lm	154 lm/W	297XX.1109.9CT.FI



Note


Full photometrics available online.
Fotometrias completas disponíveis online.
Photométries complètes disponibles en ligne.

*Lumen details for 4000K OPAL / *Detalhes de lumen para 4000K OPAL / *Détails de lumen pour 4000K OPALE

Select your preferred option

Selecione a sua opção preferida
Sélectionnez votre option préférée

CONTROL TYPE	XX	COR. COL. TEMP	CT	FINISHING	FI
ON/OFF	NF	3000K	30	<input type="checkbox"/> Textured White	TW
DALI PUSH DIM	DA	4000K	40	<input type="checkbox"/> Textured Black	TB
				<input type="checkbox"/> Anodized Aluminium	AL



BRILUMEN
Rua de Oliveira e Sá, nº200
ZI, Maia, Setor 1
4475-263 Maia
PORTUGAL

V.1 2021
Oris Slim Pro Wall
PRODUCT CATALOG
CATÁLOGO DE PRODUCTOS
CATALOGUE DE PRODUITS
WWW.BRILUMEN.COM