



Ultimate Lighting Solution

IRIS

TUBULAR LED LIGHT

brilumen®




TABLE OF CONTENTS

INTRODUCING IRIS	4
360° BEAM ANGLE	6
New IRIS S 360°: Wall & Ceiling	8
IRIS V 360°: Vertical	12
IRIS H 360°: Horizontal	15
IRIS V 360°: Vertical - Track 48V	16
IRIS H 360°: Horizontal - Track 48V	19
IRIS V 360°: Vertical - Track 230V	20
IRIS H 360°: Horizontal - Track 230V	23
IRIS W 360°: IP65 - Waterproof (Vertical)	26
180° BEAM ANGLE	
IRIS W 180°: IP65 - Waterproof (Ceiling)	29
IRIS W 180°: IP65 - Waterproof (Wall)	30
CEILING APPLICATION	34
TECHNICAL INFORMATION	37
IRIS S 360°	38
IRIS V+ H 360°	39
IRIS V+ H 360°: Track 48V	40
IRIS V+ H 360°: Track 230V	41
IRIS W 360°: IP65	42
IRIS W 180°: IP65	43

INTRODUCING

IRIS


A solution that combines elegance and functionality. Available in a wide range of lengths, IRIS casts a perfect linear light, ensuring uniform and harmonious lighting in any room. Its tubular construction features an opal polycarbonate tube paired with aluminum end caps.

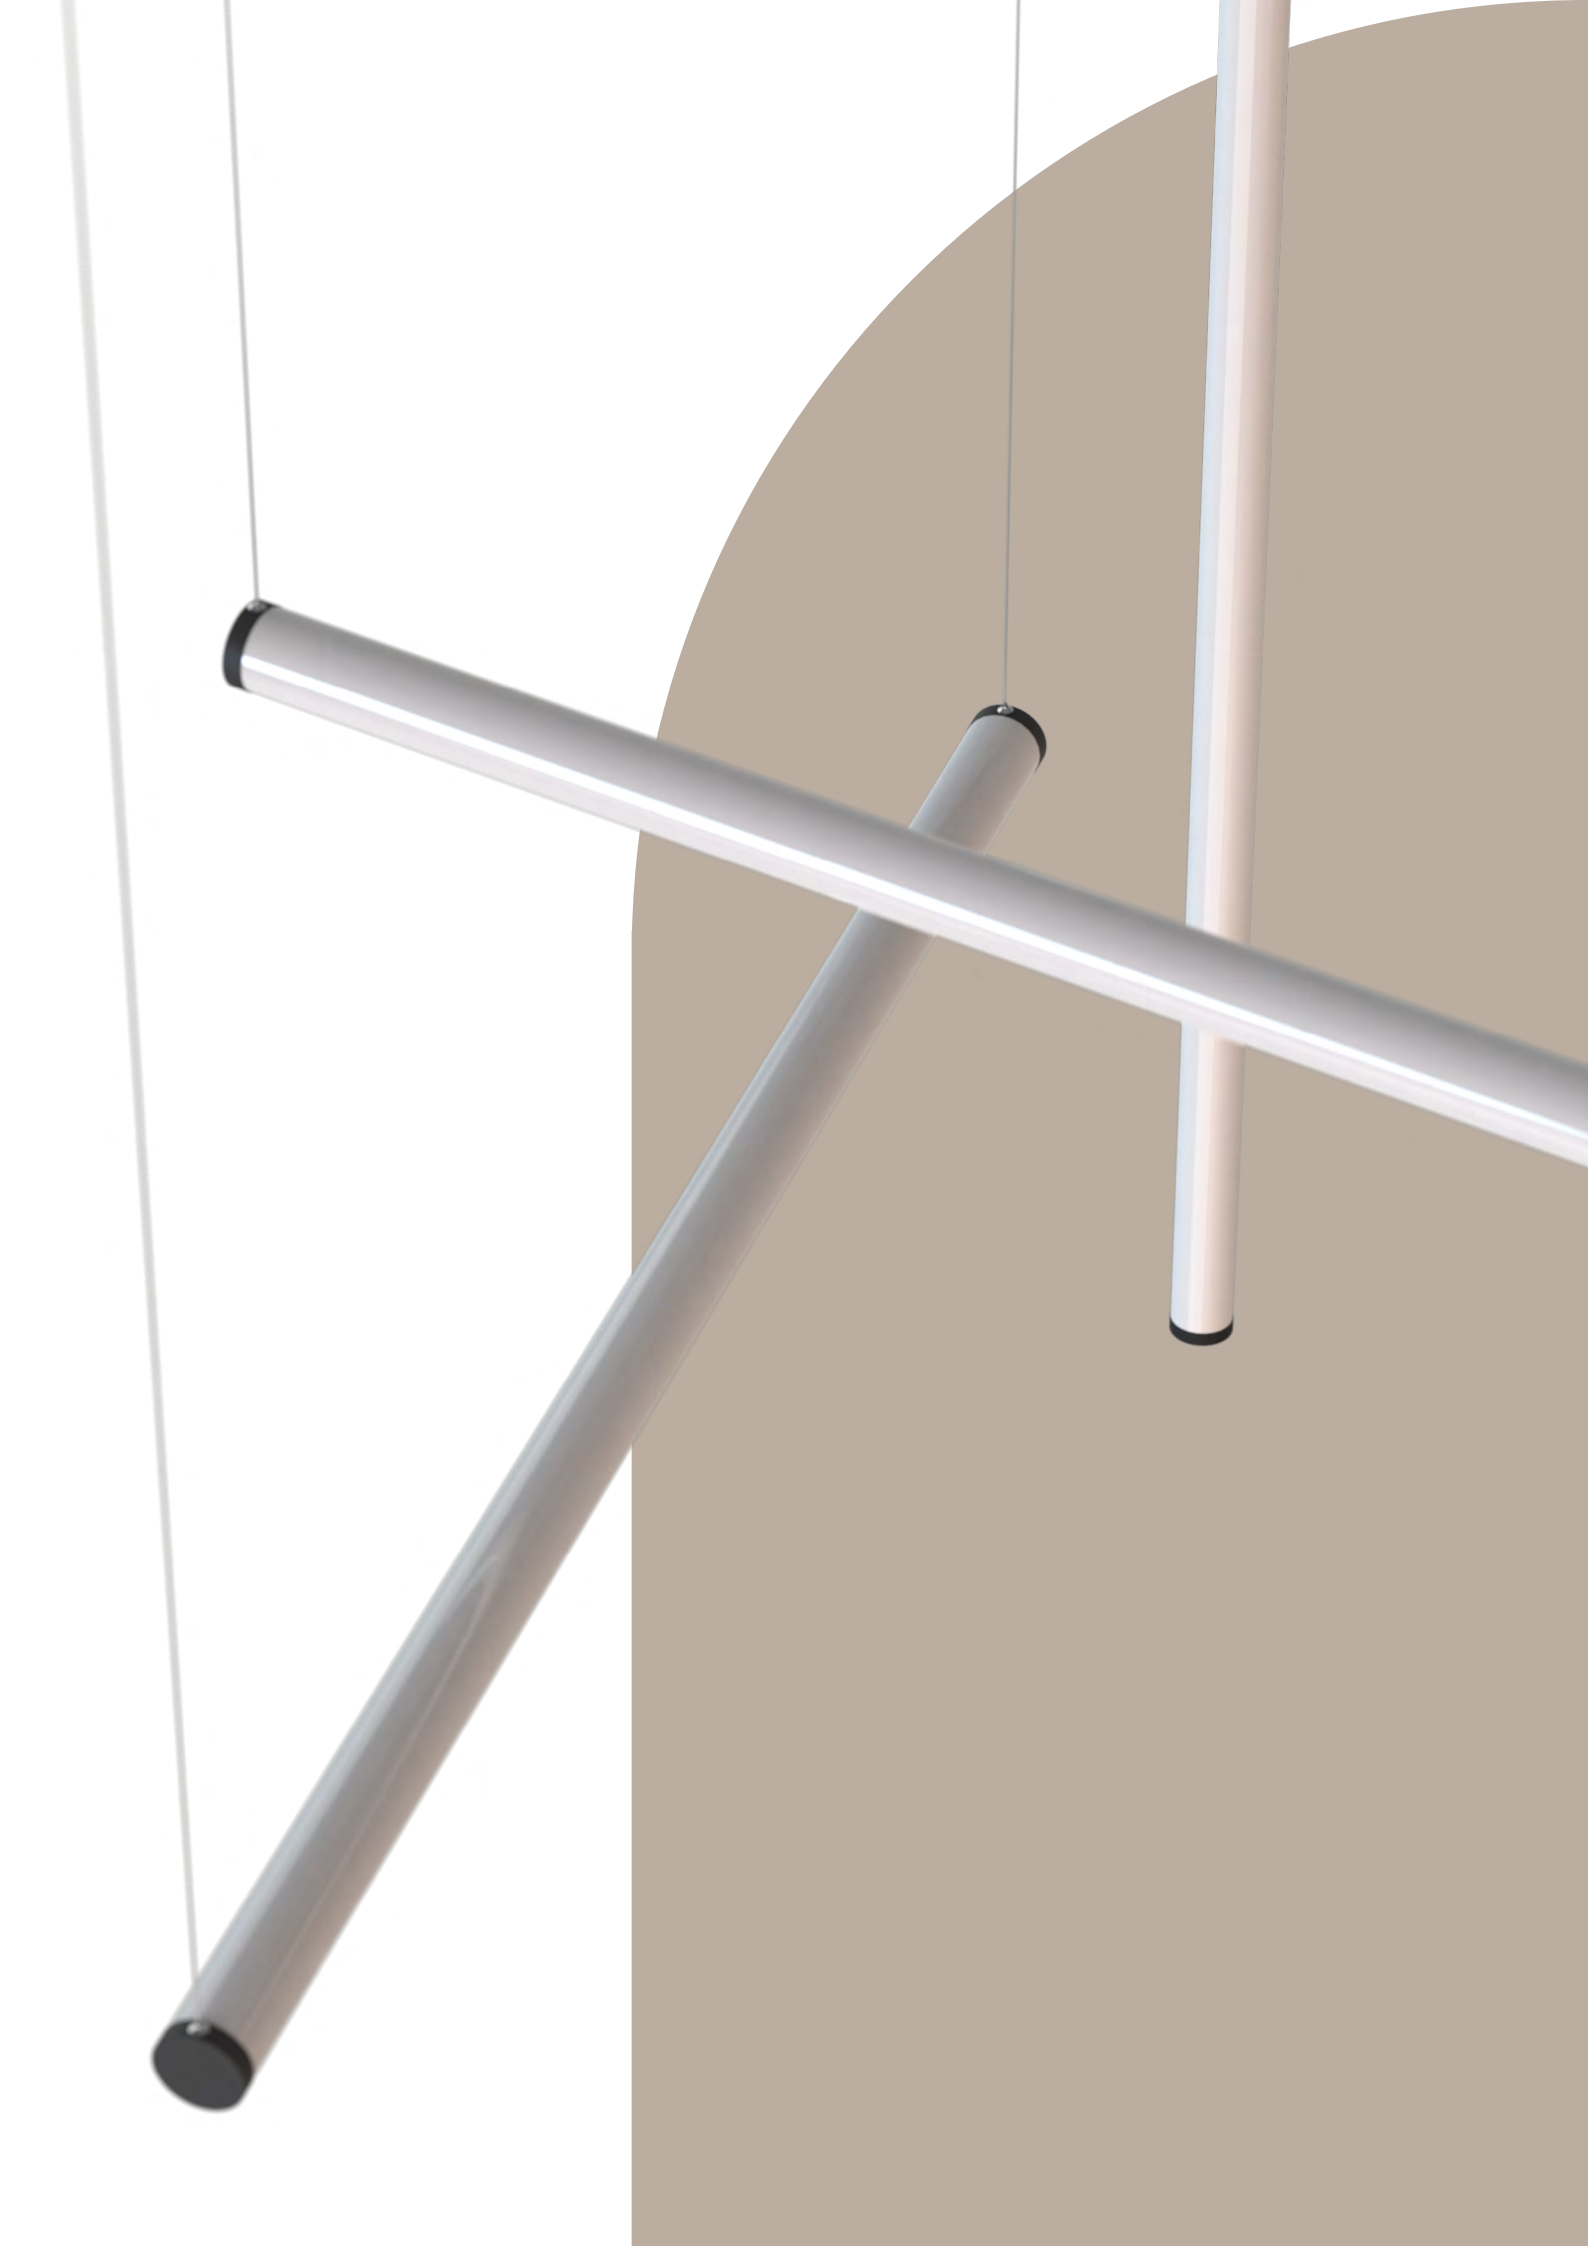


LIGHTING ELEGANCE

IN EVERY ANGLE

Experience full-circle illumination with the IRIS Tubular 360° lighting fixture. Its innovative design ensures a seamless 360° beam angle, casting light in every direction for complete coverage and ambiance. Illuminate your space with unparalleled uniformity and harmony, thanks to IRIS' unique 360° light emission feature.

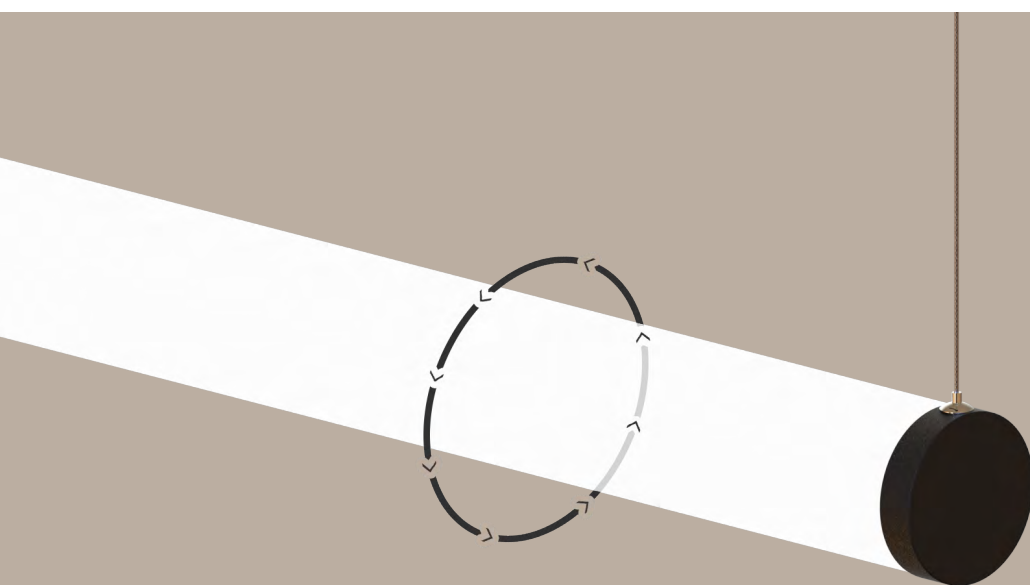

360°
BEAM ANGLE

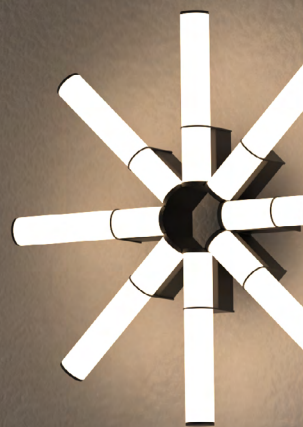

NEW

IRIS S 360°

WALL | CEILING



FINISHING



Textured Black



Textured White

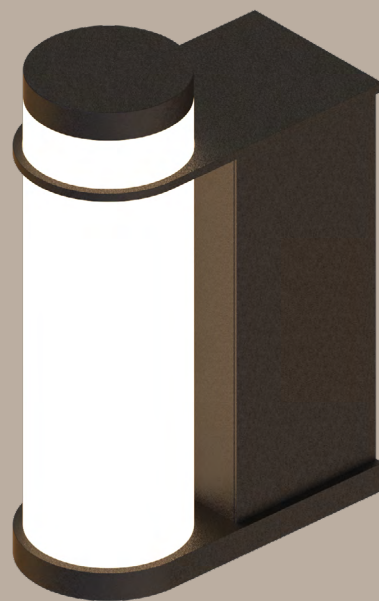

GENERAL INFO

Stand Alone tubular light
Surface
Class II
IP40

DIFFUSER TYPE

Opal polycarbonate tube

LED PCB

3000K / 4000K
CRI>90
Lifetime 50.000h Tp 55°C
3 Steps MacAdam



VOLTAGE



CLASS II



IP40



ANGLE

360°



CRI>90



3000-4000

CCT





NEW IRIS S 360°

ONE DESIGN, ENDLESS POSSIBILITIES



IRIS V 360°

VERTICAL

FINISHING

-  Textured Black
-  Textured White

GENERAL INFO

Stand Alone tubular light
Suspended
Class II
IP40

DIFFUSER TYPE

Opal polycarbonate tube

LED PCB

3000K / 4000K
CRI>90
Lifetime 50.000h Tp 55°C
3 Steps MacAdam



VOLTAGE

CLASS II

IP40

360°

CRI>90

CCT

100 mm








IRIS H 360°

HORIZONTAL

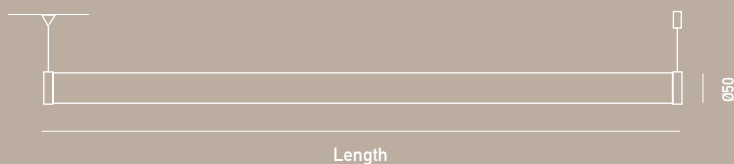

FINISHING

Textured Black



Textured White



GENERAL INFO

Stand Alone tubular light
Suspended
Class II
IP40

DIFFUSER TYPE

Opal polycarbonate tube

LED PCB

3000K / 4000K
CRI>90
Lifetime 50.000h Tp 55°C
3 Steps MacAdam



100 mm



CCT



CRI>90



360°



IP40



CLASS II



VOLTAGE

IRIS V 360°

VERTICAL - TRACK 48V

FINISHING

-  Textured Black
-  Textured White

GENERAL INFO

Stand Alone tubular light
Suspended
Class III
IP40

DIFFUSER TYPE

Opal polycarbonate tube

LED PCB

3000K / 4000K
CRI>90
Lifetime 50.000h Tp 55°C
3 Steps MacAdam



VOLTAGE

CLASS III

IP40

360°

CRI>90


CCT





IRIS H 360°

HORIZONTAL - TRACK 48V

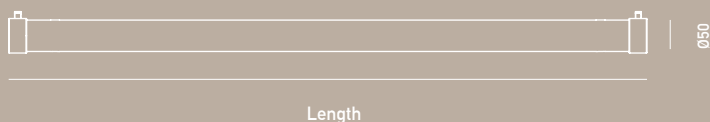

FINISHING

Textured Black

Textured White

GENERAL INFO

Stand Alone tubular light
Surface
Class III
IP40

DIFFUSER TYPE

Opal polycarbonate tube

LED PCB

3000K / 4000K
CRI>90
Lifetime 50.000h Tp 55°C
3 Steps MacAdam



IRIS V 360°

VERTICAL - TRACK 230V

FINISHING

-  Textured Black
-  Textured White

GENERAL INFO


Stand Alone tubular light
Suspended
Class II
IP40

DIFFUSER TYPE

Opal polycarbonate tube

LED PCB

3000K / 4000K
CRI>90
Lifetime 50.000h Tp 55°C
3 Steps MacAdam

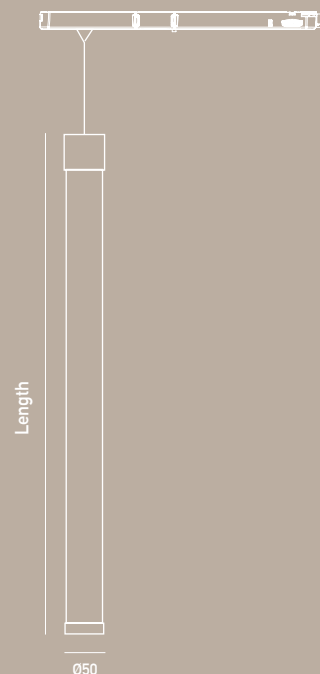

VOLTAGE

CLASS II

IP40

360°

CRI>90

CCT








IRIS H 360°

HORIZONTAL - TRACK 230V

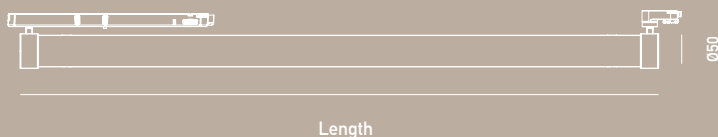

FINISHING

Textured Black



Textured White



GENERAL INFO

Stand Alone tubular light
Surface
Class II
IP40

DIFFUSER TYPE

Opal polycarbonate tube

LED PCB

3000K / 4000K
CRI>90
Lifetime 50.000h Tp 55°C
3 Steps MacAdam



CCT



CRI>90



360°



IP40



CLASS II



VOLTAGE





IRIS W 360°

IP65 - WATERPROOF

FINISHING

 Aluminium

GENERAL INFO


Stand Alone tubular light
Suspended
Class I
IP65

DIFFUSER TYPE

Opal polycarbonate tube

LED PCB

3000K / 4000K
CRI>90
Lifetime 50.000h Tp 55°C
3 Steps MacAdam

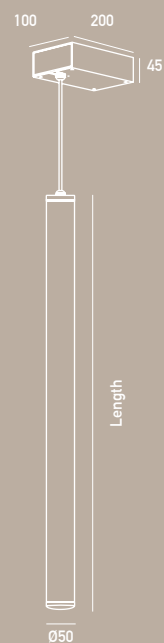

VOLTAGE



CLASS I



IP65



ANGLE

360°



CRI>90



3000-4000

CCT








IRIS W 180°

IP65 - WATERPROOF

FINISHING

Aluminium 

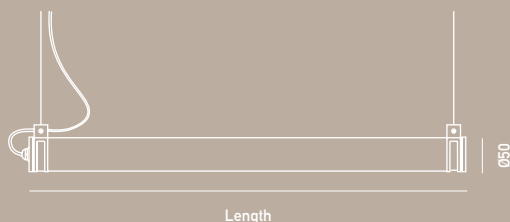

GENERAL INFO

Stand Alone tubular light
Suspended
Class I
IP65

DIFFUSER TYPE

Opal polycarbonate tube

LED PCB

3000K / 4000K
CRI>80 / CRI>90
Lifetime 50.000h Tp 55°C
3 Steps MacAdam



IRIS W 180°

IP65 - WATERPROOF

FINISHING

 Aluminium

GENERAL INFO

Stand Alone tubular light
Surface
Class I
IP65

DIFFUSER TYPE

Opal polycarbonate tube

LED PCB

3000K / 4000K
CRI>80 / CRI>90
Lifetime 50.000h Tp 55°C
3 Steps MacAdam



VOLTAGE



CLASS I



IP65



180°




CRI>90



CRI>80



CCT

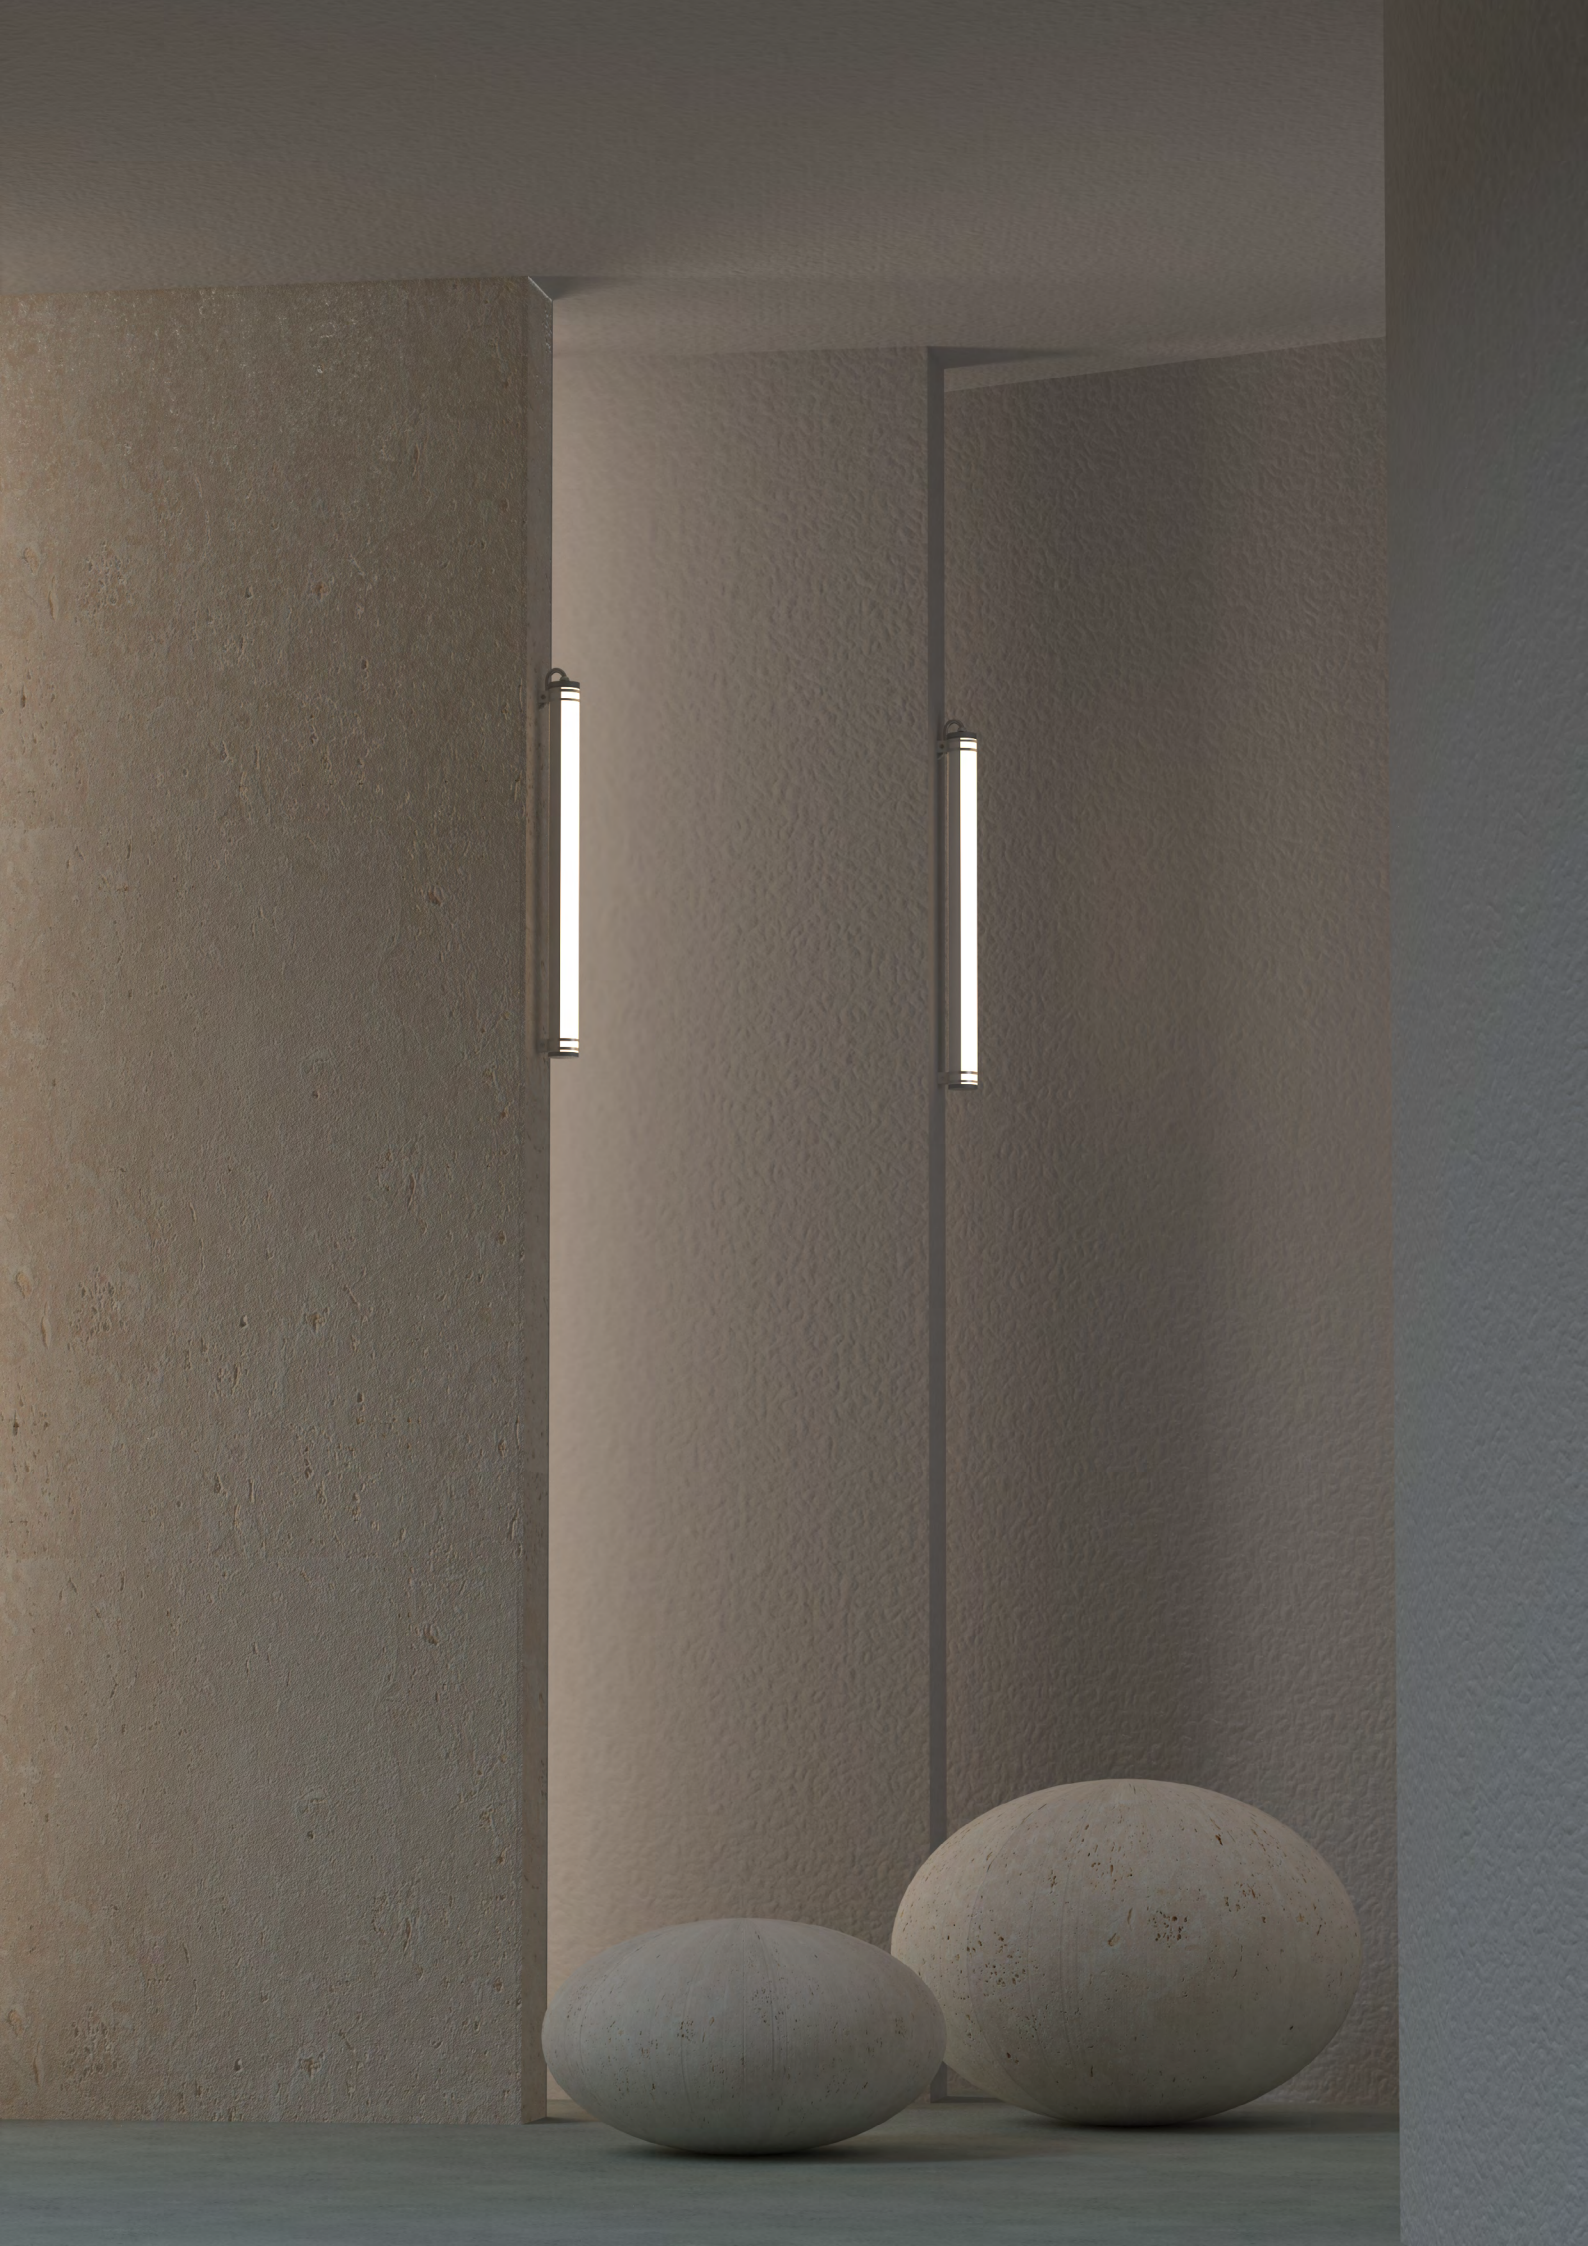





15

B

CEILING

APPLICATION

IRIS offers flexible mounting options, allowing it to be integrated into different settings. Besides surface and recessed applications, it can be placed into a magnetic setup or a 3-circuits universal track, for customizable lighting solutions tailored to your needs.

IRIS 360°



OVAL SURFACE




ROUND SURFACE



ROUND RECESSED




TRACK 48V

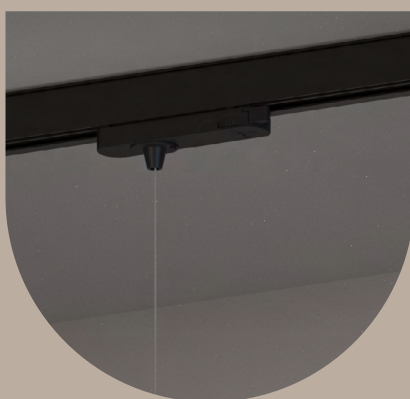

TRACK 230V



WATERPROOF

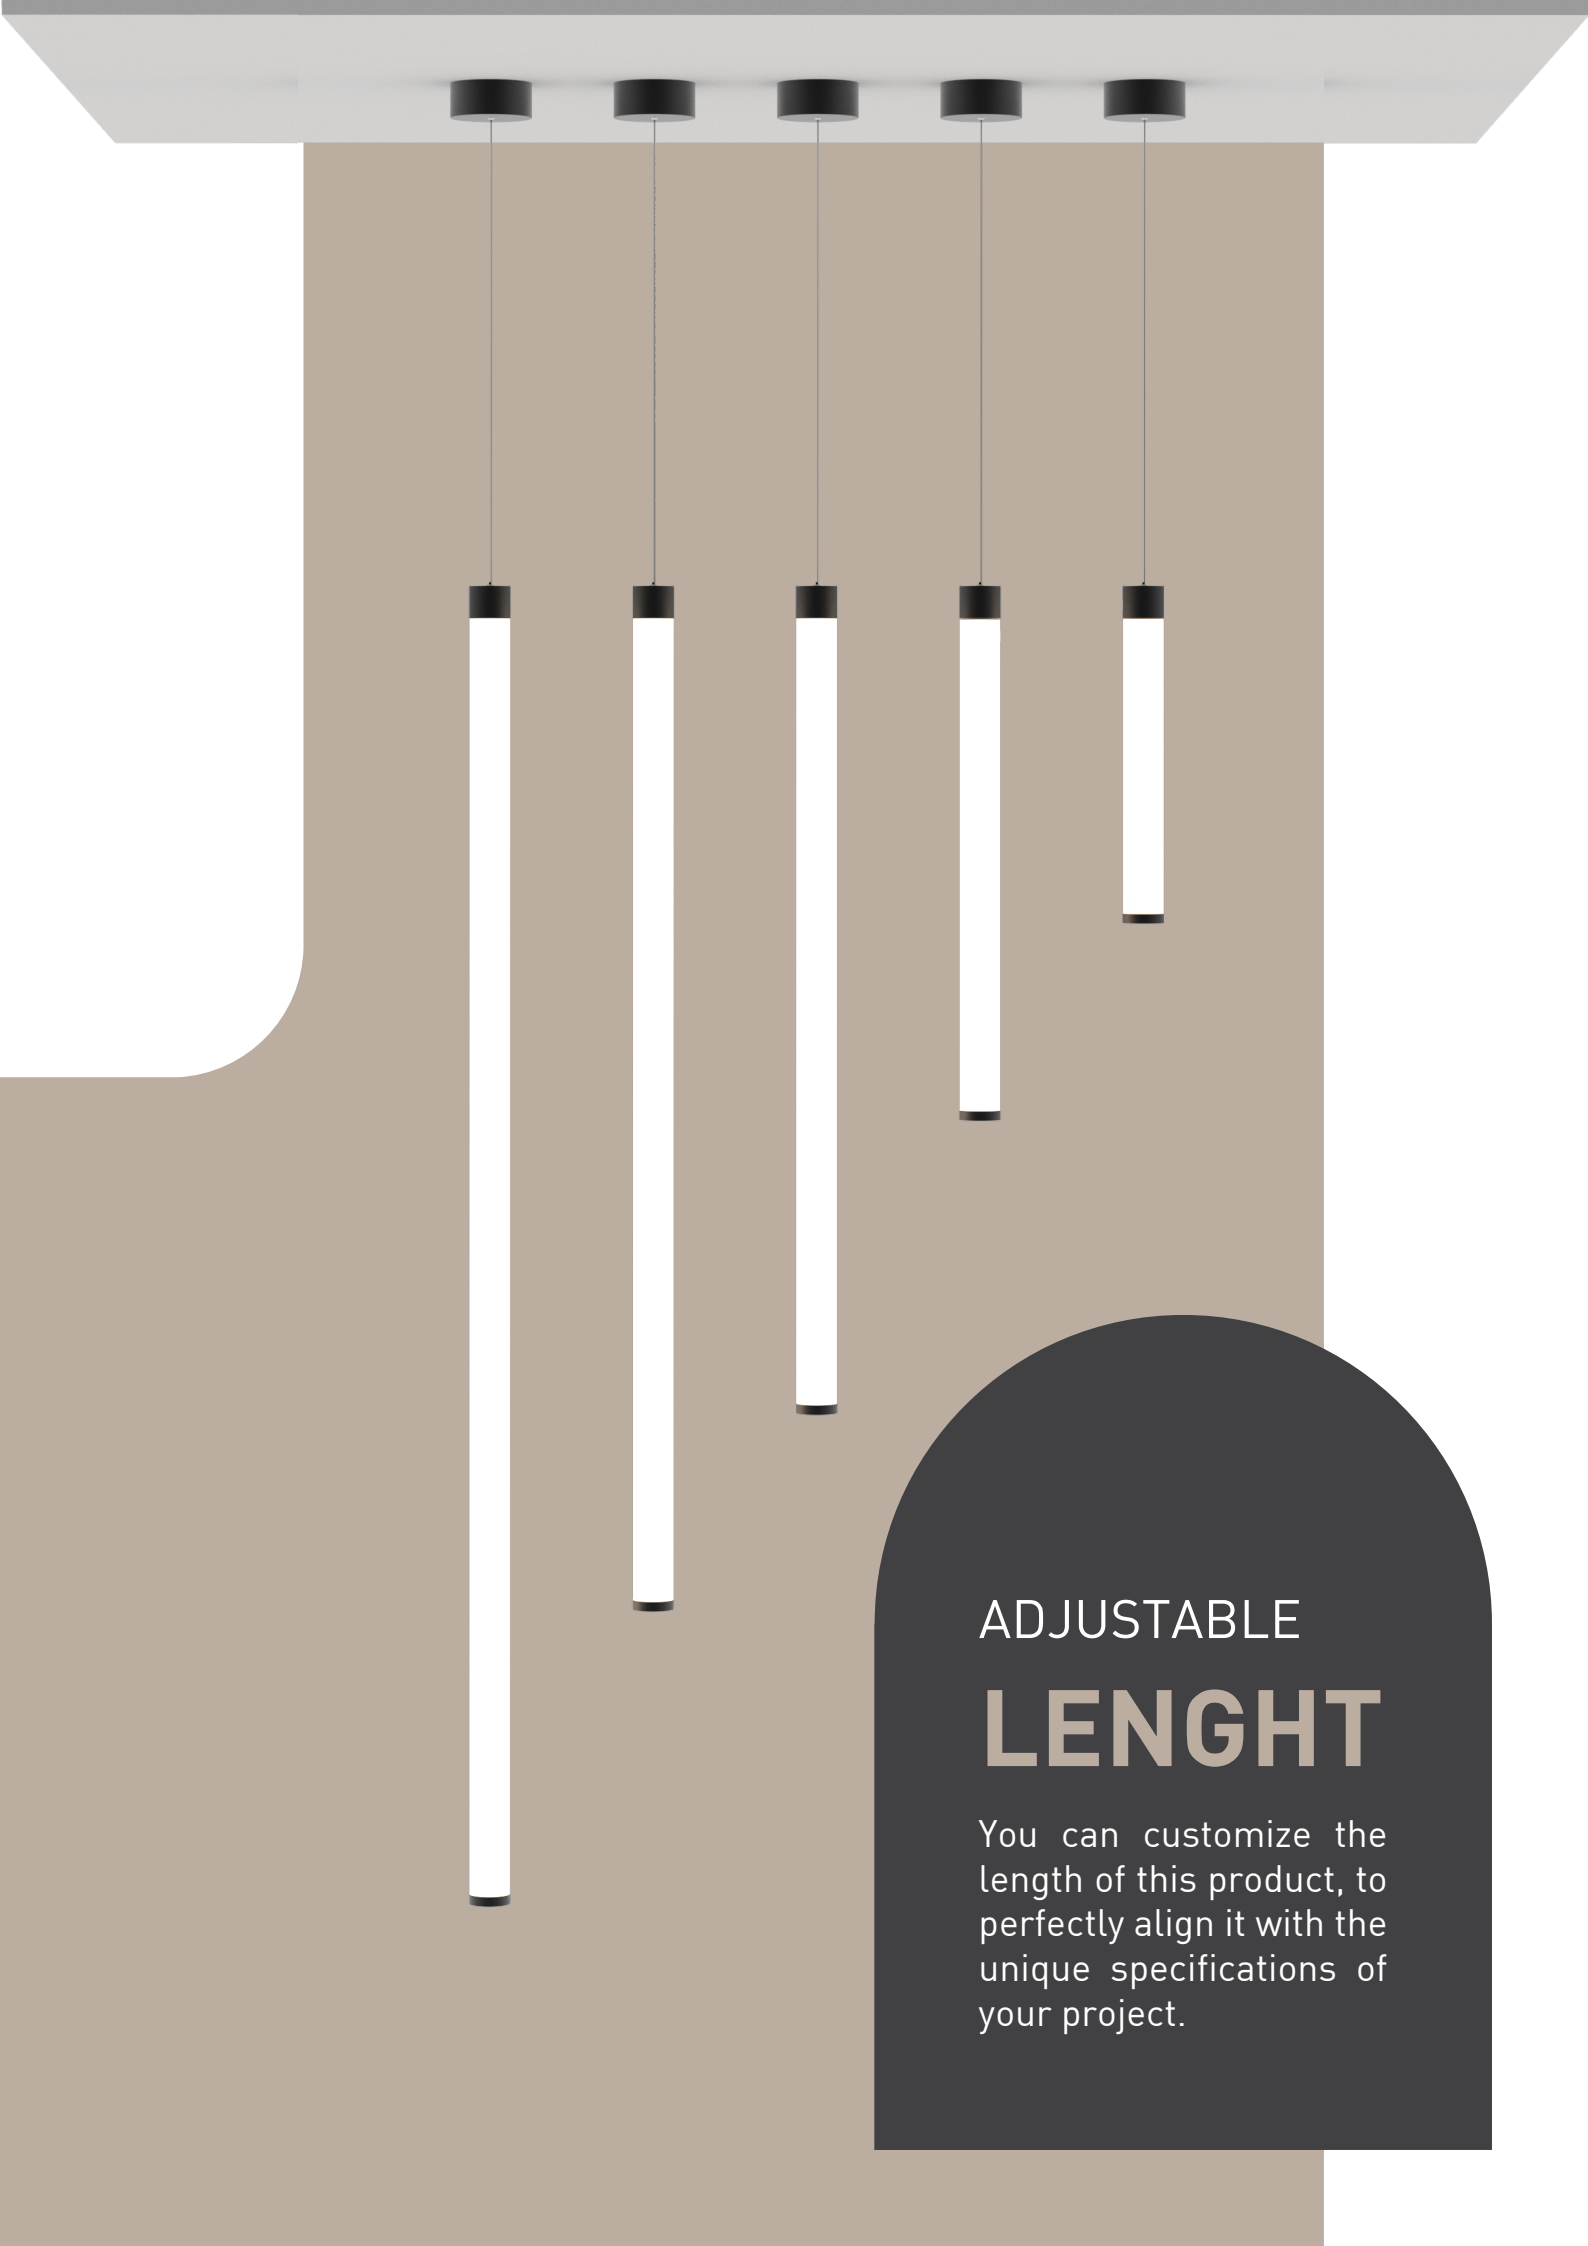

ADJUSTABLE
LENGHT

You can customize the length of this product, to perfectly align it with the unique specifications of your project.



TECHNICAL

INFORMATION




NEW DESIGN



IRIS S 360°

VERTICAL & HORIZONTAL

LENGTH	POWER	CCT	LED LUMENS	LUMINAIRE LM	EFFICACY	MODEL
175 mm	3,1 W	3000K	490 lm	404 lm	158 lm/W	159XX.01.930.FI
		4000K	519 lm	428 lm	167 lm/W	159XX.01.940.FI
320 mm	7,8 W	3000K	1225 lm	1011 lm	158 lm/W	159XX.03.930.FI
		4000K	1297 lm	1070 lm	167 lm/W	159XX.03.940.FI
620 mm	15,6 W	3000K	2449 lm	2021 lm	158 lm/W	159XX.06.930.FI
		4000K	2593 lm	2140 lm	167 lm/W	159XX.06.940.FI
920 mm	21,9 W	3000K	3428 lm	2828 lm	158 lm/W	159XX.09.930.FI
		4000K	3630 lm	2995 lm	167 lm/W	159XX.09.940.FI
1215 mm	28,1 W	3000K	4408 lm	3637 lm	158 lm/W	159XX.12.930.FI
		4000K	4667 lm	3850 lm	167 lm/W	159XX.12.940.FI

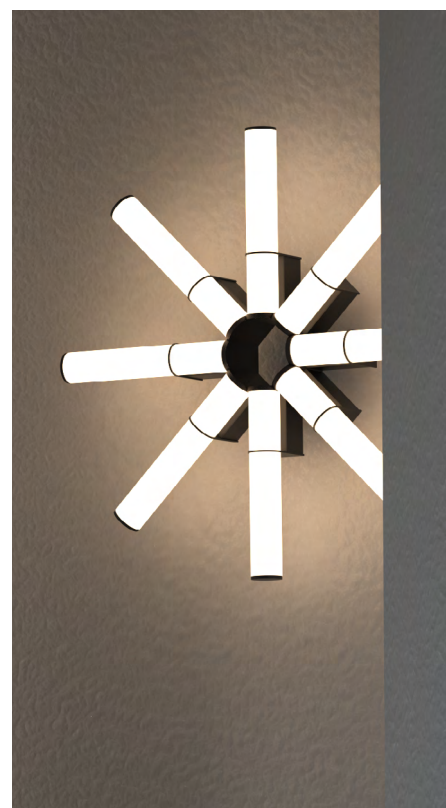

IRIS 1200MM 28,1W 4000K



CONTROL TYPE	XX
ON/OFF	NF
DALI PUSH DIM	DA
CASAMBI	CS

FINISHING	FI
 Textured Black	TB
 Textured White	TW

IRIS 360°

VERTICAL & HORIZONTAL



VERTICAL LENGTH	HORIZONTAL LENGTH	POWER	CCT	LED LUMENS	LUMINAIRE LM	EFFICACY	VERTICAL MODEL	HORIZONTAL MODEL
340 mm	326 mm	7,8 W	3000K	1225 lm	1011 lm	158 lm/W	163V.03.930.FI	163H.03.930.FI
			4000K	1297 lm	1070 lm	167 lm/W	163V.03.940.FI	163H.03.940.FI
640 mm	626 mm	15,6 W	3000K	2449 lm	2021 lm	158 lm/W	163V.06.930.FI	163H.06.930.FI
			4000K	2593 lm	2140 lm	167 lm/W	163V.06.940.FI	163H.06.940.FI
940 mm	926 mm	21,9 W	3000K	3428 lm	2828 lm	158 lm/W	163V.09.930.FI	163H.09.930.FI
			4000K	3630 lm	2995 lm	167 lm/W	163V.09.940.FI	163H.09.940.FI
1240 mm	1226 mm	28,1 W	3000K	4408 lm	3637 lm	158 lm/W	163V.12.930.FI	163H.12.930.FI
			4000K	4667 lm	3850 lm	167 lm/W	163V.12.940.FI	163H.12.940.FI
1540 mm	1526 mm	37,5 W	3000K	5877 lm	4849 lm	158 lm/W	163V.15.930.FI	163H.15.930.FI
			4000K	6222 lm	5133 lm	167 lm/W	163V.15.940.FI	163H.15.940.FI

CONNECTION KIT & ACCESSORIES

VERTICAL



LENGTH	ROUND	OVAL	RECESSED
340 mm	270NF.03.FI	271XX.03.FI	272XX.03.FI
640 mm	270NF.06.FI	271XX.06.FI	272XX.06.FI
940 mm	270NF.09.FI	271XX.09.FI	272XX.09.FI
1240 mm	270NF.12.FI	271XX.12.FI	272XX.12.FI
1540 mm	N/A	271XX.15.FI	272XX.15.FI



ACCESSORY	CABLE	ON/OFF
Power Cable	1 m	2080-042
	1,5 m	80303040
	3 m	80303041
	5 m	80303042



LENGTH	ROUND	OVAL	RECESSED
326 mm	275NF.03.FI	276XX.03.FI	277XX.03.FI
626 mm	275NF.06.FI	276XX.06.FI	277XX.06.FI
926 mm	275NF.09.FI	276XX.09.FI	277XX.09.FI
1226 mm	275NF.12.FI	276XX.12.FI	277XX.12.FI
1526 mm	N/A	276XX.15.FI	277XX.15.FI





ACCESSORY	CABLE	ON/OFF
Power Cable	1 m	2080-042
	1,5 m	80303040
	3 m	80303041
	5 m	80303042



ACCESSORY	CABLE	ORDER CODE
Suspension Kit	1 m	80303046
	1,5 m	80303043
	3 m	80303044
	5 m	80303045

IRIS 1500MM 37,5W 4000K



CONTROL TYPE	XX
ON/OFF	NF
DALI PUSH DIM	DA
CASAMBI	CS

FINISHING	FI
	Textured Black TB
	Textured White TW

IRIS 360°

TRACK 48V - VERTICAL & HORIZONTAL

VERTICAL LENGTH	HORIZONTAL LENGTH	POWER	CCT	LED LUMENS	LUMINAIRE LM	EFFICACY	VERTICAL MODEL	HORIZONTAL MODEL
340 mm	326 mm	7,8 W	3000K	1225 lm	1011 lm	158 lm/W	163V.03.930.FI	163H.03.930.FI
			4000K	1297 lm	1070 lm	167 lm/W	163V.03.940.FI	163H.03.940.FI
640 mm	626 mm	15,6 W	3000K	2449 lm	2021 lm	158 lm/W	163V.06.930.FI	163H.06.930.FI
			4000K	2593 lm	2140 lm	167 lm/W	163V.06.940.FI	163H.06.940.FI

CONNECTION KIT & ACCESSORIES

VERTICAL



CONTROL TYPE	LENGTH	ORDER CODE
NF, DL, CS	340 mm	274XX.03.FI
	640 mm	274XX.06.FI





ACCESSORY	CABLE	ON/OFF
Power Cable	1,5 m	80303001
	3 m	80303002
	5 m	80303003

HORIZONTAL



CONTROL TYPE	LENGTH	ORDER CODE
NF, DL, CS	326 mm	279XX.03.FI
	626 mm	279XX.06.FI

IRIS 600MM 15,6W 4000K



CONTROL TYPE	XX
ON/OFF	NF
DALI PUSH DIM	DA
CASAMBI	CS

FINISHING	FI
 Textured Black	TB
 Textured White	TW

IRIS 360°

TRACK 230V - VERTICAL & HORIZONTAL

VERTICAL LENGTH	HORIZONTAL LENGTH	POWER	CCT	LED LUMENS	LUMINAIRE LM	EFFICACY	VERTICAL MODEL	HORIZONTAL MODEL
640 mm	626 mm	15,6 W	3000K	2449 lm	2021 lm	158 lm/W	163V.06.930.FI	163H.06.930.FI
			4000K	2593 lm	2140 lm	167 lm/W	163V.06.940.FI	163H.06.940.FI
940 mm	926 mm	21,9 W	3000K	3428 lm	2828 lm	158 lm/W	163V.09.930.FI	163H.09.930.FI
			4000K	3630 lm	2995 lm	167 lm/W	163V.09.940.FI	163H.09.940.FI
1240 mm	1226 mm	28,1 W	3000K	4408 lm	3637 lm	158 lm/W	163V.12.930.FI	163H.12.930.FI
			4000K	4667 lm	3850 lm	167 lm/W	163V.12.940.FI	163H.12.940.FI

CONNECTION KIT & ACCESSORIES

VERTICAL



CONTROL TYPE	LENGTH	ORDER CODE
NF, DL, CS	640 mm	273XX.06.FI
	940 mm	273XX.09.FI
	1240 mm	273XX.12.FI





ACCESSORY	CABLE	ON/OFF
Power Cable	1,5 m	80303001
	3 m	80303002
	5 m	80303003

HORIZONTAL



CONTROL TYPE	LENGTH	ORDER CODE
NF, DL, CS	626 mm	278XX.06.FI
	926 mm	278XX.09.FI
	1226 mm	278XX.12.FI




CONTROL TYPE	XX
ON/OFF	NF
DALI PUSH DIM	DA
CASAMBI	CS

FINISHING	FI
	Textured Black TB
	Textured White TW

IRIS 360°

IP65 - WATERPROOF



LENGTH	POWER	CCT	LED LUMENS	LUMINAIRE LM	EFFICACY	ORDER CODE
600 mm	15,0 W	3000K	2926 lm	2414 lm	195 lm/W	207XX.06.930.AL
		4000K	3098 lm	2556 lm	207 lm/W	207XX.06.940.AL
900 mm	21,0 W	3000K	4096 lm	3379 lm	195 lm/W	207XX.09.930.AL
		4000K	4337 lm	3578 lm	207 lm/W	207XX.09.940.AL
1200 mm	25,8 W	3000K	5033 lm	4151 lm	195 lm/W	207XX.12.930.AL
		4000K	5329 lm	4396 lm	207 lm/W	207XX.12.940.AL
1500 mm	36,0 W	3000K	7022 lm	5793 lm	195 lm/W	207XX.15.930.AL
		4000K	7435 lm	6134 lm	207 lm/W	207XX.15.940.AL



ACCESSORIES

VERTICAL




ACCESSORY	CABLE	ON/OFF	DIM CONTROL
Power Cable	1,5 m	80303001	80303004
	3 m	80303002	80303005
	5 m	80303003	80303006

IRIS 1500MM 36,0W 4000K



CONTROL TYPE	XX
ON/OFF	NF
DALI PUSH DIM	DA

FINISHING	FI
Aluminium	AL

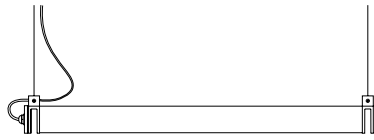

IRIS 180°

IP65 - WATERPROOF

CRI >80

LENGTH	POWER	CCT	LED LUMENS	LUMENS LM.	EFFICACY	ORDER CODE
600 mm	19,1 W	3000K	2430 lm	2005 lm	127 lm/W	165XX.06.830.FI
		4000K	2560 lm	2112 lm	134 lm/W	165XX.06.840.FI
900 mm	28,7 W	3000K	3645 lm	3007 lm	127 lm/W	165XX.09.830.FI
		4000K	3840 lm	3168 lm	134 lm/W	165XX.09.840.FI
1200 mm	38,2 W	3000K	4860 lm	4010 lm	127 lm/W	165XX.12.830.FI
		4000K	5120 lm	4224 lm	134 lm/W	165XX.12.840.FI
1500 mm	47,7 W	3000K	6075 lm	5012 lm	127 lm/W	165XX.15.830.FI
		4000K	6400 lm	5280 lm	134 lm/W	165XX.15.840.FI

CRI >90

LENGTH	POWER	CCT	LED LUMENS	LUMENS LM.	EFFICACY	ORDER CODE
600 mm	19,1 W	3000K	2292 lm	1891 lm	120 lm/W	208XX.06.930.FI
		4000K	2401 lm	1981 lm	126 lm/W	208XX.06.940.FI
900 mm	28,7 W	3000K	3438 lm	2836 lm	120 lm/W	208XX.09.930.FI
		4000K	3602 lm	2971 lm	126 lm/W	208XX.09.940.FI
1200 mm	38,2 W	3000K	4584 lm	3782 lm	120 lm/W	208XX.12.930.FI
		4000K	4802 lm	3962 lm	126 lm/W	208XX.12.940.FI
1500 mm	47,7 W	3000K	5730 lm	4727 lm	120 lm/W	208XX.15.930.FI
		4000K	6003 lm	4952 lm	126 lm/W	208XX.15.940.FI

ACCESSORIES



ACCESSORY	CABLE	ON/OFF	DALI
Power Cable	1 m	80300673	80300669
	1,5 m	80300674	80300670
	3 m	80300675	80300671
	5 m	80300676	80300672




ACCESSORY	CABLE	ON/OFF	DALI
Power Cable	1,5 m	80303001	80303004
	3 m	80303002	80303005
	5 m	80303003	80303006



ACCESSORY	CABLE	ORDER CODE
Suspension Kit	1 m	80303046
	1,5 m	80303043
	3 m	80303044
	5 m	80303045



ACCESSORY	ORDER CODE
Fixing Clamp (2 units)	80303056



COR. COL. TEMP	CT
3000K	30
4000K	40
*5000K	50

*only available for CRI>80

CONTROL TYPE	XX
ON/OFF	NF
DALI PUSH DIM	DA

FINISHING	FI
Aluminium	AL





IRIS BY

brilumen[®]

