

DESCRIPTION


IRIS tubular 360° is an elegant lighting fixture with a minimalist design. It is available from 300mm to 1500mm lengths ranging. Drawing a perfect linear light, IRIS is suitable for lighting up effectively any indoor area through a beautiful, uniform and harmonious light. Tubular fixture composed of an opal polycarbonate tube and aluminium end caps; white or black textured finish; 360° light emission. IRIS can be suspended horizontally or vertically, surface mounted or recessed in the ceiling. It can also be placed in a 48V or in a 3-circuits universal track. In both cases, it can be combined with other Brilumen track lights.

LIGHT DISTRIBUTION Direct
 WARRANTY 5 Years
 CONTROL N/A

LED FEATURES

CRI CRI→90
 LIFESPAN 50.000 Hours
 STEPS MACADAM 3 Steps MacAdam
 LUMEN MAINTENANCE L90/B50
 PHOTOBIOLOGICAL RISK RG1

ICONOGRAPHY

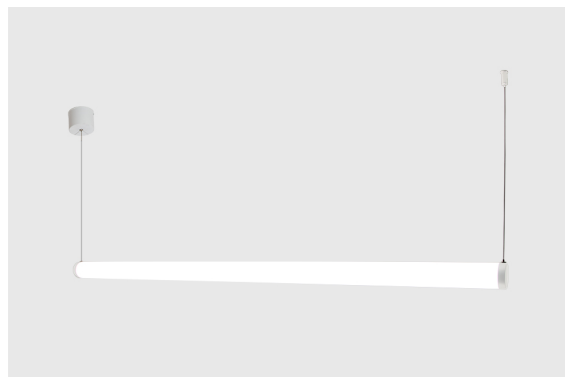

TECHNICAL DRAWING



IRIS 360 HORIZONTAL
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
326	8.5	TB, TW	3000K	N/A	1369	1129	5163H.03.930.FI
326	8.5	TB, TW	4000K	N/A	1454	1199	5163H.03.940.FI
626	17	TB, TW	3000K	N/A	2737	2258	5163H.06.930.FI
626	17	TB, TW	4000K	N/A	2907	2398	5163H.06.940.FI
926	23.8	TB, TW	3000K	N/A	3832	3161	5163H.09.930.FI
926	23.8	TB, TW	4000K	N/A	4070	3358	5163H.09.940.FI
1226	30.6	TB, TW	3000K	N/A	4927	4064	5163H.12.930.FI
1226	30.6	TB, TW	4000K	N/A	5233	4317	5163H.12.940.FI
1526	40.8	TB, TW	3000K	N/A	6569	5419	5163H.15.930.FI
1526	40.8	TB, TW	4000K	N/A	6977	5756	5163H.15.940.FI

SELECT YOUR PREFERRED
 OPTION

CONTROL TYPE	XX
N/A	N/A

COLOR TEMP.	CT
3000K	30
4000K	40

FINISHING	FI
Textured Black	TB
Textured White	TW

ACCESSORIES



Round Surf. Box IRIS H
 1226 mm Textured Black
 1226 mm Textured White
 326 mm Textured Black
 326 mm Textured White
 626 mm Textured Black
 626 mm Textured White
 926 mm Textured Black
 926 mm Textured White

ON/OFF
 275NF.12.TB
 275NF.12.TW
 275NF.03.TB
 275NF.03.TW
 275NF.06.TB
 275NF.06.TW
 275NF.09.TB
 275NF.09.TW



Oval Surf. Box IRIS H
 1226 mm Textured Black
 1226 mm Textured White
 1526 mm Textured Black
 1526 mm Textured White
 326 mm Textured Black
 326 mm Textured White
 626 mm Textured Black
 626 mm Textured White
 926 mm Textured Black

ON/OFF DALI Push CASAMBI
 276NF.12.TB 276DA.12.TB 276CS.12.TB
 276NF.12.TW 276DA.12.TW 276CS.12.TW
 276NF.15.TB 276DA.15.TB 276CS.15.TB
 276NF.15.TW 276DA.15.TW 276CS.15.TW
 276NF.03.TB 276DA.03.TB 276CS.03.TB
 276NF.03.TW 276DA.03.TW 276CS.03.TW
 276NF.06.TB 276DA.06.TB 276CS.06.TB
 276NF.06.TW 276DA.06.TW 276CS.06.TW
 276NF.09.TB 276DA.09.TB 276CS.09.TB



926 mm Textured White
 Round Reces. Box IRIS H.
 1226 mm Textured Black
 1226 mm Textured White
 1526 mm Textured Black
 1526 mm Textured White
 326 mm Textured Black
 326 mm Textured White
 626 mm Textured Black
 626 mm Textured White
 926 mm Textured Black
 926 mm Textured White

276NF.09.TW	276DA.09.TW	276CS.09.TW
ON/OFF	DALI Push	CASAMBI
277NF.12.TB	277DA.12.TB	277CS.12.TB
277NF.12.TW	277DA.12.TW	277CS.12.TW
277NF.15.TB	277DA.15.TB	277CS.15.TB
277NF.15.TW	277DA.15.TW	277CS.15.TW
277NF.03.TB	277DA.03.TB	
277NF.03.TW	277DA.03.TW	277CS.03.TW
277NF.06.TB	277DA.06.TB	277CS.06.TB
277NF.06.TW	277DA.06.TW	277CS.06.TW
277NF.09.TB	277DA.09.TB	277CS.09.TB
277NF.09.TW	277DA.09.TW	277CS.09.TW



Power Cable Iris
 Power Cable 3m
 Power Cable 5m
 Power Cable Iris 1,5m
 Power Cable Iris 1m

Universal
 80303041
 80303042
 80303040
 2080-042



Suspension Kit IRIS
 Suspensio cable Iris 1,5m
 Suspension cable Iris 1m
 Suspension cable Iris 3m
 Suspension cable Iris 5m

Universal
 80303043
 80303046
 80303044
 80303045