


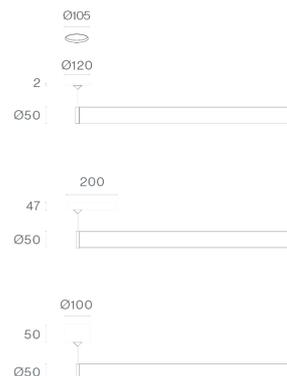
DESCRIPTION

IRIS tubular 360° is an elegant lighting fixture with a minimalist design. It is available from 300mm to 1500mm lengths ranging. Drawing a perfect linear light, IRIS is suitable for lighting up effectively any indoor area through a beautiful, uniform and harmonious light. Tubular fixture composed of an opal polycarbonate tube and aluminium end caps; white or black textured finish; 360° light emission. IRIS can be suspended horizontally or vertically, surface mounted or recessed in the ceiling. It can also be placed in a 48V or in a 3-circuits universal track. In both cases, it can be combined with other Brilumen track lights.

DISTRIBUICAOLUZ Direct
 WARRANTY 5 Years
 CONTROL N/A

LED FEATURES

CRI CRI→90
 LIFESPAN 50.000 Hours
 STEPS MACADAM 3 Steps MacAdam
 LUMEN MAINTENANCE L90/B50
 PHOTOBIOLOGICAL RISK RG1

ICONOGRAPHY

TECHNICAL DRAWING

IRIS 360 HORIZONTAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
326	8.5	TB, TW	3000K	N/A	1369	1129	5163H.03.930.FI
326	8.5	TB, TW	4000K	N/A	1454	1199	5163H.03.940.FI
626	17	TB, TW	3000K	N/A	2737	2258	5163H.06.930.FI
626	17	TB, TW	4000K	N/A	2907	2398	5163H.06.940.FI
926	23.8	TB, TW	3000K	N/A	3832	3161	5163H.09.930.FI
926	23.8	TB, TW	4000K	N/A	4070	3358	5163H.09.940.FI
1226	30.6	TB, TW	3000K	N/A	4927	4064	5163H.12.930.FI
1226	30.6	TB, TW	4000K	N/A	5233	4317	5163H.12.940.FI
1526	40.8	TB, TW	3000K	N/A	6569	5419	5163H.15.930.FI
1526	40.8	TB, TW	4000K	N/A	6977	5756	5163H.15.940.FI

SELECT YOUR PREFERRED
 OPTION

CONTROLTYPE XX
 N/A N/A

COLOR TEMP. CT
 3000K 30
 4000K 40

FINISHING FI
 Textured Black TB
 Textured White TW

ACCESSORIES


Round Surf. Box IRIS H
 1226 mm Textured Black 275NF.12.TB
 1226 mm Textured White 275NF.12.TW
 326 mm Textured Black 275NF.03.TB
 326 mm Textured White 275NF.03.TW
 626 mm Textured Black 275NF.06.TB
 626 mm Textured White 275NF.06.TW
 926 mm Textured Black 275NF.09.TB
 926 mm Textured White 275NF.09.TW



Oval Surf. Box IRIS H
 1226 mm Textured Black 276NF.12.TB DALI Push 276DA.12.TB CASAMBI 276CS.12.TB
 1226 mm Textured White 276NF.12.TW 276DA.12.TW 276CS.12.TW
 1526 mm Textured Black 276NF.15.TB 276DA.15.TB 276CS.15.TB
 1526 mm Textured White 276NF.15.TW 276DA.15.TW 276CS.15.TW
 326 mm Textured Black 276NF.03.TB 276DA.03.TB 276CS.03.TB
 326 mm Textured White 276NF.03.TW 276DA.03.TW 276CS.03.TW
 626 mm Textured Black 276NF.06.TB 276DA.06.TB 276CS.06.TB
 626 mm Textured White 276NF.06.TW 276DA.06.TW 276CS.06.TW
 926 mm Textured Black 276NF.09.TB 276DA.09.TB 276CS.09.TB



926 mm Textured White
Round Reces. Box IRIS H.
1226 mm Textured Black
1226 mm Textured White
1526 mm Textured Black
1526 mm Textured White
326 mm Textured Black
326 mm Textured White
626 mm Textured Black
626 mm Textured White
926 mm Textured Black
926 mm Textured White

276NF.09.TW	276DA.09.TW	276CS.09.TW
ON/OFF	DALI Push	CASAMBI
277NF.12.TB	277DA.12.TB	277CS.12.TB
277NF.12.TW	277DA.12.TW	277CS.12.TW
277NF.15.TB	277DA.15.TB	277CS.15.TB
277NF.15.TW	277DA.15.TW	277CS.15.TW
277NF.03.TB	277DA.03.TB	
277NF.03.TW	277DA.03.TW	277CS.03.TW
277NF.06.TB	277DA.06.TB	277CS.06.TB
277NF.06.TW	277DA.06.TW	277CS.06.TW
277NF.09.TB	277DA.09.TB	277CS.09.TB
277NF.09.TW	277DA.09.TW	277CS.09.TW



Power Cable Iris
Power Cable 3m
Power Cable 5m
Power Cable Iris 1,5m
Power Cable Iris 1m

Universal
80303041
80303042
80303040
2080-042



Suspension Kit IRIS
Suspensio cable Iris 1,5m
Suspension cable Iris 1m
Suspension cable Iris 3m
Suspension cable Iris 5m

Universal
80303043
80303046
80303044
80303045