

DESCRIPTION

IRIS luminaire 360° combines elegance and functionality in a minimalist design, offering 360° light emission in a slim 50 mm diameter tube. Available in lengths ranging from 300 to 1500mm, it delivers uniform and harmonious linear lighting in any space. The tubular construction features an opal polycarbonate diffuser paired with textured aluminium end caps in black or white.

It can be installed suspended either horizontally or vertically, directly from the ceiling. It is also compatible with 48V EVO track systems and 230V 3-circuit universal tracks, allowing seamless integration with other Brilumen track lights and suspended fittings.

IRIS is available with ON/OFF, DALI or CASAMBI control options, and in 3000K or 4000K colour temperatures. It comes with a 5-year warranty, IP40 protection rating and a CRI→90.

To order, simply select the desired luminaire length, then choose the accessories, power/suspension cable length, and the power box housing the remote driver. You can opt for a surface-mounted power box (round or oval) or a recessed round version.

LIGHT DISTRIBUTION	360°
WARRANTY	5 Years
CONTROL	N/A

LED FEATURES

CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY



**IRIS 360 HORIZONTAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
326	8,5	TB, TW	3000K	N/A	1369	1129	5163H.03.930.FI
326	8,5	TB, TW	4000K	N/A	1454	1199	5163H.03.940.FI
626	17	TB, TW	3000K	N/A	2737	2258	5163H.06.930.FI
626	17	TB, TW	4000K	N/A	2907	2398	5163H.06.940.FI
926	23,8	TB, TW	3000K	N/A	3832	3161	5163H.09.930.FI
926	23,8	TB, TW	4000K	N/A	4070	3358	5163H.09.940.FI
1226	30,6	TB, TW	3000K	N/A	4927	4064	5163H.12.930.FI
1226	30,6	TB, TW	4000K	N/A	5233	4317	5163H.12.940.FI
1526	40,8	TB, TW	3000K	N/A	6569	5419	5163H.15.930.FI
1526	40,8	TB, TW	4000K	N/A	6977	5756	5163H.15.940.FI

SELECT YOUR PREFERRED
OPTION

CONTROLTYPE	XX
N/A	N/A

COLOR TEMP.	CT
3000K	30
4000K	40

FINISHING	FI
Textured Black	TB
Textured White	TW


ACCESSORIES




Round Surf. Box IRIS H	ON/OFF
1226 mm Textured Black	275NF.12.TB
1226 mm Textured White	275NF.12.TW
326 mm Textured Black	275NF.03.TB
326 mm Textured White	275NF.03.TW
626 mm Textured Black	275NF.06.TB
626 mm Textured White	275NF.06.TW
926 mm Textured Black	275NF.09.TB
926 mm Textured White	275NF.09.TW



Oval Surf. Box IRIS H.	ON/OFF	DALI Push	CASAMBI
1226 mm Textured Black	276NF.12.TB	276DA.12.TB	276CS.12.TB
1226 mm Textured White	276NF.12.TW	276DA.12.TW	276CS.12.TW
1526 mm Textured Black	276NF.15.TB	276DA.15.TB	276CS.15.TB
1526 mm Textured White	276NF.15.TW	276DA.15.TW	276CS.15.TW
326 mm Textured Black	276NF.03.TB	276DA.03.TB	276CS.03.TB
326 mm Textured White	276NF.03.TW	276DA.03.TW	276CS.03.TW
626 mm Textured Black	276NF.06.TB	276DA.06.TB	276CS.06.TB
626 mm Textured White	276NF.06.TW	276DA.06.TW	276CS.06.TW
926 mm Textured Black	276NF.09.TB	276DA.09.TB	276CS.09.TB

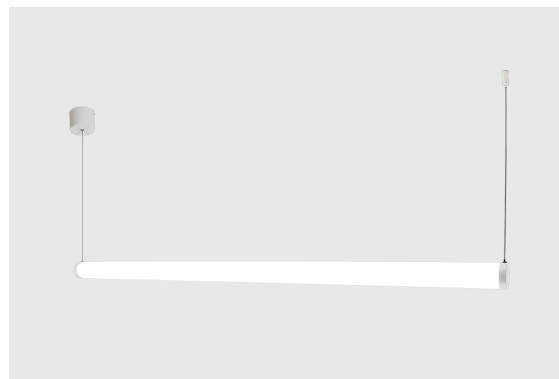

TECHNICAL DRAWING

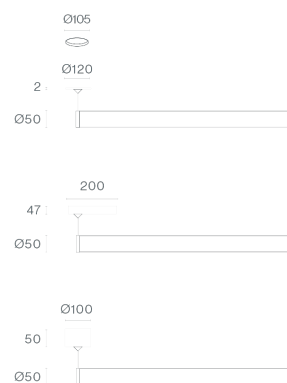



926 mm Textured White
 Round Reces. Box IRIS H.
 1226 mm Textured Black
 1226 mm Textured White
 1526 mm Textured Black
 1526 mm Textured White
 326 mm Textured Black
 326 mm Textured White
 626 mm Textured Black
 626 mm Textured White
 926 mm Textured Black
 926 mm Textured White

276NF.09.TW	276DA.09.TW	276CS.09.TW
ON/OFF	DALI Push	CASAMBI
277NF.12.TB	277DA.12.TB	277CS.12.TB
277NF.12.TW	277DA.12.TW	277CS.12.TW
277NF.15.TB	277DA.15.TB	277CS.15.TB
277NF.15.TW	277DA.15.TW	277CS.15.TW
277NF.03.TB	277DA.03.TB	
277NF.03.TW	277DA.03.TW	277CS.03.TW
277NF.06.TB	277DA.06.TB	277CS.06.TB
277NF.06.TW	277DA.06.TW	277CS.06.TW
277NF.09.TB	277DA.09.TB	277CS.09.TB
277NF.09.TW	277DA.09.TW	277CS.09.TW



Power Cable Iris
 Power Cable 3m
 Power Cable 5m
 Power Cable Iris 1,5m
 Power Cable Iris 1m

Universal
 80303041
 80303042
 80303040
 2080-042



Suspension Kit IRIS
 Suspensio cable Iris 1,5m
 Suspension cable Iris 1m
 Suspension cable Iris 3m
 Suspension cable Iris 5m

Universal
 80303043
 80303046
 80303044
 80303045