

**DESCRIPTION**

IRIS luminaire 360° combines elegance and functionality in a minimalist design, offering 360° light emission in a slim 50 mm diameter tube. Available in lengths ranging from 300 to 1500mm, it delivers uniform and harmonious linear lighting in any space. The tubular construction features an opal polycarbonate diffuser paired with textured aluminium end caps in black or white.

It can be installed suspended either horizontally or vertically, directly from the ceiling. It is also compatible with 48V EVO track systems and 230V 3-circuit universal tracks, allowing seamless integration with other Brilumen track lights and suspended fittings.

IRIS is available with ON/OFF, DALI or CASAMBI control options, and in 3000K or 4000K colour temperatures. It comes with a 5-year warranty, IP40 protection rating and a CRI→90.

To order, simply select the desired luminaire length, then choose the accessories, power/suspension cable length, and the power box housing the remote driver. You can opt for a surface-mounted power box (round or oval) or a recessed round version.

LIGHT DISTRIBUTION	360°
WARRANTY	5 Years
CONTROL	N/A

**LED FEATURES**

CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

**ICONOGRAPHY**

**IRIS 360 VERTICAL  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
340	8,5	TB, TW	3000K	N/A	1369	1129	5163V.03.930.FI
340	8,5	TB, TW	4000K	N/A	1454	1199	5163V.03.940.FI
640	17	TB, TW	3000K	N/A	2737	2258	5163V.06.930.FI
640	17	TB, TW	4000K	N/A	2907	2398	5163V.06.940.FI
940	23,8	TB, TW	3000K	N/A	3832	3161	5163V.09.930.FI
940	23,8	TB, TW	4000K	N/A	4070	3358	5163V.09.940.FI
1240	30,6	TB, TW	3000K	N/A	4927	4064	5163V.12.930.FI
1240	30,6	TB, TW	4000K	N/A	5233	4317	5163V.12.940.FI
1540	40,8	TB, TW	3000K	N/A	6569	5419	5163V.15.930.FI
1540	40,8	TB, TW	4000K	N/A	6977	5756	5163V.15.940.FI

**SELECT YOUR PREFERRED  
OPTION**

CONTROLTYPE	XX
N/A	N/A

COLOR TEMP.	CT
3000K	30
4000K	40

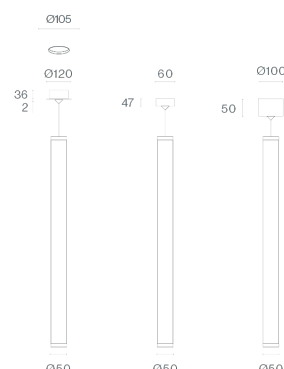
FINISHING	FI
Textured Black	TB
Textured White	TW

**ACCESSORIES**


Round Surf. Box IRIS V.	ON/OFF
1240 mm Textured Black	270NF.12.TB
1240 mm Textured White	270NF.12.TW
340 mm Textured Black	270NF.03.TB
340 mm Textured White	270NF.03.TW
640 mm Textured Black	270NF.06.TB
640 mm Textured White	270NF.06.TW
940 mm Textured Black	270NF.09.TB
940 mm Textured White	270NF.09.TW



Oval Surf. Box IRIS V.	ON/OFF	DALI Push	CASAMBI
1240 mm Textured Black	271NF.12.TB	271DA.12.TB	271CS.12.TB
1240 mm Textured White	271NF.12.TW	271DA.12.TW	271CS.12.TW
1540 mm Textured Black	271NF.15.TB	271DA.15.TB	271CS.15.TB
1540 mm Textured White	271NF.15.TW	271DA.15.TW	271CS.15.TW
340 mm Textured Black	271NF.03.TB	271DA.03.TB	271CS.03.TB
340 mm Textured White	271NF.03.TW	271DA.03.TW	271CS.03.TW
640 mm Textured Black	271NF.06.TB	271DA.06.TB	271CS.06.TB
640 mm Textured White	271NF.06.TW	271DA.06.TW	271CS.06.TW
940 mm Textured Black	271NF.09.TB	271DA.09.TB	271CS.09.TB


**TECHNICAL DRAWING**




940 mm Textured White  
 Round Reces. Box IRIS V.  
 1240 mm Textured Black  
 1240 mm Textured White  
 1540 mm Textured Black  
 1540 mm Textured White  
 340 mm Textured Black  
 340 mm Textured White  
 640 mm Textured Black  
 640 mm Textured White  
 940 mm Textured Black  
 940 mm Textured White  
 Power Cable Iris  
 Power Cable 3m  
 Power Cable 5m  
 Power Cable Iris 1,5m  
 Power Cable Iris 1m



271NF.09.TW	271DA.09.TW	271CS.09.TW
ON/OFF	DALI Push	CASAMBI
272NF.12.TB	272DA.12.TB	272CS.12.TB
272NF.12.TW	272DA.12.TW	272CS.12.TW
272NF.15.TB	272DA.15.TB	272CS.15.TB
272NF.15.TW	272DA.15.TW	272CS.15.TW
272NF.03.TB	272DA.03.TB	272CS.03.TB
272NF.03.TW	272DA.03.TW	272CS.03.TW
272NF.06.TB	272DA.06.TB	272CS.06.TB
272NF.06.TW	272DA.06.TW	272CS.06.TW
272NF.09.TB	272DA.09.TB	272CS.09.TB
272NF.09.TW	272DA.09.TW	272CS.09.TW
Universal		
80303041		
80303042		
80303040		
2080-042		