

DESCRIPTION

IRIS tubular 360° is an elegant lighting fixture with a minimalist design. It is available from 300mm to 1500mm lengths ranging. Drawing a perfect linear light, IRIS is suitable for lighting up effectively any indoor area through a beautiful, uniform and harmonious light. Tubular fixture composed of an opal polycarbonate tube and aluminium end caps; white or black textured finish; 360° light emission. IRIS can be suspended horizontally or vertically, surface mounted or recessed in the ceiling. It can also be placed in a 48V or in a 3-circuits universal track. In both cases, it can be combined with other Brilumen track lights.

DISTRIBUICAOLUZ Direct  
WARRANTY 5 Years  
CONTROL N/A


LED FEATURES

CRI CRI→90  
LIFESPAN 50.000 Hours  
STEPS MACADAM 3 Steps MacAdam  
LUMEN MAINTENANCE L90/B50  
PHOTOBIOLOGICAL RISK RG1

ICONOGRAPHY



TECHNICAL DRAWING

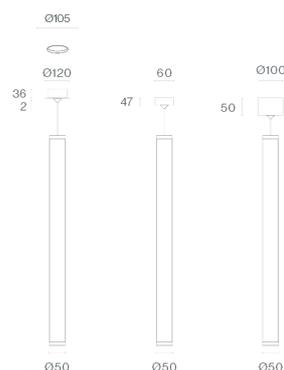

IRIS 360 VERTICAL  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROLTYPE	LED LUMENS	LUMINAIRE LM	CODE
340	8.5	TB, TW	3000K	N/A	1369	1129	5163V.03.930.FI
340	8.5	TB, TW	4000K	N/A	1454	1199	5163V.03.940.FI
640	17	TB, TW	3000K	N/A	2737	2258	5163V.06.930.FI
640	17	TB, TW	4000K	N/A	2907	2398	5163V.06.940.FI
940	23.8	TB, TW	3000K	N/A	3832	3161	5163V.09.930.FI
940	23.8	TB, TW	4000K	N/A	4070	3358	5163V.09.940.FI
1240	30.6	TB, TW	3000K	N/A	4927	4064	5163V.12.930.FI
1240	30.6	TB, TW	4000K	N/A	5233	4317	5163V.12.940.FI
1540	40.8	TB, TW	3000K	N/A	6569	5419	5163V.15.930.FI
1540	40.8	TB, TW	4000K	N/A	6977	5756	5163V.15.940.FI

SELECT YOUR PREFERRED  
OPTION

CONTROLTYPE	XX
N/A	N/A

COLOR TEMP.	CT
3000K	30
4000K	40

FINISHING	FI
Textured Black	TB
Textured White	TW

ACCESSORIES



Round Surf. Box IRIS V.  
1240 mm Textured Black  
1240 mm Textured White  
340 mm Textured Black  
340 mm Textured White  
640 mm Textured Black  
640 mm Textured White  
940 mm Textured Black  
940 mm Textured White

ON/OFF  
270NF.12.TB  
270NF.12.TW  
270NF.03.TB  
270NF.03.TW  
270NF.06.TB  
270NF.06.TW  
270NF.09.TB  
270NF.09.TW



Oval Surf. Box IRIS V.  
1240 mm Textured Black  
1240 mm Textured White  
1540 mm Textured Black  
1540 mm Textured White  
340 mm Textured Black  
340 mm Textured White  
640 mm Textured Black  
640 mm Textured White  
940 mm Textured Black

ON/OFF DALI Push CASAMBI  
271NF.12.TB 271DA.12.TB 271CS.12.TB  
271NF.12.TW 271DA.12.TW 271CS.12.TW  
271NF.15.TB 271DA.15.TB 271CS.15.TB  
271NF.15.TW 271DA.15.TW 271CS.15.TW  
271NF.03.TB 271DA.03.TB 271CS.03.TB  
271NF.03.TW 271DA.03.TW 271CS.03.TW  
271NF.06.TB 271DA.06.TB 271CS.06.TB  
271NF.06.TW 271DA.06.TW 271CS.06.TW  
271NF.09.TB 271DA.09.TB 271CS.09.TB



940 mm Textured White  
Round Recess. Box IRIS V.  
1240 mm Textured Black  
1240 mm Textured White  
1540 mm Textured Black  
1540 mm Textured White  
340 mm Textured Black  
340 mm Textured White  
640 mm Textured Black  
640 mm Textured White  
940 mm Textured Black  
940 mm Textured White  
Power Cable Iris  
Power Cable 3m  
Power Cable 5m  
Power Cable Iris 1,5m  
Power Cable Iris 1m



271NF.09.TW	271DA.09.TW	271CS.09.TW
ON/OFF	DALI Push	CASAMBI
272NF.12.TB	272DA.12.TB	272CS.12.TB
272NF.12.TW	272DA.12.TW	272CS.12.TW
272NF.15.TB	272DA.15.TB	272CS.15.TB
272NF.15.TW	272DA.15.TW	272CS.15.TW
272NF.03.TB	272DA.03.TB	272CS.03.TB
272NF.03.TW	272DA.03.TW	272CS.03.TW
272NF.06.TB	272DA.06.TB	272CS.06.TB
272NF.06.TW	272DA.06.TW	272CS.06.TW
272NF.09.TB	272DA.09.TB	272CS.09.TB
272NF.09.TW	272DA.09.TW	272CS.09.TW
Universal		
80303041		
80303042		
80303040		
2080-042		