

DESCRIPTION

IRIS tubular 360° is an elegant lighting fixture with a minimalist design. It is available from 300mm to 1500mm lengths ranging. Drawing a perfect linear light, IRIS is suitable for lighting up effectively any indoor area through a beautiful, uniform and harmonious light. Tubular fixture composed of an opal polycarbonate tube and aluminium end caps; white or black textured finish; 360° light emission. IRIS can be suspended horizontally or vertically, surface mounted or recessed in the ceiling. It can also be placed in a magnetic or in a 3-circuits universal track. In both cases, it can be combined with other Brilumen track lights.

LIGHT DISTRIBUTION Direct
WARRANTY 5 Years
CONTROL N/A


LED FEATURES

CRI CRI→90
LIFESPAN 50.000 Hours
STEPS MACADAM 3 Steps MacAdam
LUMEN MAINTENANCE L90/B50
PHOTOBIOLOGICAL RISK RG1

ICONOGRAPHY



TECHNICAL DRAWING

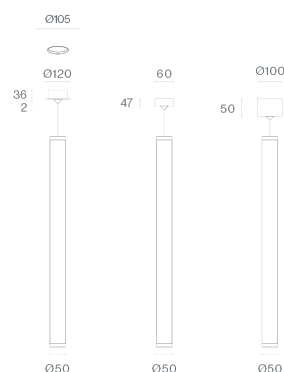

IRIS 360 VERTICAL
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
340	8.5	TB, TW	3000K	N/A	1369	1129	5163V.03.930.FI
340	8.5	TB, TW	4000K	N/A	1454	1199	5163V.03.940.FI
640	17	TB, TW	3000K	N/A	2737	2258	5163V.06.930.FI
640	17	TB, TW	4000K	N/A	2907	2398	5163V.06.940.FI
940	23.8	TB, TW	3000K	N/A	3832	3161	5163V.09.930.FI
940	23.8	TB, TW	4000K	N/A	4070	3358	5163V.09.940.FI
1240	30.6	TB, TW	3000K	N/A	4927	4064	5163V.12.930.FI
1240	30.6	TB, TW	4000K	N/A	5233	4317	5163V.12.940.FI
1540	40.8	TB, TW	3000K	N/A	6569	5419	5163V.15.930.FI
1540	40.8	TB, TW	4000K	N/A	6977	5756	5163V.15.940.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX
N/A	N/A

COLOR TEMP.	CT
3000K	30
4000K	40

FINISHING	FI
Textured Black	TB
Textured White	TW

ACCESSORIES



Round Surf. Box IRIS V.
1240 mm Textured Black 270NF.12.TB
1240 mm Textured White 270NF.12.TW
340 mm Textured Black 270NF.03.TB
340 mm Textured White 270NF.03.TW
640 mm Textured Black 270NF.06.TB
640 mm Textured White 270NF.06.TW
940 mm Textured Black 270NF.09.TB
940 mm Textured White 270NF.09.TW



Oval Surf. Box IRIS V.
ON/Off DALI Push CASAMBI
1240 mm Textured Black 271NF.12.TB 271DA.12.TB 271CS.12.TB
1240 mm Textured White 271NF.12.TW 271DA.12.TW 271CS.12.TW
1540 mm Textured Black 271NF.15.TB 271DA.15.TB 271CS.15.TB
1540 mm Textured White 271NF.15.TW 271DA.15.TW 271CS.15.TW
340 mm Textured Black 271NF.03.TB 271DA.03.TB 271CS.03.TB
340 mm Textured White 271NF.03.TW 271DA.03.TW 271CS.03.TW
640 mm Textured Black 271NF.06.TB 271DA.06.TB 271CS.06.TB
640 mm Textured White 271NF.06.TW 271DA.06.TW 271CS.06.TW
940 mm Textured Black 271NF.09.TB 271DA.09.TB 271CS.09.TB



940 mm Textured White
Round Recess. Box IRIS V.
1240 mm Textured Black
1240 mm Textured White
1540 mm Textured Black
1540 mm Textured White
340 mm Textured Black
340 mm Textured White
640 mm Textured Black
640 mm Textured White
940 mm Textured Black
940 mm Textured White



Power Cable Iris
Power Cable 3m
Power Cable 5m
Power Cable Iris 1,5m
Power Cable Iris 1m

271NF.09.TW	271DA.09.TW	271CS.09.TW
ON/Off	DALI Push	CASAMBI
272NF.12.TB	272DA.12.TB	272CS.12.TB
272NF.12.TW	272DA.12.TW	272CS.12.TW
272NF.15.TB	272DA.15.TB	272CS.15.TB
272NF.15.TW	272DA.15.TW	272CS.15.TW
272NF.03.TB	272DA.03.TB	272CS.03.TB
272NF.03.TW	272DA.03.TW	272CS.03.TW
272NF.06.TB	272DA.06.TB	272CS.06.TB
272NF.06.TW	272DA.06.TW	272CS.06.TW
272NF.09.TB	272DA.09.TB	272CS.09.TB
272NF.09.TW	272DA.09.TW	272CS.09.TW
Universal		
80303041		
80303042		
80303040		
2080-042		