

DESCRIPTION


A solution that combines elegance and functionality. Available in a wide range of lengths, IRIS casts a perfect linear light, ensuring uniform and harmonious lighting in any room. Its tubular construction features an opal polycarbonate tube paired with aluminum end caps.

LIGHT DISTRIBUTION	Direct
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	DALI / Switch Dim, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 167 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY



TECHNICAL DRAWING

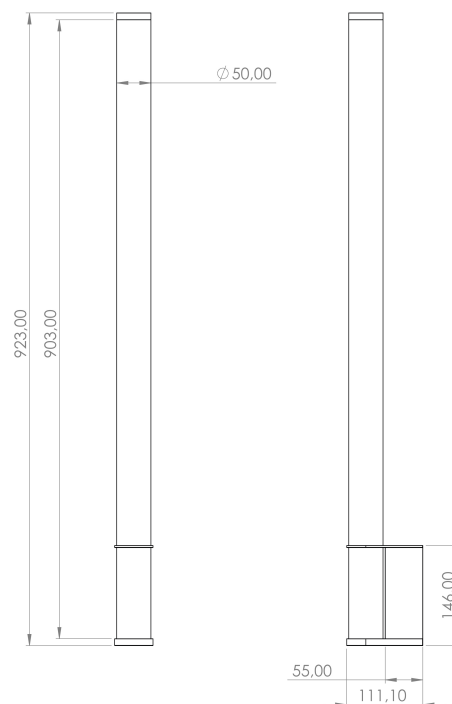

IRIS S 360
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	COLOR TEMP.	CONTROL TYPE	LED LUMENS	LUMINAIRE LM	CODE
175	3.1	TB, TW	3000K	DA, NF	490	404	159XX.01.930.FI
175	3.1	TB, TW	4000K	DA, NF	519	428	159XX.01.940.FI
320	7.8	TB, TW	3000K	DA, NF	1225	1011	159XX.03.930.FI
320	7.8	TB, TW	4000K	DA, NF	1297	1070	159XX.03.940.FI
620	15.6	TB, TW	3000K	DA, NF	2449	2021	159XX.06.930.FI
620	15.6	TB, TW	4000K	DA, NF	2593	2140	159XX.06.940.FI
920	21.9	TB, TW	3000K	DA, NF	3428	2828	159XX.09.930.FI
920	21.9	TB, TW	4000K	DA, NF	3630	2995	159XX.09.940.FI
1215	28.1	TB, TW	3000K	DA, NF	4408	3637	159XX.12.930.FI
1215	28.1	TB, TW	4000K	DA, NF	4667	3850	159XX.12.940.FI

SELECT YOUR PREFERRED
 OPTION

CONTROL TYPE	XX
DALI / Switch Dim	DA
ON/OFF	NF

COLOR TEMP.	CT
3000K	30
4000K	40

FINISHING	FI
Textured Black	TB
Textured White	TW