

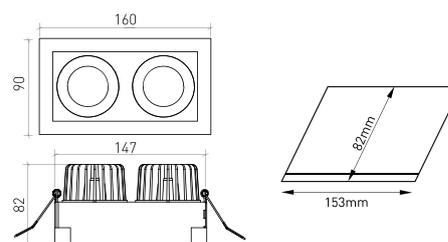
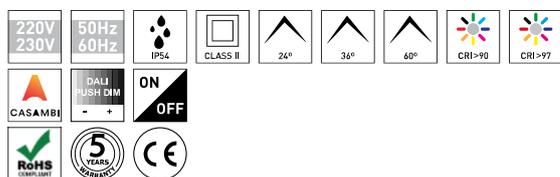
**DESCRIPTION**

Miró was already a regular choice, now when combined with Miró Duplo, it will provide the aesthetic and light balance so sought after by architects and interior designers in their projects. Miró Double was born from the desire expressed by the architects to combine the same range of lighting fixtures in a common space.

|                           |  |
|---------------------------|--|
| <b>MOUNTING TYPE</b>      | Recessed   |
| <b>LIGHT DISTRIBUTION</b> | Directa  |
| <b>WARRANTY</b>           | 5 Years  |
| <b>FINISHING</b>          | Textured Black, Textured White, Textured white and black |
| <b>CONTROL</b>            | CASAMBI, DALI / Switch Dim, ON/OFF                       |

**LED FEATURES**

|                             |                 |
|-----------------------------|-----------------|
| <b>LUMINOUS EFFICIENCY</b>  | UP TO 161 lm/W  |
| <b>CRI</b>                  | CRI→90, CRI→97  |
| <b>LIFESPAN</b>             | 50.000 Hours    |
| <b>STEPS MACADAM</b>        | 3 Steps MacAdam |
| <b>LUMEN MAINTENANCE</b>    | L90/B50         |
| <b>PHOTOBIOLOGICAL RISK</b> | RG1             |


**TECHNICAL DRAWING**

**ICONOGRAPHY**

**MIRÓ DOUBLE DOWNLIGHT  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

| LENGTH | POWER | FINISHING   | CONTROL TYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE             |
|--------|-------|-------------|--------------|------------|------------|--------------|-------------|------------------|
| 160    | 16.2  | TB, TW, TWB | CS, DA, NF   | 24, 36, 60 | 2406       | 2045         | 2700K       | 5350XX.BA.927.FI |
| 160    | 16.2  | TB, TW, TWB | CS, DA, NF   | 24, 36, 60 | 2487       | 2114         | 3000K       | 5350XX.BA.930.FI |
| 160    | 16.2  | TB, TW, TWB | CS, DA, NF   | 24, 36, 60 | 2600       | 2210         | 4000K       | 5350XX.BA.940.FI |

SELECT YOUR PREFERRED  
OPTION

| CONTROL TYPE      | XX | FINISHING                | FI  | BEAM ANGLE | BA |
|-------------------|----|--------------------------|-----|------------|----|
| CASAMBI           | CS | Textured Black           | TB  | 24°        | 24 |
| DALI / Switch Dim | DA | Textured White           | TW  | 36°        | 36 |
| ON/OFF            | NF | Textured white and black | TWB | 60°        | 60 |


**MIRÓ DOUBLE DOWNLIGHT  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97**

| LENGTH | POWER | FINISHING   | CONTROL TYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE              |
|--------|-------|-------------|--------------|------------|------------|--------------|-------------|-------------------|
| 160    | 17.7  | TB, TW, TWB | CS, DA, NF   | 24, 36, 60 | 1836       | 1560         | 2700K       | 5350XX.BA.9727.FI |
| 160    | 17.7  | TB, TW, TWB | CS, DA, NF   | 24, 36, 60 | 1959       | 1665         | 3000K       | 5350XX.BA.9730.FI |
| 160    | 17.7  | TB, TW, TWB | CS, DA, NF   | 24, 36, 60 | 2065       | 1755         | 4000K       | 5350XX.BA.9740.FI |

SELECT YOUR PREFERRED  
OPTION

| CONTROL TYPE      | XX | FINISHING                | FI  | BEAM ANGLE | BA |
|-------------------|----|--------------------------|-----|------------|----|
| CASAMBI           | CS | Textured Black           | TB  | 24°        | 24 |
| DALI / Switch Dim | DA | Textured White           | TW  | 36°        | 36 |
| ON/OFF            | NF | Textured white and black | TWB | 60°        | 60 |