

**DESCRIPTION**

Technical lighting is increasingly considered in the planning of spaces and their purpose because every location has its own specific lighting requirements.

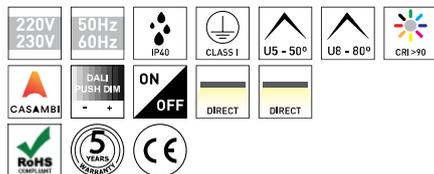
Therefore, we would like to introduce you to the ORIS 50mm on Track for a universal 230V track application, which promises to innovate and complement technical lighting solutions.

<b>MOUNTING TYPE</b>	Uni Track
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	CASAMBI, DALI / Switch Dim, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 155 lm/W
<b>CRI</b>	CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**


**ORIS 50 LOW GLARE 230V**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
850	23.3	TB, TW	CS, DA, NF	50, 80	3376	3207	3000K	5221XX.08U5.930.FI
850	23.3	TB, TW	CS, DA, NF	50, 80	3376	3207	3000K	5221XX.08U8.930.FI
850	23.3	TB, TW	CS, DA, NF	50, 80	3608	3428	4000K	5221XX.08U5.940.FI
850	23.3	TB, TW	CS, DA, NF	50, 80	3608	3428	4000K	5221XX.08U8.940.FI
1130	31	TB, TW	CS, DA, NF	50, 80	4501	4276	3000K	5221XX.11U5.930.FI
1130	31	TB, TW	CS, DA, NF	50, 80	4501	4276	3000K	5221XX.11U8.930.FI
1130	31	TB, TW	CS, DA, NF	50, 80	4811	4571	4000K	5221XX.11U5.940.FI
1130	31	TB, TW	CS, DA, NF	50, 80	4811	4571	4000K	5221XX.11U8.940.FI
1410	38.8	TB, TW	CS, DA, NF	50, 80	5626	5345	3000K	5221XX.14U5.930.FI
1410	38.8	TB, TW	CS, DA, NF	50, 80	5626	5345	3000K	5221XX.14U8.930.FI
1410	38.8	TB, TW	CS, DA, NF	50, 80	6014	5713	4000K	5221XX.14U5.940.FI
1410	38.8	TB, TW	CS, DA, NF	50, 80	6014	5713	4000K	5221XX.14U8.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	50°	50
DALI / Switch Dim	DA	Textured White	TW	80°	80
ON/OFF	NF				

**ACCESSORIES**

	Track ON/OFF Susp./Surf.	
	ON/OFF Track 1m Black	UP1459429-1
	ON/OFF Track 1m White	UP1459102-1
	ON/OFF Track 2m Black	UP1459429
	ON/OFF Track 2m White	UP1459102
	Track DALI Susp./Surf.	
	DALI Track 1m Black	UP1459439-1
	DALI Track 1m White	UP1459107-1
	DALI Track 2m Black	UP1459439
	DALI Track 2m White	UP1459107
	Recess. Track ON/OFF	
	ON/OFF Rec. Track 1m BL	UP1459312-1
	ON/OFF Rec. Track 1m WH	UP1459112-1
	ON/OFF Rec. Track 2m BL	UP1459312
	ON/OFF Rec. Track 2m WH	UP1459112



Recessed Track DALI  
DALI Rec. Track 1m BL  
DALI Rec. Track 1m WH  
DALI Rec. Track 2m BL  
DALI Rec. Track 2m WH

UP1459317-1  
UP1459117-1  
UP1459317  
UP1459117