

**DESCRIPTION**

Technical lighting is increasingly considered in the planning of spaces and their purpose because every location has its own specific lighting requirements.

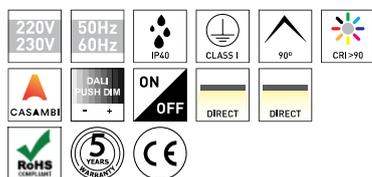
Therefore, we would like to introduce you to the ORIS 50mm on Track for a universal 230V track application, which promises to innovate and complement technical lighting solutions.

<b>MOUNTING TYPE</b>	Uni Track
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Anodized aluminium, Textured Black, Textured White
<b>CONTROL</b>	CASAMBI, DALI / Switch Dim, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 167 lm/W
<b>CRI</b>	CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**


**ORIS 50 OPAL 230V  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
850	20	AL, TB, TW	CS, DA, NF	90	3217	2348	3000K	5225XX.0809.930.FI
850	20	AL, TB, TW	CS, DA, NF	90	3337	2436	4000K	5225XX.0809.940.FI
1130	26.6	AL, TB, TW	CS, DA, NF	90	4289	3131	3000K	5225XX.1109.930.FI
1130	26.6	AL, TB, TW	CS, DA, NF	90	4449	3248	4000K	5225XX.1109.940.FI
1410	33.3	AL, TB, TW	CS, DA, NF	90	5361	3914	3000K	5225XX.1409.930.FI
1410	33.3	AL, TB, TW	CS, DA, NF	90	5561	4060	4000K	5225XX.1409.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Anodized aluminium	AL	90°	90
DALI / Switch Dim	DA	Textured Black	TB		
ON/OFF	NF	Textured White	TW		

**ACCESSORIES**

	Track ON/OFF Susp./Surf. ON/OFF Track 1m Black ON/OFF Track 1m White ON/OFF Track 2m Black ON/OFF Track 2m White	UP1459429-1 UP1459102-1 UP1459429 UP1459102
	Track DALI Susp./Surf. DALI Track 1m Black DALI Track 1m White DALI Track 2m Black DALI Track 2m White	UP1459439-1 UP1459107-1 UP1459439 UP1459107
	Recess. Track ON/OFF ON/OFF Rec. Track 1m BL ON/OFF Rec. Track 1m WH ON/OFF Rec. Track 2m BL ON/OFF Rec. Track 2m WH	UP1459312-1 UP1459112-1 UP1459312 UP1459112
	Recessed Track DALI DALI Rec. Track 1m BL DALI Rec. Track 1m WH DALI Rec. Track 2m BL DALI Rec. Track 2m WH	UP1459317-1 UP1459117-1 UP1459317 UP1459117