

DESCRIPTION

Technical lighting is increasingly considered in the planning of spaces and their purpose because every location has its own specific lighting requirements.

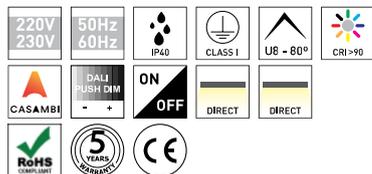
Therefore, we would like to introduce you to the ORIS 50mm on Track for a universal 230V track application, which promises to innovate and complement technical lighting solutions.

MOUNTING TYPE	Uni Track
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Anodized aluminium, Textured Black, Textured White
CONTROL	CASAMBI, DALI / Switch Dim, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 169 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

ICONOGRAPHY

**ORIS 50 PRISMATIC 230V
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
850	16.5	AL, TB, TW	CS, DA, NF	80	2690	2152	3000K	5225XX.08P8.930.FI
850	16.5	AL, TB, TW	CS, DA, NF	80	2789	2231	4000K	5225XX.08P8.940.FI
1130	22	AL, TB, TW	CS, DA, NF	80	3586	2869	3000K	5225XX.11P8.930.FI
1130	22	AL, TB, TW	CS, DA, NF	80	3718	2974	4000K	5225XX.11P8.940.FI
1410	27.5	AL, TB, TW	CS, DA, NF	80	4483	3586	3000K	5225XX.14P8.930.FI
1410	27.5	AL, TB, TW	CS, DA, NF	80	4648	3718	4000K	5225XX.14P8.940.FI

**SELECT YOUR PREFERRED
OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Anodized aluminium	AL	80°	80
DALI / Switch Dim	DA	Textured Black	TB		
ON/OFF	NF	Textured White	TW		

ACCESSORIES

	Track ON/OFF Susp./Surf. ON/OFF Track 1m Black ON/OFF Track 1m White ON/OFF Track 2m Black ON/OFF Track 2m White	UP1459429-1 UP1459102-1 UP1459429 UP1459102
--	--	--

	Track DALI Susp./Surf. DALI Track 1m Black DALI Track 1m White DALI Track 2m Black DALI Track 2m White	UP1459439-1 UP1459107-1 UP1459439 UP1459107
--	--	--

	Recess. Track ON/OFF ON/OFF Rec. Track 1m BL ON/OFF Rec. Track 1m WH ON/OFF Rec. Track 2m BL ON/OFF Rec. Track 2m WH	UP1459312-1 UP1459112-1 UP1459312 UP1459112
--	--	--

	Recessed Track DALI DALI Rec. Track 1m BL DALI Rec. Track 1m WH DALI Rec. Track 2m BL DALI Rec. Track 2m WH	UP1459317-1 UP1459117-1 UP1459317 UP1459117
--	---	--