

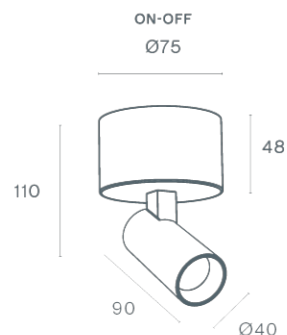
**DESCRIPTION**

The APALIS is a compact track light, measuring just 40 mm in diameter and 90 mm in length, designed to deliver focused and discreet lighting. With its elegant and minimalist design, it easily adapts to various environments and applications. It can be installed on the ceiling, wall or 48V low-voltage track systems (Micro and EVO).

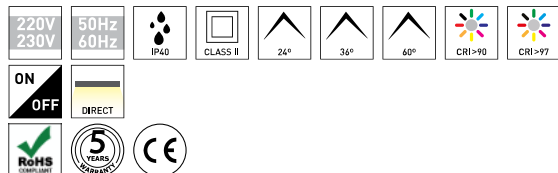
Its versatility makes it ideal for highlighting objects, artworks, or specific areas with high precision. The 48V EVO track also includes the APALIS DOUBLE model, which integrates two spotlights into a single driver, offering a more compact and efficient solution.

Due to driver specifications, this version is available exclusively with DALI control.

<b>MOUNTING</b>	Surface
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	ON/OFF


**TECHNICAL DRAWING**

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 153 lm/W
<b>CRI</b>	CRI→90, CRI→97
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**ICONOGRAPHY**

**APALIS SURFACE SPOTLIGHT**  
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	6	TB, TW	NF	24, 36, 60	821	698	2700K	5447XX.24.927.FI
90	6	TB, TW	NF	24, 36, 60	821	698	2700K	5447XX.36.927.FI
90	6	TB, TW	NF	24, 36, 60	821	698	2700K	5447XX.60.927.FI
90	6	TB, TW	NF	24, 36, 60	857	728	3000K	5447XX.24.930.FI
90	6	TB, TW	NF	24, 36, 60	857	728	3000K	5447XX.36.930.FI
90	6	TB, TW	NF	24, 36, 60	857	728	3000K	5447XX.60.930.FI
90	6	TB, TW	NF	24, 36, 60	910	774	4000K	5447XX.24.940.FI
90	6	TB, TW	NF	24, 36, 60	910	774	4000K	5447XX.36.940.FI
90	6	TB, TW	NF	24, 36, 60	910	774	4000K	5447XX.60.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
ON/OFF	NF	Textured Black	TB	24°	24
		Textured White	TW	36°	36
				60°	60

**APALIS SURFACE SPOTLIGHT**  
 PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	6	TB, TW	NF	24, 36, 60	658	560	2700K	115XX.24.9727.FI
90	6	TB, TW	NF	24, 36, 60	658	560	2700K	115XX.36.9727.FI
90	6	TB, TW	NF	24, 36, 60	658	560	2700K	115XX.60.9727.FI
90	6	TB, TW	NF	24, 36, 60	706	600	3000K	115XX.24.9730.FI
90	6	TB, TW	NF	24, 36, 60	706	600	3000K	115XX.36.9730.FI
90	6	TB, TW	NF	24, 36, 60	706	600	3000K	115XX.60.9730.FI
90	6	TB, TW	NF	24, 36, 60	742	631	4000K	115XX.24.9740.FI
90	6	TB, TW	NF	24, 36, 60	742	631	4000K	115XX.36.9740.FI
90	6	TB, TW	NF	24, 36, 60	742	631	4000K	115XX.60.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
ON/OFF	NF	Textured Black	TB	24°	24
		Textured White	TW	36°	36
				60°	60

