


**DESCRIPTION**

The APALIS is a compact track light, measuring just 40 mm in diameter and 90 mm in length, designed to deliver focused and discreet lighting. With its elegant and minimalist design, it easily adapts to various environments and applications. It can be installed on the ceiling, wall or 48V low-voltage track systems (Micro and EVO).

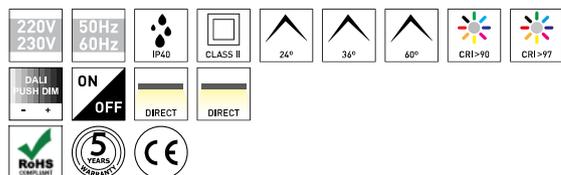
Its versatility makes it ideal for highlighting objects, artworks, or specific areas with high precision. The 48V EVO track also includes the APALIS DOUBLE model, which integrates two spotlights into a single driver, offering a more compact and efficient solution.

Due to driver specifications, this version is available exclusively with DALI control.

<b>MOUNTING TYPE</b>	Surface
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	DALI / Switch Dim, ON/OFF


**TECHNICAL DRAWING**

**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 153 lm/W
<b>CRI</b>	CRI→90, CRI→97
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**ICONOGRAPHY**

**APALIS RECESSED SPOTLIGHT**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	6	TB, TW	DA, NF	24, 36, 60	821	698	2700K	5443XX.24.927.FI
90	6	TB, TW	DA, NF	24, 36, 60	821	698	2700K	5443XX.36.927.FI
90	6	TB, TW	DA, NF	24, 36, 60	821	698	2700K	5443XX.60.927.FI
90	6	TB, TW	DA, NF	24, 36, 60	857	728	3000K	5443XX.24.930.FI
90	6	TB, TW	DA, NF	24, 36, 60	857	728	3000K	5443XX.36.930.FI
90	6	TB, TW	DA, NF	24, 36, 60	857	728	3000K	5443XX.60.930.FI
90	6	TB, TW	DA, NF	24, 36, 60	910	774	4000K	5443XX.24.940.FI
90	6	TB, TW	DA, NF	24, 36, 60	910	774	4000K	5443XX.36.940.FI
90	6	TB, TW	DA, NF	24, 36, 60	910	774	4000K	5443XX.60.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI / Switch Dim	DA	Textured Black	TB	24°	24
ON/OFF	NF	Textured White	TW	36°	36
				60°	60

**APALIS RECESSED SPOTLIGHT**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	6	TB, TW	DA, NF	24, 36, 60	658	560	2700K	5449XX.24.9727.FI
90	6	TB, TW	DA, NF	24, 36, 60	658	560	2700K	5449XX.36.9727.FI
90	6	TB, TW	DA, NF	24, 36, 60	658	560	2700K	5449XX.60.9727.FI
90	6	TB, TW	DA, NF	24, 36, 60	706	600	3000K	5449XX.24.9730.FI
90	6	TB, TW	DA, NF	24, 36, 60	706	600	3000K	5449XX.36.9730.FI
90	6	TB, TW	DA, NF	24, 36, 60	706	600	3000K	5449XX.60.9730.FI
90	6	TB, TW	DA, NF	24, 36, 60	742	631	4000K	5449XX.24.9740.FI
90	6	TB, TW	DA, NF	24, 36, 60	742	631	4000K	5449XX.36.9740.FI
90	6	TB, TW	DA, NF	24, 36, 60	742	631	4000K	5449XX.60.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI / Switch Dim	DA	Textured Black	TB	24°	24
ON/OFF	NF	Textured White	TW	36°	36
				60°	60

