

**DESCRIPTION**

APALIS is Brilumen's smallest-sized track light with just 40mm in diameter and 90mm body length. When combined with several pieces, the APALIS allows a focused and high lighting level. APALIS is available in textured black or white finishing, and in two versions, one for magnetic rails and the other one with recessed accessory. In both versions, the ON/OFF option and the option with DALI regulation are available.


MOUNTING	CALHAS
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI, ON/OFF




**LED FEATURES**

LUMINOUS EFFICIENCY	UP TO 153 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

**TECHNICAL DRAWING**

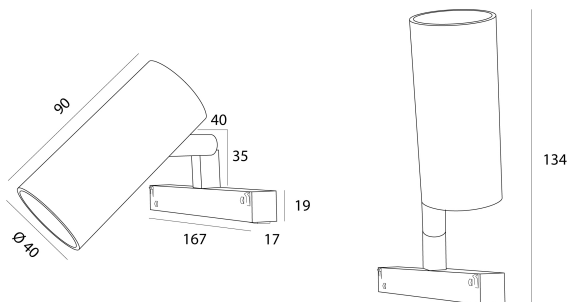

**ICONOGRAPHY**

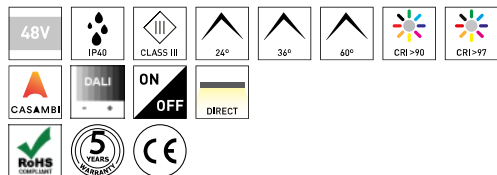

**APALIS D/I 48V EVO**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	6	TB, TW	CS, DL, NF	24, 36, 60	821	698	2700K	5415XX.24.927.FI
90	6	TB, TW	CS, DL, NF	24, 36, 60	821	698	2700K	5415XX.36.927.FI
90	6	TB, TW	CS, DL, NF	24, 36, 60	821	698	2700K	5415XX.60.927.FI
90	6	TB, TW	CS, DL, NF	24, 36, 60	857	728	3000K	5415XX.24.930.FI
90	6	TB, TW	CS, DL, NF	24, 36, 60	857	728	3000K	5415XX.36.930.FI
90	6	TB, TW	CS, DL, NF	24, 36, 60	857	728	3000K	5415XX.60.930.FI
90	6	TB, TW	CS, DL, NF	24, 36, 60	910	774	4000K	5415XX.24.940.FI
90	6	TB, TW	CS, DL, NF	24, 36, 60	910	774	4000K	5415XX.36.940.FI
90	6	TB, TW	CS, DL, NF	24, 36, 60	910	774	4000K	5415XX.60.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	24°	24
DALI	DL	Textured White	TW	36°	36
ON/OFF	NF			60°	60

**APALIS D/I 48V EVO**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	6	TB, TW	CS, DL, NF	24, 36, 60	658	560	2700K	5416XX.24.9727.FI
90	6	TB, TW	CS, DL, NF	24, 36, 60	658	560	2700K	5416XX.36.9727.FI
90	6	TB, TW	CS, DL, NF	24, 36, 60	658	560	2700K	5416XX.60.9727.FI
90	6	TB, TW	CS, DL, NF	24, 36, 60	706	600	3000K	5416XX.24.9730.FI
90	6	TB, TW	CS, DL, NF	24, 36, 60	706	600	3000K	5416XX.36.9730.FI
90	6	TB, TW	CS, DL, NF	24, 36, 60	706	600	3000K	5416XX.60.9730.FI
90	6	TB, TW	CS, DL, NF	24, 36, 60	742	631	4000K	5416XX.24.9740.FI
90	6	TB, TW	CS, DL, NF	24, 36, 60	742	631	4000K	5416XX.36.9740.FI
90	6	TB, TW	CS, DL, NF	24, 36, 60	742	631	4000K	5416XX.60.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	24°	24
DALI	DL	Textured White	TW	36°	36
ON/OFF	NF			60°	60

**ACCESSORIES**



TK9E - Track 48V EVO  
Track 48V EVO 1M  
Track 48V EVO 2M

White	Black
3080-0211E.WH	3080-0211E.BL
3080-0212E.WH	3080-0212E.BL