

DESCRIPTION

APALIS is Brilumen's smallest-sized track light with just 40mm in diameter and 90mm body length. When combined with several pieces, the APALIS allows a focused and high lighting level. APALIS is available in textured black or white finishing, and in two versions, one for magnetic rails and the other one with recessed accessory. In both versions, the ON/OFF option and the option with DALI regulation are available.


| | |
|--------------------|--------------------------------|
| MOUNTING | CALHAS |
| LIGHT DISTRIBUTION | Direct |
| POWER SUPPLY | 48V / TRACK |
| WARRANTY | 5 Years |
| FINISHING | Textured Black, Textured White |
| CONTROL | CASAMBI, DALI, ON/OFF |




LED FEATURES

| | |
|----------------------|-----------------|
| LUMINOUS EFFICIENCY | UP TO 153 lm/W |
| CRI | CRI→90, CRI→97 |
| LIFESPAN | 50.000 Hours |
| STEPS MACADAM | 3 Steps MacAdam |
| LUMEN MAINTENANCE | L90/B50 |
| PHOTOBIOLOGICAL RISK | RG1 |

TECHNICAL DRAWING

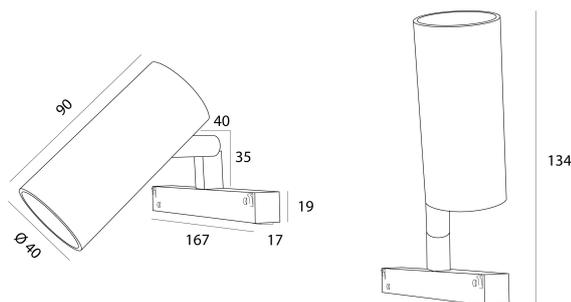

ICONOGRAPHY

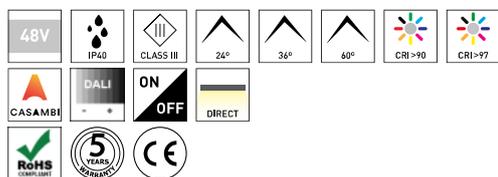

APALIS D/I 48V EVO
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

| LENGTH | POWER | FINISHING | CONTROLTYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE |
|--------|-------|-----------|-------------|------------|------------|--------------|-------------|------------------|
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 821 | 698 | 2700K | 5415XX.24.927.FI |
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 821 | 698 | 2700K | 5415XX.36.927.FI |
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 821 | 698 | 2700K | 5415XX.60.927.FI |
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 857 | 728 | 3000K | 5415XX.24.930.FI |
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 857 | 728 | 3000K | 5415XX.36.930.FI |
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 857 | 728 | 3000K | 5415XX.60.930.FI |
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 910 | 774 | 4000K | 5415XX.24.940.FI |
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 910 | 774 | 4000K | 5415XX.36.940.FI |
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 910 | 774 | 4000K | 5415XX.60.940.FI |

SELECT YOUR PREFERRED OPTION

| CONTROLTYPE | XX | FINISHING | FI | BEAM ANGLE | BA |
|-------------|----|----------------|----|------------|----|
| CASAMBI | CS | Textured Black | TB | 24° | 24 |
| DALI | DL | Textured White | TW | 36° | 36 |
| ON/OFF | NF | | | 60° | 60 |

APALIS D/I 48V EVO
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

| LENGTH | POWER | FINISHING | CONTROLTYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE |
|--------|-------|-----------|-------------|------------|------------|--------------|-------------|-------------------|
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 658 | 560 | 2700K | 5416XX.24.9727.FI |
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 658 | 560 | 2700K | 5416XX.36.9727.FI |
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 658 | 560 | 2700K | 5416XX.60.9727.FI |
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 706 | 600 | 3000K | 5416XX.24.9730.FI |
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 706 | 600 | 3000K | 5416XX.36.9730.FI |
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 706 | 600 | 3000K | 5416XX.60.9730.FI |
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 742 | 631 | 4000K | 5416XX.24.9740.FI |
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 742 | 631 | 4000K | 5416XX.36.9740.FI |
| 90 | 6 | TB, TW | CS, DL, NF | 24, 36, 60 | 742 | 631 | 4000K | 5416XX.60.9740.FI |

SELECT YOUR PREFERRED OPTION

| CONTROLTYPE | XX | FINISHING | FI | BEAM ANGLE | BA |
|-------------|----|----------------|----|------------|----|
| CASAMBI | CS | Textured Black | TB | 24° | 24 |
| DALI | DL | Textured White | TW | 36° | 36 |
| ON/OFF | NF | | | 60° | 60 |

ACCESSORIES



TK9E - Track 48V EVO
Track 48V EVO 1M
Track 48V EVO 2M

| White | Black |
|---------------|---------------|
| 3080-0211E.WH | 3080-0211E.BL |
| 3080-0212E.WH | 3080-0212E.BL |