

DESCRIPTION


APALIS is Brilumen's smallest-sized track light with just 40mm in diameter and 90mm body length. When combined with several pieces, the APALIS allows a focused and high lighting level. APALIS is available in textured black or white finishing, and in two versions, one for magnetic rails and the other one with recessed accessory. In both versions, the ON/OFF option and the option with DALI regulation are available.

MOUNTING TYPE	Magnetic, Magnetico
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI, ON/OFF

LED FEATURES

LUMINOUS EFFICIENCY	UP TO 146 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

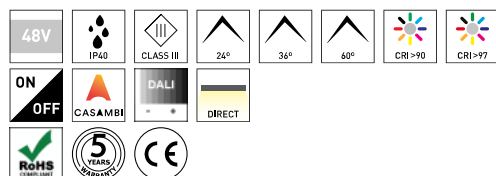

APALIS MAGNETIC D/I 48V PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1047	890	2700K	415XX.24.927.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1047	890	2700K	415XX.36.927.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1047	890	2700K	415XX.60.927.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1090	927	3000K	415XX.24.930.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1090	927	3000K	415XX.36.930.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1090	927	3000K	415XX.60.930.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1107	941	4000K	415XX.24.940.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1107	941	4000K	415XX.36.940.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1107	941	4000K	415XX.60.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	24°	24
DALI	DL	Textured White	TW	36°	36
ON/OFF	NF			60°	60



APALIS MAGNETIC D/I 48V PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	937	797	2700K	416XX.24.9727.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	937	797	2700K	416XX.36.9727.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	937	797	2700K	416XX.60.9727.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	975	829	3000K	416XX.24.9730.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	975	829	3000K	416XX.36.9730.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	975	829	3000K	416XX.60.9730.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1000	850	4000K	416XX.24.9740.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1000	850	4000K	416XX.36.9740.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1000	850	4000K	416XX.60.9740.FI


SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	24°	24
DALI	DL	Textured White	TW	36°	36
ON/OFF	NF			60°	60

ACCESSORIES



TECHNICAL DRAWING

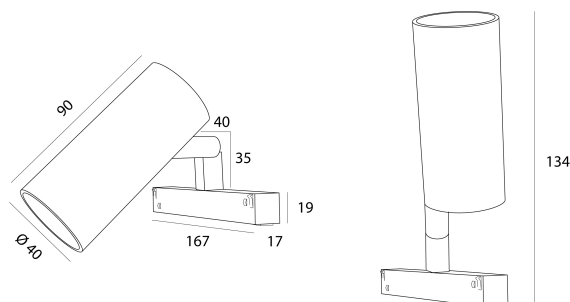



TK9 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0211.WH	3080-0211.BL
Magnetic Track 48V 2M	3080-0212.WH	3080-0212.BL