

DESCRIPTION

The APALIS is a compact track light, measuring just 40 mm in diameter and 90 mm in length, designed to deliver focused and discreet lighting. With its elegant and minimalist design, it easily adapts to various environments and applications. It can be installed on the ceiling, wall or 48V low-voltage track systems (Micro and EVO). Its versatility makes it ideal for highlighting objects, artworks, or specific areas with high precision. The 48V EVO track also includes the APALIS DOUBLE model, which integrates two spotlights into a single driver, offering a more compact and efficient solution. Due to driver specifications, this version is available exclusively with DALI control.


MOUNTING TYPE	CALHAS
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI, ON/OFF




LED FEATURES

LUMINOUS EFFICIENCY	UP TO 153 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

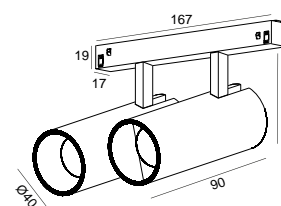

ICONOGRAPHY

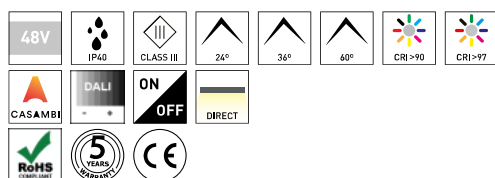

APALIS DOUBLE 48V EVO  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	12	TB, TW	CS, DL, NF	24, 36, 60	1642	1396	2700K	5410XX.24.927.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1642	1396	2700K	5410XX.36.927.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1642	1396	2700K	5410XX.60.927.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1642	1396	2700K	5472XX.24.927.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1642	1396	2700K	5472XX.36.927.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1642	1396	2700K	5472XX.60.927.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1714	1457	3000K	5410XX.24.930.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1714	1457	3000K	5410XX.36.930.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1714	1457	3000K	5410XX.60.930.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1714	1457	3000K	5472XX.24.930.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1714	1457	3000K	5472XX.36.930.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1714	1457	3000K	5472XX.60.930.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1821	1548	4000K	5410XX.24.940.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1821	1548	4000K	5410XX.36.940.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1821	1548	4000K	5410XX.60.940.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1821	1548	4000K	5472XX.24.940.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1821	1548	4000K	5472XX.36.940.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1821	1548	4000K	5472XX.60.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	24°	24
DALI	DL	Textured White	TW	36°	36
ON/OFF	NF			60°	60


**APALIS DOUBLE 48V EVO**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI>97**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	12	TB, TW	CS, DL, NF	24, 36, 60	1317	1119	2700K	5473XX.24.9727.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1317	1119	2700K	5473XX.36.9727.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1317	1119	2700K	5473XX.60.9727.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1317	1119	2700K	5479XX.24.9727.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1317	1119	2700K	5479XX.36.9727.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1317	1119	2700K	5479XX.60.9727.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1412	1201	3000K	5473XX.24.9730.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1412	1201	3000K	5473XX.36.9730.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1412	1201	3000K	5473XX.60.9730.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1412	1201	3000K	5479XX.24.9730.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1412	1201	3000K	5479XX.36.9730.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1412	1201	3000K	5479XX.60.9730.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1484	1262	4000K	5473XX.24.9740.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1484	1262	4000K	5473XX.36.9740.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1484	1262	4000K	5473XX.60.9740.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1484	1262	4000K	5479XX.24.9740.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1484	1262	4000K	5479XX.36.9740.FI
90	12	TB, TW	CS, DL, NF	24, 36, 60	1484	1262	4000K	5479XX.60.9740.FI

**SELECT YOUR PREFERRED OPTION**

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	24°	24
DALI	DL	Textured White	TW	36°	36
ON/OFF	NF			60°	60

**ACCESSORIES**

	<b>BT15E - Track 48V EVO</b> Track 48V EVO 1M Track 48V EVO 2M	White 3080-0227E.WH 3080-0228E.WH	Black 3080-0227E.BL 3080-0228E.BL
	<b>BT1E - Track 48V EVO</b> Track 48V EVO 1M Track 48V EVO 2M	White 3080-0175E.WH 3080-0176E.WH	Black 3080-0175E.BL 3080-0176E.BL
	<b>BT2E - Track 48V EVO</b> Track 48V EVO 1M Track 48V EVO 2M	White 3080-0177E.WH 3080-0178E.WH	Black 3080-0177E.BL 3080-0178E.BL
	<b>TK18E - Track 48V EVO</b> Track 48V EVO 1M Track 48V EVO 2M	White 3080-0231E.WH 3080-0232E.WH	Black 3080-0231E.BL 3080-0232E.BL
	<b>TK5E - Track 48V EVO</b> Track 48V EVO 1M Track 48V EVO 2M	White 3080-0250E.WH 3080-0251E.WH	Black 3080-0250E.BL 3080-0251E.BL
	<b>TK9E - Track 48V EVO</b> Track 48V EVO 1M Track 48V EVO 2M	White 3080-0211E.WH 3080-0212E.WH	Black 3080-0211E.BL 3080-0212E.BL