


DESCRIPTION


APALIS DOUBLE is Brilumen's smallest sized track light with just 40mm in diameter and 90mm body length. When combined with several pieces, the APALIS allows a focused and high lighting level. APALIS DOUBLE brings together 2 APALIS in the same driver, allowing on the one hand to reduce the space between the track lights thus changing the aesthetics, and on the other hand to reduce the total cost of the solution. APALIS DOUBLE is available in textured black or white finishing, and is only available to be used with magnetic rails. Due to the driver specificity, only DALI regulation is available in this product.

Note: The Apalis Double with the code 472/473 is compatible with BT1/TK3 rails (Short Holder) while the Apalis Double with the code 410/479 is compatible with BT2/TK5/TK9 rails (Long Holder).

MOUNTING TYPE	Magnetic
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	ON/OFF, DALI


TECHNICAL DRAWING

LED FEATURES

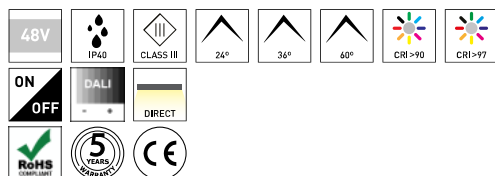LUMINOUS EFFICIENCY	UP TO 146 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

APALIS DOUBLE MAGNETIC
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	15.4	TB, TW	DL, NF	24, 36, 60	2094	1780	2700K	410XX.24.927.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2094	1780	2700K	410XX.36.927.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2094	1780	2700K	410XX.60.927.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2094	1780	2700K	472XX.24.927.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2094	1780	2700K	472XX.36.927.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2094	1780	2700K	472XX.60.927.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2180	1853	3000K	410XX.24.930.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2180	1853	3000K	410XX.36.930.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2180	1853	3000K	410XX.60.930.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2180	1853	3000K	472XX.24.930.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2180	1853	3000K	472XX.36.930.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2180	1853	3000K	472XX.60.930.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2214	1882	4000K	410XX.24.940.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2214	1882	4000K	410XX.36.940.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2214	1882	4000K	410XX.60.940.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2214	1882	4000K	472XX.24.940.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2214	1882	4000K	472XX.36.940.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2214	1882	4000K	472XX.60.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI	DL	Textured Black	TB	24°	24
ON/OFF	NF	Textured White	TW	36°	36
				60°	60


**APALIS DOUBLE MAGNETIC
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	15.4	TB, TW	DL, NF	24, 36, 60	1874	1593	2700K	473XX.24.9727.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	1874	1593	2700K	473XX.36.9727.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	1874	1593	2700K	473XX.60.9727.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	1874	1593	2700K	479XX.24.9727.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	1874	1593	2700K	479XX.36.9727.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	1874	1593	2700K	479XX.60.9727.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	1950	1658	3000K	473XX.24.9730.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	1950	1658	3000K	473XX.36.9730.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	1950	1658	3000K	473XX.60.9730.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	1950	1658	3000K	479XX.24.9730.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	1950	1658	3000K	479XX.36.9730.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	1950	1658	3000K	479XX.60.9730.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2000	1700	4000K	473XX.24.9740.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2000	1700	4000K	473XX.36.9740.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2000	1700	4000K	473XX.60.9740.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2000	1700	4000K	479XX.24.9740.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2000	1700	4000K	479XX.36.9740.FI
90	15.4	TB, TW	DL, NF	24, 36, 60	2000	1700	4000K	479XX.60.9740.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI	DL	Textured Black	TB	24°	24
ON/OFF	NF	Textured White	TW	36°	36
				60°	60

ACCESSORIES

BT1 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0175.WH	3080-0175.BL
Magnetic Track 48V 2M	3080-0176.WH	3080-0176.BL

BT2 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0177.WH	3080-0177.BL
Magnetic Track 48V 2M	3080-0178.WH	3080-0178.BL

TK3 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0205.WH	3080-0205.BL
Magnetic Track 48V 2M	3080-0206.WH	3080-0206.BL

TK5 48V Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0250.WH	3080-0250.BL
Magnetic Track 48V 2M	3080-0251.WH	3080-0251.BL

TK9 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0211.WH	3080-0211.BL
Magnetic Track 48V 2M	3080-0212.WH	3080-0212.BL