

DESCRIPTION


APALIS is Brilumen's smallest-sized track light with just 40mm in diameter and 90mm body length. When combined with several pieces, the APALIS allows a focused and high lighting level. APALIS is available in textured black or white finishing, and in two versions, one for magnetic rails and the other one with recessed accessory. In both versions, the ON/OFF option and the option with DALI regulation are available.

Note: The Apalis with the code 400/471 is compatible with BT1/TK3 rails (Short Holder) while the Apalis with the code 409/478 is compatible with BT2/TK5/TK9 rails (Long Holder).

MOUNTING TYPE	Magnetic, Magnético
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, ON/OFF, DALI




TECHNICAL DRAWING



LED FEATURES

LUMINOUS EFFICIENCY	UP TO 146 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

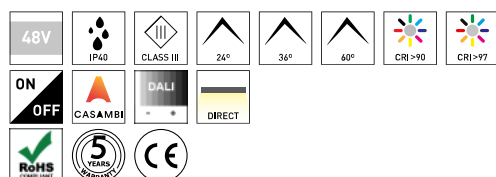

APALIS MAGNETIC 48V PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1047	890	2700K	400XX.24.927.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1047	890	2700K	400XX.36.927.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1047	890	2700K	400XX.60.927.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1047	890	2700K	409XX.24.927.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1047	890	2700K	409XX.36.927.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1047	890	2700K	409XX.60.927.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1090	927	3000K	400XX.24.930.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1090	927	3000K	400XX.36.930.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1090	927	3000K	400XX.60.930.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1090	927	3000K	409XX.24.930.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1090	927	3000K	409XX.36.930.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1090	927	3000K	409XX.60.930.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1107	941	4000K	400XX.24.940.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1107	941	4000K	400XX.36.940.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1107	941	4000K	400XX.60.940.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1107	941	4000K	409XX.24.940.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1107	941	4000K	409XX.36.940.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1107	941	4000K	409XX.60.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	24°	24
DALI	DL	Textured White	TW	36°	36
ON/OFF	NF			60°	60


APALIS MAGNETIC 48V
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	937	797	2700K	471XX.24.9727.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	937	797	2700K	471XX.36.9727.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	937	797	2700K	471XX.60.9727.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	937	797	2700K	478XX.24.9727.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	937	797	2700K	478XX.36.9727.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	937	797	2700K	478XX.60.9727.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	975	829	3000K	471XX.24.9730.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	975	829	3000K	471XX.36.9730.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	975	829	3000K	471XX.60.9730.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	975	829	3000K	478XX.24.9730.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	975	829	3000K	478XX.36.9730.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	975	829	3000K	478XX.60.9730.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1000	850	4000K	471XX.24.9740.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1000	850	4000K	471XX.36.9740.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1000	850	4000K	471XX.60.9740.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1000	850	4000K	478XX.24.9740.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1000	850	4000K	478XX.36.9740.FI
90	7.7	TB, TW	CS, DL, NF	24, 36, 60	1000	850	4000K	478XX.60.9740.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX
CASAMBI	CS
DALI	DL
ON/OFF	NF

FINISHING	FI
Textured Black	TB
Textured White	TW

BEAM ANGLE	BA
24°	24
36°	36
60°	60

ACCESSORIES


BT1 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0175.WH	3080-0175.BL
Magnetic Track 48V 2M	3080-0176.WH	3080-0176.BL



BT2 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0177.WH	3080-0177.BL
Magnetic Track 48V 2M	3080-0178.WH	3080-0178.BL



TK3 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0205.WH	3080-0205.BL
Magnetic Track 48V 2M	3080-0206.WH	3080-0206.BL



TK5 48V Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0250.WH	3080-0250.BL
Magnetic Track 48V 2M	3080-0251.WH	3080-0251.BL



TK9 Magnetic Track	White	Black
Magnetic Track 48V 1M	3080-0211.WH	3080-0211.BL
Magnetic Track 48V 2M	3080-0212.WH	3080-0212.BL