


DESCRIPTION

MOUNTING TYPE	Uni Track
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	DALI, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 153 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

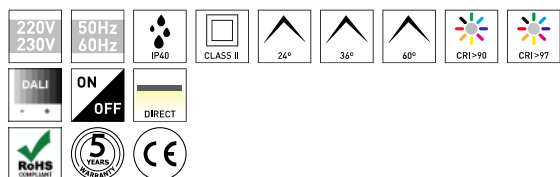

TECHNICAL DRAWING

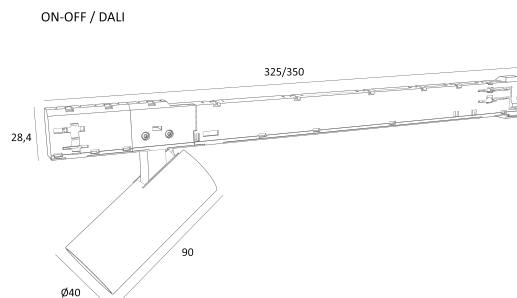

APALIS INVITRACK 230V
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	6	TB, TW	DL, NF	24, 36, 60	821	698	2700K	5421XX.24.927.FI
90	6	TB, TW	DL, NF	24, 36, 60	821	698	2700K	5421XX.36.927.FI
90	6	TB, TW	DL, NF	24, 36, 60	821	698	2700K	5421XX.60.927.FI
90	6	TB, TW	DL, NF	24, 36, 60	857	728	3000K	5421XX.24.930.FI
90	6	TB, TW	DL, NF	24, 36, 60	857	728	3000K	5421XX.36.930.FI
90	6	TB, TW	DL, NF	24, 36, 60	857	728	3000K	5421XX.60.930.FI
90	6	TB, TW	DL, NF	24, 36, 60	910	774	4000K	5421XX.24.940.FI
90	6	TB, TW	DL, NF	24, 36, 60	910	774	4000K	5421XX.36.940.FI
90	6	TB, TW	DL, NF	24, 36, 60	910	774	4000K	5421XX.60.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI	DL	Textured Black	TB	24°	24
ON/OFF	NF	Textured White	TW	36°	36
				60°	60


**APALIS INVITRACK 230V
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97**

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	6	TB, TW	DL, NF	24, 36, 60	658	560	2700K	5425XX.24.9727.FI
90	6	TB, TW	DL, NF	24, 36, 60	658	560	2700K	5425XX.36.9727.FI
90	6	TB, TW	DL, NF	24, 36, 60	658	560	2700K	5425XX.60.9727.FI
90	6	TB, TW	DL, NF	24, 36, 60	706	600	3000K	5425XX.24.9730.FI
90	6	TB, TW	DL, NF	24, 36, 60	706	600	3000K	5425XX.36.9730.FI
90	6	TB, TW	DL, NF	24, 36, 60	706	600	3000K	5425XX.60.9730.FI
90	6	TB, TW	DL, NF	24, 36, 60	742	631	4000K	5425XX.24.9740.FI
90	6	TB, TW	DL, NF	24, 36, 60	742	631	4000K	5425XX.36.9740.FI
90	6	TB, TW	DL, NF	24, 36, 60	742	631	4000K	5425XX.60.9740.FI

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI	DL	Textured Black	TB	24°	24
ON/OFF	NF	Textured White	TW	36°	36
				60°	60

ACCESSORIES

Track ON/OFF Susp./Surf.
 ON/OFF Track 1m White UP1459102-1
 ON/OFF Track 2m White UP1459102
 SEM DescAbr - UP1459429 UP1459429
 SEM DescAbr - UP1459429-1 UP1459429-1

Track DALI Susp./Surf.
 DALI Track 1m White UP1459107-1
 DALI Track 2m White UP1459107
 SEM DescAbr - UP1459439 UP1459439
 SEM DescAbr - UP1459439-1 UP1459439-1

Recess. Track ON/OFF
 ON/OFF Rec. Track 1m BL UP1459312-1
 ON/OFF Rec. Track 1m WH UP1459112-1
 ON/OFF Rec. Track 2m BL UP1459312
 ON/OFF Rec. Track 2m WH UP1459112

Recessed Track DALI
 DALI Rec. Track 1m BL UP1459317-1
 DALI Rec. Track 1m WH UP1459117-1
 DALI Rec. Track 2m BL UP1459317
 DALI Rec. Track 2m WH UP1459117