

DESCRIPTION

The APALIS is a compact track light, measuring just 40 mm in diameter and 90 mm in length, designed to deliver focused and discreet lighting. With its elegant and minimalist design, it easily adapts to various environments and applications. It can be installed on the ceiling, wall or 48V low-voltage track systems (Micro and EVO).

Its versatility makes it ideal for highlighting objects, artworks, or specific areas with high precision. The 48V EVO track also includes the APALIS DOUBLE model, which integrates two spotlights into a single driver, offering a more compact and efficient solution.

Due to driver specifications, this version is available exclusively with DALI control.




MOUNTING	Uni Track
LIGHT DISTRIBUTION	Direct
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	DALI, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 153 lm/W
CRI	CRI→90, CRI→97
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

ICONOGRAPHY

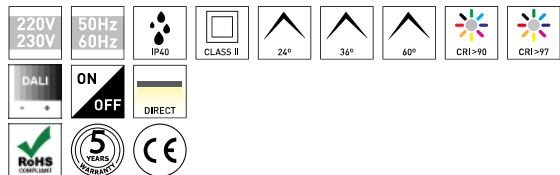

TECHNICAL DRAWING

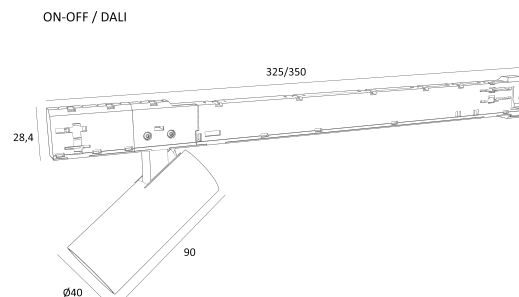

APALIS INVITRACK 230V  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	6	TB, TW	DL, NF	24, 36, 60	821	698	2700K	5421XX.24.927.FI
90	6	TB, TW	DL, NF	24, 36, 60	821	698	2700K	5421XX.36.927.FI
90	6	TB, TW	DL, NF	24, 36, 60	821	698	2700K	5421XX.60.927.FI
90	6	TB, TW	DL, NF	24, 36, 60	857	728	3000K	5421XX.24.930.FI
90	6	TB, TW	DL, NF	24, 36, 60	857	728	3000K	5421XX.36.930.FI
90	6	TB, TW	DL, NF	24, 36, 60	857	728	3000K	5421XX.60.930.FI
90	6	TB, TW	DL, NF	24, 36, 60	910	774	4000K	5421XX.24.940.FI
90	6	TB, TW	DL, NF	24, 36, 60	910	774	4000K	5421XX.36.940.FI
90	6	TB, TW	DL, NF	24, 36, 60	910	774	4000K	5421XX.60.940.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI	DL	Textured Black	TB	24°	24
ON/OFF	NF	Textured White	TW	36°	36
				60°	60

APALIS INVITRACK 230V  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→97

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
90	6	TB, TW	DL, NF	24, 36, 60	658	560	2700K	5425XX.24.9727.FI
90	6	TB, TW	DL, NF	24, 36, 60	658	560	2700K	5425XX.36.9727.FI
90	6	TB, TW	DL, NF	24, 36, 60	658	560	2700K	5425XX.60.9727.FI
90	6	TB, TW	DL, NF	24, 36, 60	706	600	3000K	5425XX.24.9730.FI
90	6	TB, TW	DL, NF	24, 36, 60	706	600	3000K	5425XX.36.9730.FI
90	6	TB, TW	DL, NF	24, 36, 60	706	600	3000K	5425XX.60.9730.FI
90	6	TB, TW	DL, NF	24, 36, 60	742	631	4000K	5425XX.24.9740.FI
90	6	TB, TW	DL, NF	24, 36, 60	742	631	4000K	5425XX.36.9740.FI
90	6	TB, TW	DL, NF	24, 36, 60	742	631	4000K	5425XX.60.9740.FI

SELECT YOUR PREFERRED OPTION

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI	DL	Textured Black	TB	24°	24
ON/OFF	NF	Textured White	TW	36°	36
				60°	60


ACCESSORIES



Track ON/OFF Susp./Surf.  
 ON/OFF Track 1m Black UP1459429-1  
 ON/OFF Track 1m White UP1459102-1  
 ON/OFF Track 2m Black UP1459429  
 ON/OFF Track 2m White UP1459102



Track DALI Susp./Surf.  
 DALI Track 1m Black UP1459439-1  
 DALI Track 1m White UP1459107-1  
 DALI Track 2m Black UP1459439  
 DALI Track 2m White UP1459107



Recess. Track ON/OFF  
 ON/OFF Rec. Track 1m BL UP1459312-1  
 ON/OFF Rec. Track 1m WH UP1459112-1  
 ON/OFF Rec. Track 2m BL UP1459312  
 ON/OFF Rec. Track 2m WH UP1459112



Recessed Track DALI  
 DALI Rec. Track 1m BL UP1459317-1  
 DALI Rec. Track 1m WH UP1459117-1  
 DALI Rec. Track 2m BL UP1459317  
 DALI Rec. Track 2m WH UP1459117