

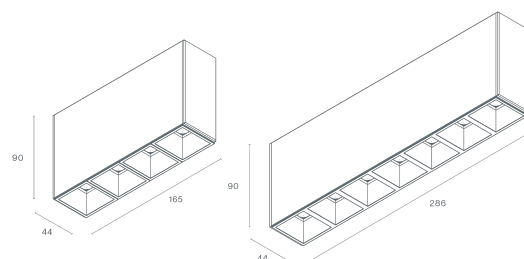
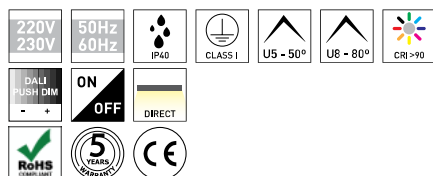
**DESCRIPTION**

BOB is a luminaire with clean lines, a discreet design, and a compact profile of just 44x90 mm. It is available as modules of 4 or 7 low glare lenses, ensuring precise light distribution and effective glare control, contributing to visual comfort and a clean aesthetic. Perfect for spaces where lighting must be efficient yet discreet, such as restaurants, collaborative work areas, or demanding architectural projects. BOB shares the same format and design language as the ORIS NEO linear range, allowing seamless integration within the same lighting layout.

<b>MOUNTING</b>	Surface
<b>LIGHT DISTRIBUTION</b>	Direct
<b>POWER SUPPLY</b>	220-230V / 50-60 Hz
<b>WARRANTY</b>	5 Years
<b>FINISHING</b>	Textured Black, Textured White
<b>CONTROL</b>	DALI / PUSH Dim, ON/OFF


**LED FEATURES**

<b>LUMINOUS EFFICIENCY</b>	UP TO 155 lm/W
<b>CRI</b>	CRI→90
<b>LIFESPAN</b>	50.000 Hours
<b>STEPS MACADAM</b>	3 Steps MacAdam
<b>LUMEN MAINTENANCE</b>	L90/B50
<b>PHOTOBIOLOGICAL RISK</b>	RG1

**TECHNICAL DRAWING**

**ICONOGRAPHY**

**BOB SURFACE SPOTLIGHT**  
**PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90**

LENGTH	POWER	FINISHING	CONTROLTYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
165	4,4	TB, TW	DA, NF	50, 80	635	603	3000K	580XX.0150.930.FI
165	4,4	TB, TW	DA, NF	50, 80	635	603	3000K	580XX.0180.930.FI
165	4,4	TB, TW	DA, NF	50, 80	670	637	4000K	580XX.0150.940.FI
165	4,4	TB, TW	DA, NF	50, 80	670	637	4000K	580XX.0180.940.FI
286	7,8	TB, TW	DA, NF	50, 80	1125	1125	3000K	580XX.0250.930.FI
286	7,8	TB, TW	DA, NF	50, 80	1125	1125	3000K	580XX.0280.930.FI
286	7,8	TB, TW	DA, NF	50, 80	1203	1203	4000K	580XX.0250.940.FI
286	7,8	TB, TW	DA, NF	50, 80	1203	1203	4000K	580XX.0280.940.FI

**SELECT YOUR PREFERRED OPTION**

CONTROLTYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI / PUSH Dim	DA	Textured Black	TB	50°	50
ON/OFF	NF	Textured White	TW	80°	80