


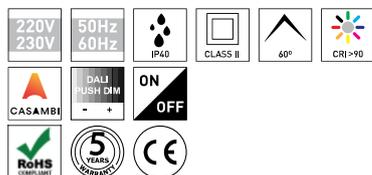
DESCRIPTION

Bonnard is a new cylindrical fixture made in high-quality aluminum and textured white finishing, with a silver-grey reflector. With reduced dimensions and only 10cm high, a CRI→90 and a 60° beam angle. It is available in a ceiling surface mounting, and in 2700K, 3000K and 4000K colour temperatures. This discreet but efficient lighting fixture guarantees a good result in any project.

MOUNTING TYPE	Surface
LIGHT DISTRIBUTION	Directa
POWER SUPPLY	220-230V / 50-60 Hz
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	CASAMBI, DALI / Switch Dim, ON/OFF


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 139 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

ICONOGRAPHY

BONNARD SURFACE SPOTLIGHT
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
100	16.6	TB, TW	CS, DA, NF	60	2052	1744	2700K	5393XX.BA.927.FI
100	16.6	TB, TW	CS, DA, NF	60	2185	1857	3000K	5393XX.BA.930.FI
100	16.6	TB, TW	CS, DA, NF	60	2300	1955	4000K	5393XX.BA.940.FI

SELECT YOUR PREFERRED OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
CASAMBI	CS	Textured Black	TB	60°	60
DALI / Switch Dim	DA	Textured White	TW		
ON/OFF	NF				