


DESCRIPTION

COLI - Intensity and subtlety in a single gesture. With a compact cylindrical shape and discreet presence, the COLI micro projector combines functionality and precision in a body that almost disappears into the space. Compatible with 48V MICRO and EVO track systems, it is a piece designed for specific and focused interventions, where light should take centre stage without visual noise. The adjustable orientation allows the lighting to be precisely shaped, highlighting elements with controlled intensity. Ideal for environments that require restrained lighting design, whether in exhibitions, shop windows or aesthetically curated residential interiors. More than just a point of light, it is a tool for spatial composition.


LIGHT DISTRIBUTION	Direct
POWER SUPPLY	48V / TRACK
WARRANTY	5 Years
FINISHING	Textured Black, Textured White
CONTROL	DALI

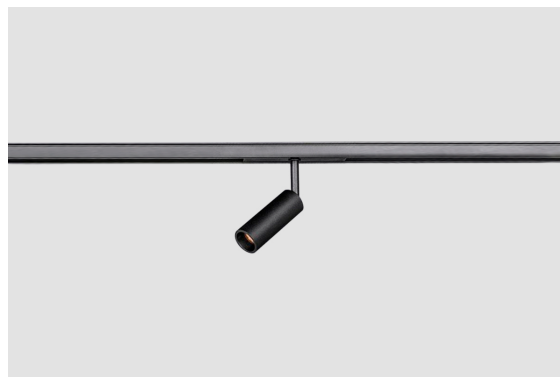


LED FEATURES

LUMINOUS EFFICIENCY	UP TO 121 lm/W
CRI	CRI→90
LIFESPAN	50.000 Hours
STEPS MACADAM	3 Steps MacAdam
LUMEN MAINTENANCE	L90/B50
PHOTOBIOLOGICAL RISK	RG1

TECHNICAL DRAWING

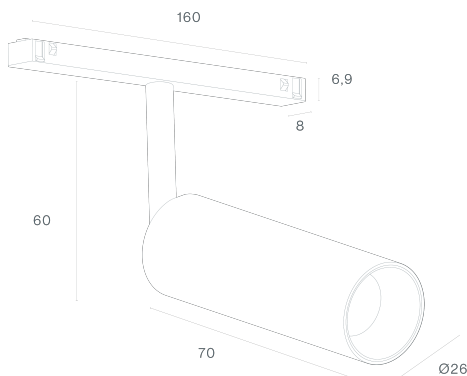

ICONOGRAPHY

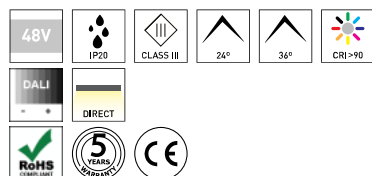

COLI 48V MICRO  
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→90

LENGTH	POWER	FINISHING	CONTROL TYPE	BEAM ANGLE	LED LUMENS	LUMINAIRE LM	COLOR TEMP.	CODE
70	4.4	TB, TW	DL	15, 24, 36	480	408	2700K	550XX.15.927.FI
70	4.4	TB, TW	DL	15, 24, 36	480	408	2700K	550XX.24.927.FI
70	4.4	TB, TW	DL	15, 24, 36	480	408	2700K	550XX.36.927.FI
70	4.4	TB, TW	DL	15, 24, 36	502	426	3000K	550XX.15.930.FI
70	4.4	TB, TW	DL	15, 24, 36	502	426	3000K	550XX.24.930.FI
70	4.4	TB, TW	DL	15, 24, 36	502	426	3000K	550XX.36.930.FI
70	4.4	TB, TW	DL	15, 24, 36	532	453	4000K	550XX.15.940.FI
70	4.4	TB, TW	DL	15, 24, 36	532	453	4000K	550XX.24.940.FI
70	4.4	TB, TW	DL	15, 24, 36	532	453	4000K	550XX.36.940.FI

SELECT YOUR PREFERRED  
OPTION

CONTROL TYPE	XX	FINISHING	FI	BEAM ANGLE	BA
DALI	DL	Textured Black	TB	24°	24
		Textured White	TW	36°	36