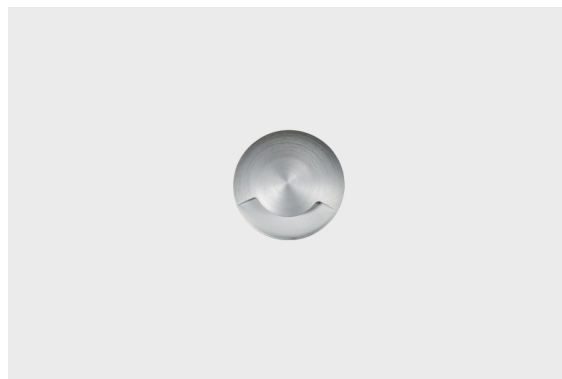



DESCRIPTION

The Outdoor Lighting range developed by Brilumen is essentially based on differentiated, high-quality products with high IP ratings, and the floor lighting is no exception. To perfectly conclude the outdoor lighting of your balcony or garden, the inground and decks light choice – Lunen, Orion & Bennet – with IP65, will bring harmony to these places. NOTE: Orion and Bennett have 3 Volts, requiring an external drive to connect the luminaires to 230 Volts, as well as a waterproof box to preserve the products' IP rating.

| | |
|------------------------|------------------|
| MOUNTING | Surface |
| DISTRIBUICAOLUZ | Directa |
| POWER SUPPLY | 230V / 50/60 Hz |
| WARRANTY | 2 Years |
| FINISHING | Brushed Aluminum |
| CONTROL | ON/OFF |


LED FEATURES

| | |
|-----------------------------|-----------------|
| LUMINOUS EFFICIENCY | UP TO 92 lm/W |
| CRI | CRI->85 |
| LIFESPAN | 50.000 Hours |
| STEPS MACADAM | 4 Steps MacAdam |
| LUMEN MAINTENANCE | L90/B50 |
| PHOTOBIOLOGICAL RISK | RG0 |

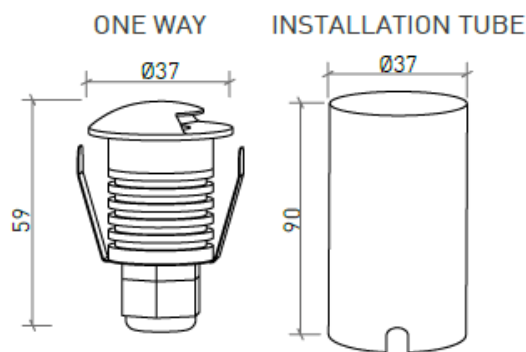TECHNICAL DRAWING

ICONOGRAPHY

BENNET ONE WAY 1W
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI->85

| LENGTH | POWER | FINISHING | CONTROLTYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE |
|--------|-------|-----------|-------------|------------|------------|--------------|-------------|-----------------|
| 37 | 1 | BAL | NF | 70°H/10°V | 92 | 26 | 3000K | 600.85.70.30.FI |
| 37 | 1 | BAL | NF | 70°H/10°V | 101 | 29 | 4000K | 600.85.70.40.FI |

SELECT YOUR PREFERRED OPTION

| | | | |
|--------------------|-----------|------------------|-----------|
| CONTROLTYPE | XX | FINISHING | FI |
| ON/OFF | NF | Brushed Aluminum | BAL |

ACCESSORIES

| | | | |
|--|--|---|-----------|
| | Waterproof box Waterproof box | - | 4080-1030 |
| | Output cable gland Output cable gland | - | 4080-1031 |
| | Cover for waterproof box Cover for waterproof box | - | 4080-1033 |
| | Driver (3-5 luminaires) Driver (3-5 luminaires) | - | 8015-0224 |
| | Driver (1-3 luminaires) Driver (1-3 luminaires) | - | 8015-0226 |

