

DESCRIPTION


The Outdoor Lighting range developed by Brilumen is essentially based on differentiated, high-quality products with high IP ratings, and the floor lighting is no exception. To perfectly conclude the outdoor lighting of your balcony or garden, the inground and decks light choice – Lunen, Orion & Bennet – with IP65, will bring harmony to these places. NOTE: Orion and Bennett have 3 Volts, requiring an external drive to connect the luminaires to 230 Volts, as well as a waterproof box to preserve the products' IP rating.

| | |
|--------------------|--------------------|
| MOUNTING TYPE | , Surface |
| LIGHT DISTRIBUTION | , Direct |
| POWER SUPPLY | 230V / 50/60 Hz |
| WARRANTY | , 2 Years |
| FINISHING | , Brushed Aluminum |
| CONTROL | , ON/OFF |

LED FEATURES

| | |
|----------------------|-------------------|
| LUMINOUS EFFICIENCY | UP TO 92 lm/W |
| CRI | , CRI→85 |
| LIFESPAN | , 50.000 Hours |
| STEPS MACADAM | , 4 Steps MacAdam |
| LUMEN MAINTENANCE | , L90/B50 |
| PHOTOBIOLOGICAL RISK | , RG0 |

ICONOGRAPHY



BENNET ONE WAY 1W PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI→85

| LENGTH | POWER | FINISHING | CONTROL TYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE |
|--------|-------|-----------|--------------|------------|------------|--------------|-------------|-----------------|
| 37 | 1 | BAL | NF | 70°H/10°V | 92 | 26 | 3000K | 600.85.70.30.FI |
| 37 | 1 | BAL | NF | 70°H/10°V | 101 | 29 | 4000K | 600.85.70.40.FI |

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE
ON/OFF XX
NF

FINISHING
Brushed Aluminum FI
BAL

ACCESSORIES



Waterproof box
Waterproof box 4080-1030



Output cable gland
Output cable gland 4080-1031




Cover for waterproof box
Cover for waterproof box 4080-1033



LED Driver 6W 350mA
LED Driver 6W 350mA 8015-0224



LED Driver 350mA
LED Driver 350mA 8015-0226

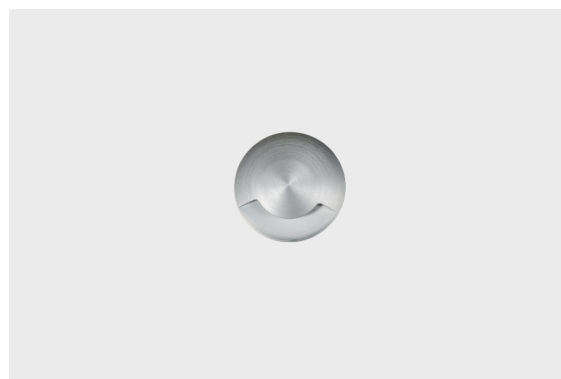

TECHNICAL DRAWING

