


DESCRIPTION

The Outdoor Lighting range developed by Brilumen is essentially based on differentiated, high-quality products with high IP ratings, and the floor lighting is no exception. To perfectly conclude the outdoor lighting of your balcony or garden, the inground and decks light choice – Lunen, Orion & Bennet – with IP65, will bring harmony to these places. NOTE: Orion and Bennett have 3 Volts, requiring an external drive to connect the luminaires to 230 Volts, as well as a waterproof box to preserve the products' IP rating.


| | |
|--------------------|------------------|
| MOUNTING TYPE | Surface |
| LIGHT DISTRIBUTION | Directa |
| POWER SUPPLY | 230V / 50/60 Hz |
| WARRANTY | 2 Years |
| FINISHING | Brushed Aluminum |
| CONTROL | ON/OFF |



LED FEATURES

| | |
|----------------------|-----------------|
| LUMINOUS EFFICIENCY | UP TO 92 lm/W |
| CRI | CRI>85 |
| LIFESPAN | 50.000 Hours |
| STEPS MACADAM | 4 Steps MacAdam |
| LUMEN MAINTENANCE | L90/B50 |
| PHOTOBIOLOGICAL RISK | RG0 |

TECHNICAL DRAWING

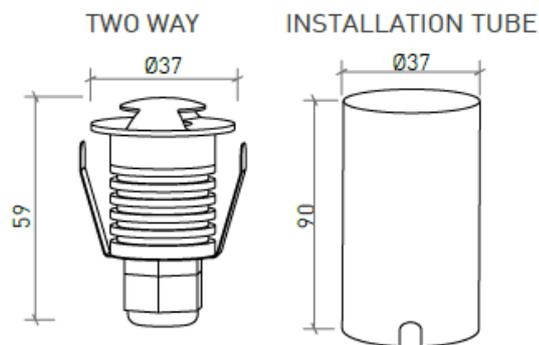

ICONOGRAPHY



 BENNET TWO WAYS 1W
PRODUCT TABLE AND TECHNICAL SPECIFICATIONS - CRI>85

| LENGTH | POWER | FINISHING | CONTROL TYPE | BEAM ANGLE | LED LUMENS | LUMINAIRE LM | COLOR TEMP. | CODE |
|--------|-------|-----------|--------------|------------|------------|--------------|-------------|-----------------|
| 37 | 1 | BAL | NF | 70°H/10°V | 92 | 44 | 3000K | 601.85.70.30.FI |
| 37 | 1 | BAL | NF | 70°H/10°V | 101 | 49 | 4000K | 601.85.70.40.FI |

SELECT YOUR PREFERRED
OPTION

CONTROL TYPE XX
ON/OFF NF

FINISHING FI
Brushed Aluminum BAL

ACCESSORIES

| | | | |
|--|--|---|-----------|
|  | Waterproof box Waterproof box | - | 4080-1030 |
|  | Output cable gland Output cable gland | - | 4080-1031 |
|  | Cover for waterproof box Cover for waterproof box | - | 4080-1033 |
|  | Driver (3-5 luminaires) Driver (3-5 luminaires) | - | 8015-0224 |
|  | Driver (1-3 luminaires) Driver (1-3 luminaires) | - | 8015-0226 |

